




**Part Number :** [2125161002](#)

**Product Description :** Mini-Fit Max Terminal Position Assurance (TPA) Retainer, 4.20mm Pitch, UL 94V-0, Glow-Wire Capable, 2 Circuit, Natural

**Series Number :** 212516

**Status :** Active

**Product Category :** Connector Accessories

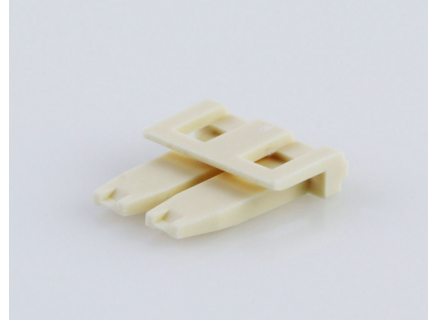

---

## Documents & Resources

### Drawings

[2125161002\\_sd.pdf](#)

### 3D Models and Design Files

[2125161002\\_stp.zip](#)

### Specifications


[2125150000-PS-000.pdf](#)

[2125150000-TS-000.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Connector Accessories
Series	212516
Description	Mini-Fit Max Terminal Position Assurance (TPA) Retainer, 4.20mm Pitch, UL 94V-0, Glow-Wire Capable, 2 Circuit, Natural
Component Type	Terminal Position Assurance
Product Name	Mini-Fit Max
UPC	193264598212

### Physical

Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Natural
Material - Resin	Nylon
Net Weight	0.160/g
Number of Rows	1
Packaging Type	Bag
Temperature Range - Operating	-40° to +105°C

### Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

---

### Use with Part(s)

Description	Part Number
-------------	-------------

Mini-Fit Max Receptacle Housing, Dual Row, UL 94V-0, 4 Circuits, Glow-Wire Capable, Black	<u>2125141004</u>
---	-------------------

---

---

This document was generated on Oct 11, 2024