

15

1501 04


Jack connectors



Jack chassis socket acc. to JIS C 6560 JC25J3A, 2.5 mm, 3 poles/stereo, angular version, with metal collar, for printed circuit boards

15

1501 04

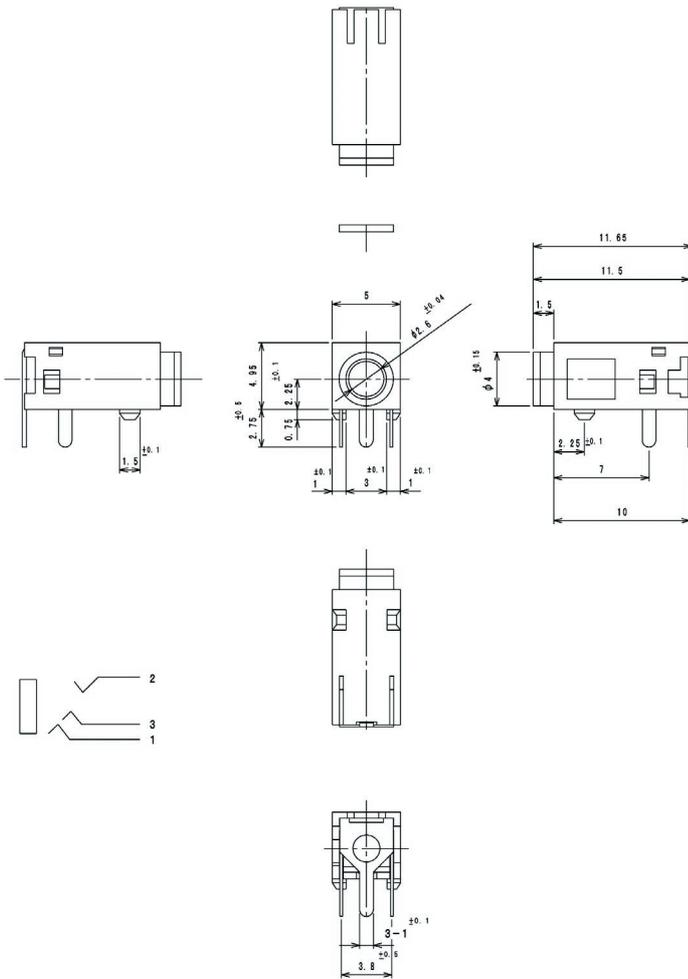

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body PBT GF, V-0 according to UL94
Contact spring Cu alloy, tin-plated

Mechanical data


Mating cycles ≥ 5000
Insertion force 5–20 N
Withdrawal force 4–20 N

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 50 m Ω
Rated current 0,5 A
Rated voltage 34 V AC/DC
Rated impulse voltage 500 V/60 s
Insulation resistance ≥ 100 M Ω

Associated products

Counterparts
☑ KLS 13



*a printed circuit board layout, solder side view

15

1501 04

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1501 04	3	500	500

Packaging:

in bulk, in a cardboard box or a plastic bag