

MATERIAL 材料:


HOUSING 外壳: PBT,UL94V-0,BLACK.
 TERMINAL 端子: PHOSPHOR BRONZE , $\varnothing=0.46\text{MM}$,
 GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:


DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE
 INSERTION FORCE 插入力: 2.2KG.F MAX
 RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG
 OPERATING TEMPERATURE 工作温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
 STORAGE TEMPERATURE 储存温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
 ALL CRITICAL DIMENSIONS WITH ""

ELECTRICAL 电动:


VOLTAGE 电压:125 VOLTS AC
 CURRENT RATING 额定电流:1.5AMP
 DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN
 INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL
 AFTER 500V DC FOR 1 MINUTE
 CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX
 INITIAL 50 MILLIOHMS MAX.AFTER
 DURABILITY TEST

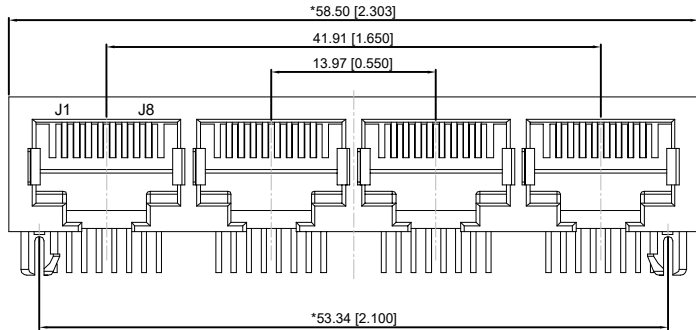


FRONT VIEW

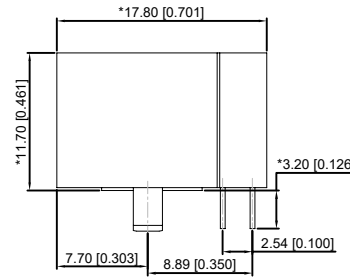

RIGHT SIDE VIEW

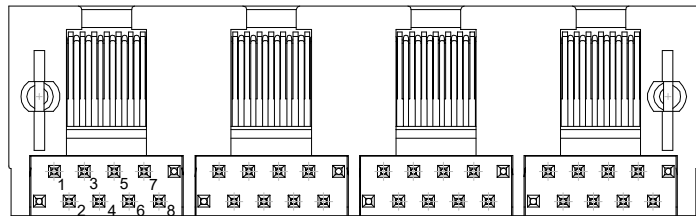

BOTTOM VIEW

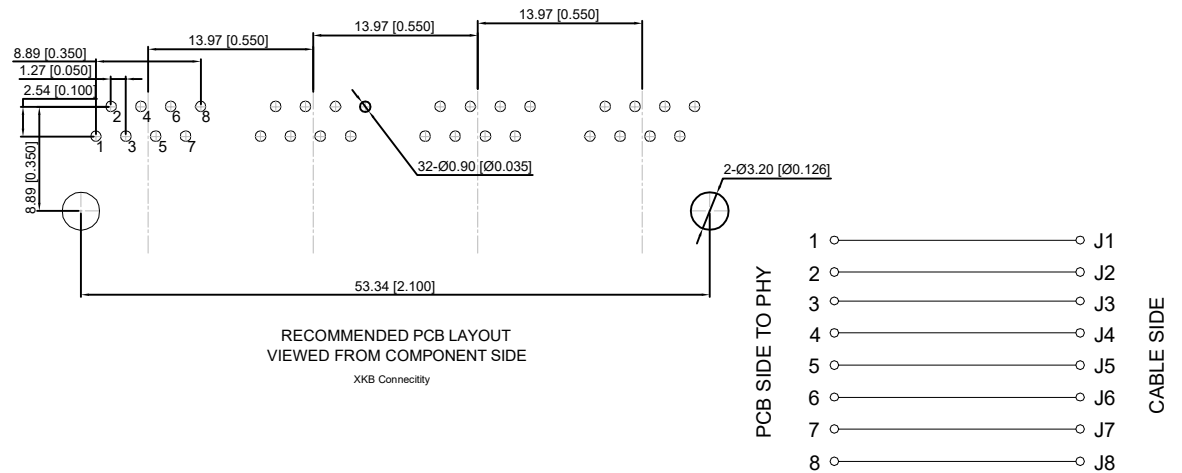

RECOMMENDED PCB LAYOUT
 VIEWED FROM COMPONENT SIDE

XKB Connectivity

					ANGLAR	$\pm 5^{\circ}$	DSND		DATE		SCALE: N/A	MODEL TYPE: RJ JACK		
ΔX					$L \leq 4$	± 0.2	DWN		DATE		VIEW:	PART NO.:		
ΔX					$4 < L \leq 16$	± 0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:		
ΔX					$16 < L \leq 63$	± 0.4	APPD		DATE		SIZE: A4	X14CBIWB1DY1027		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	$L > 63$	± 0.5	XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES						1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn														