


**DIMENSIONS: mm**

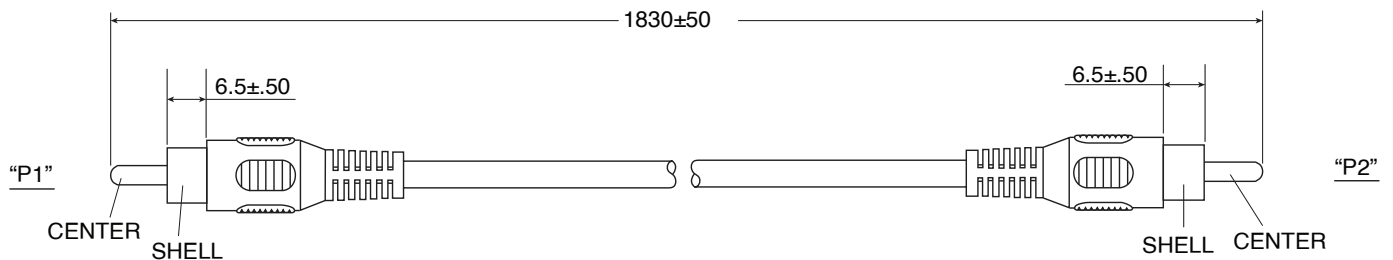

CONNECTION		
P1	WIRE COLOR	P2
CENTER	WHITE	CENTER
SHELL	SPIRAL	SHELL

**SPECIFICATIONS:**

- OPERATION TEMPERATURE : -10°C~+80°C
- INSULATION RESISTANCE : DC/250V 10MΩ MIN.
- WITHSTAND VOLTAGE : AC/250V 2mA, FOR ONE MINUTE.
- CONTINUITY RESISTANCE : 3Ω MAX.
- TENSILE STRENGTH : RCA/M OVERMOLD TO CABLE WITHSTAND 30N(3KGF) PULL MIN. FOR ONE MINUTE

**Note:** RoHS Compliant

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[172-181157-E](#)