

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面新增2~4pin数样式说明, PIN数表尺寸变更, 升级整理图面	2024.11.12	阿树

PART NO.:

X2011 W R S-XX A-9T SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

■SPECIFICATIONS

- Voltage rating:125V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Welding Way: S-SMT
⑤Row No.Pin No:XX-02~16Pin
⑥Plug the Pin&Special NO:
A-With Located Block
⑦Material:9T-PA9T UL94V-0
⑧Planting: SN-Bright tin plating
⑨Color:Blank-Natural Color

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
2	2.00	8.00	4.80	10	18.00	24.00	20.80
3	4.00	10.00	6.80	11	20.00	26.00	22.80
4	6.00	12.00	8.80	12	22.00	28.00	24.80
5	8.00	14.00	10.80	13	24.00	30.00	26.80
6	10.00	16.00	12.80	14	26.00	32.00	28.80
7	12.00	18.00	14.80	15	28.00	34.00	30.80
8	14.00	20.00	16.80	16	30.00	36.00	32.80
9	16.00	22.00	18.80				

X2011WRS-XXA-9TSN	PA9T UL 94V-0	Brass	Phosphor Bronze	Tin-Plated	X2011H-A
PART NO	Material	Material(pin)	Material(Solder Tab)	Finish(Pin and Solder tab)	Suitable XKB Terminal







AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	





DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2011WRS-XXA-9TSN
APPROVED		SIZE:	A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

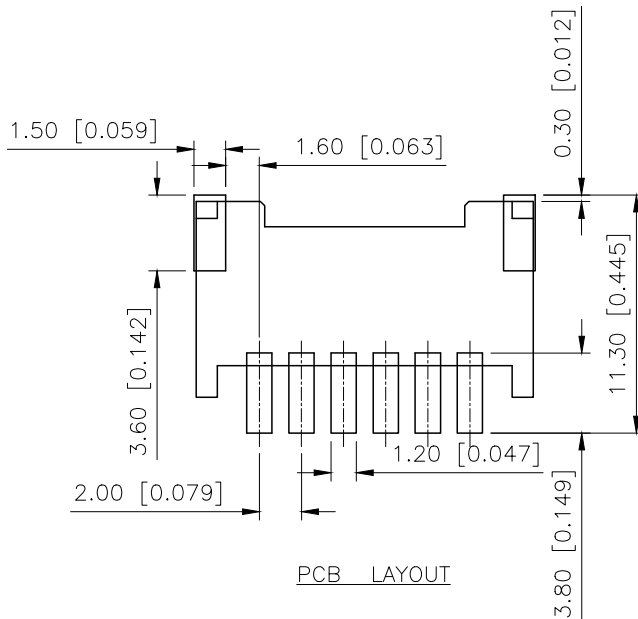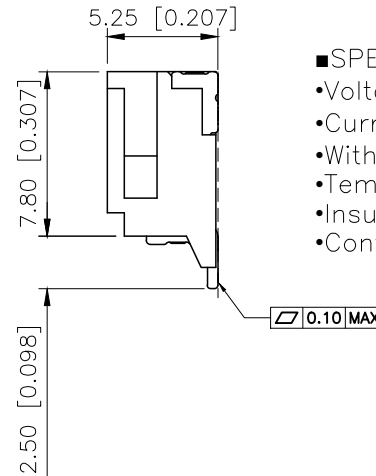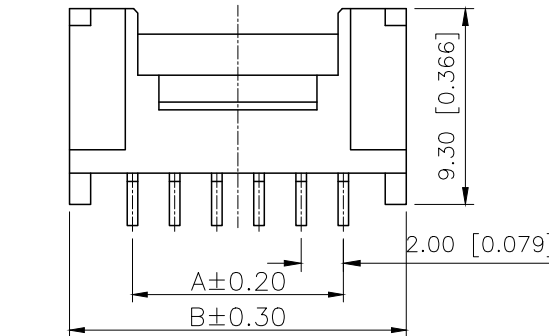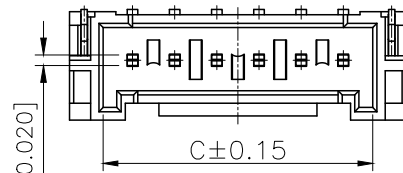

无定位槽



此处连体

此处连体

2P

3P/4P