




Dimensions: [mm]

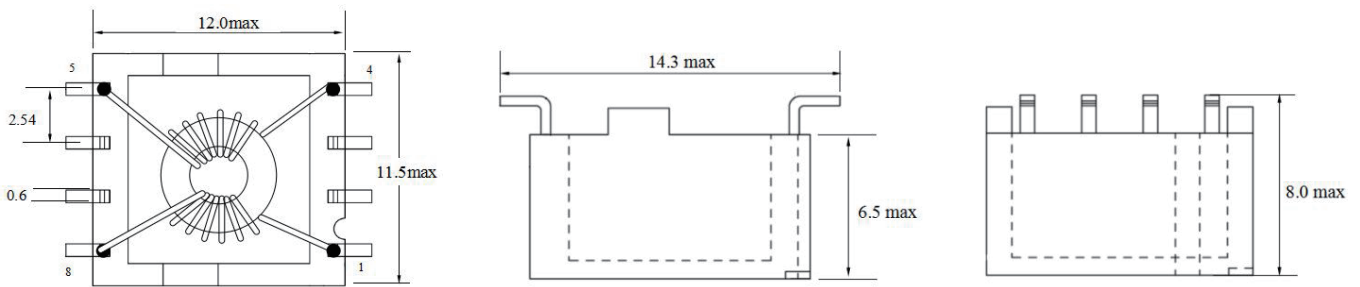

Schematic:



Land Pattern:



Electrical Properties:

Properties	Inductance (uH)	Inductance (uH)	IR (A)	DCR (mΩ)
Value	320	224	3.5	25
Tolerance	typ.	min.		max.
Test Condition	@ 10kHz/0.3V	@ 10kHz/0.3V		

Information:

Operating Temperature: -55°C to +125°C

Executive Standard: 工业级QJ/PWV779-2013、普军QJ/PWV745-2013、七专QJ/PWV744-2013

规格编号:

- SCM 121180 - 321 Y
 ① ② ③ ④ ⑤

- 1: 军级符号: J 表示普军, G 表示七专, 缺省表示工业级
- 2: 共模电感器
- 3: 产品尺寸
- 4: 电感量代码
- 5: 电感量允许偏差, Y 为特殊偏差

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 1/1	
				APPROVAL: HD	
				SIZE:	DESCRIPTION:
A	25-NOV-19	PDF	CY	PACKING UNIT:	PART NO: SCM121180-321Y
REV	DATE	FILE	BY		