




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.22	阿树

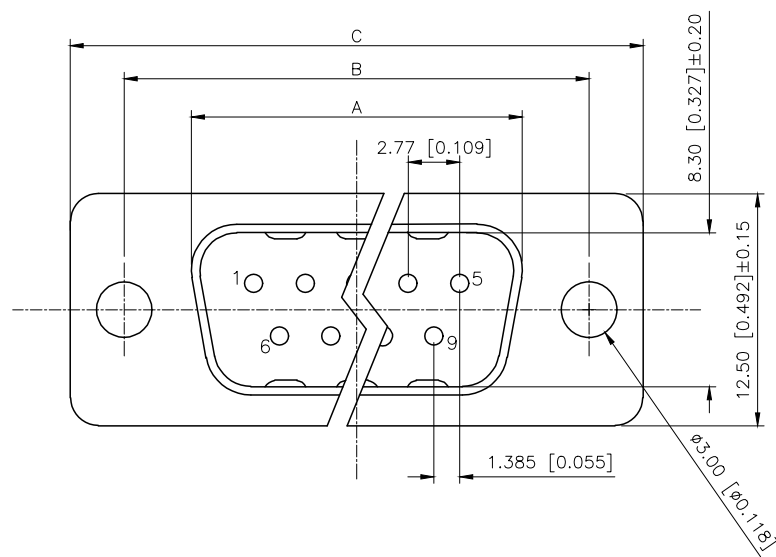

Specifications:
规格:
1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
2.Current rating:3A AC/DC
额定电流: 3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
4.Temperature range: -55℃-+105℃
温度范围: -55℃-+105℃
5.Insulation resistance:1000MΩ MIN
绝缘电阻:1000MΩ MIN
6.Contact resistance:30mΩ Max
接触电阻: 30mΩ Max
Material:
材料:
7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD,镀镍/镀锡/镀金
9.Terminal:Copper alloy
端子: 铜合金

PART NO.:
X01 XX W X X X X
① ② ③ ④ ⑤ ⑥ ⑦
①Series NO.
②Row No.Pin No.XX-09;15;25;37
③Welding Board Angle :W-Male
④T: Tradutional C: Car-pin
⑤Planting Category: 1:1U' 2:2U' 3:3U' 4:5U' 5:15U' 6:30U'
⑥Color:B-BLACK W-White BL-Blue

NUMBER OF POSITIONS	DIMENSION			
	A±0.25	B±0.13	C±0.38	D±0.25
9	18.00	24.99	30.80	19.28
15	26.50	33.32	39.20	27.51
25	40.00	47.04	53.05	41.28
37	56.60	63.50	69.40	57.71

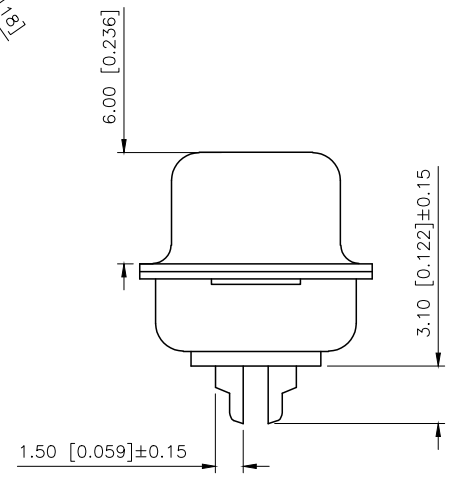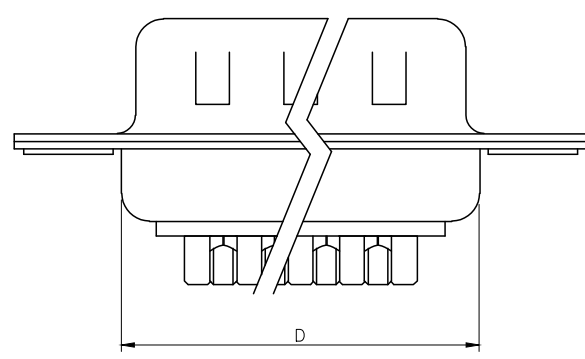

铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X01XXWXXXX
APPROVED		SIZE: A4	DWG NO.: