

- NOTES:
- HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR: BLACK
 - TERMINAL/GROUND PLANE: PHOSPHOR BRONZE
PLATING: 10μ GOLD IN CONTACT AREA, MATTE TIN ON TALL.
 - Operating Temp Range: -55 to +125
 - Current Rating:
Contact : 1.3A per pin
Ground Plane : 10.1A per ground plane
 - Voltage Rating : 225 VAC
 - Max Cycles : 100 VAC
 - Contact resistance: 50m

No. of Contacts	Dimensions		
	A.	B.	C.
40	20.00	18.48	0.10
80	40.00	38.48	0.10
120	60.00	58.48	0.15

PART NO:



BHTE08- XXX V0X G10 T

220:40pin
240:80pin
260:120pin


G10 : AU 10U"/TIN

01: 合高 : 5.0mm
*02: 合高 : 8.0mm

*备注 : 02合高目前仅开发2x40pin

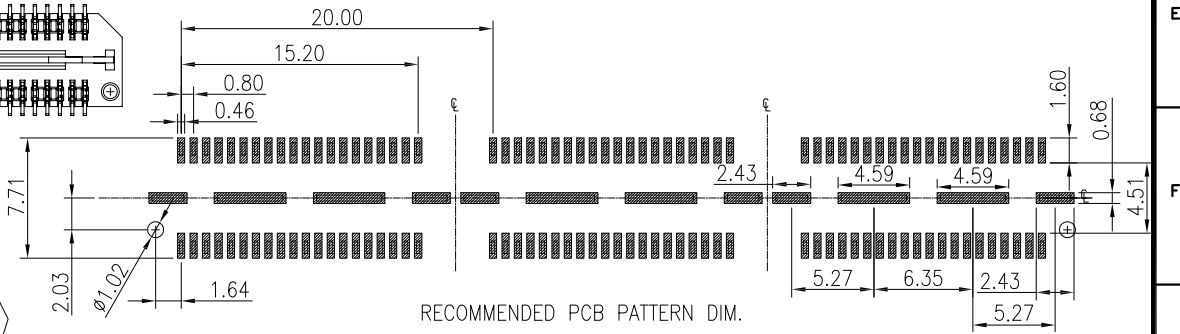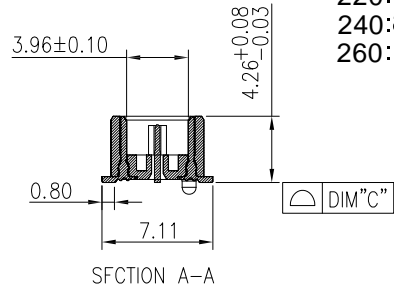

TOLERANCE : ±0.05

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	LIUSHENGYU	2018/11/08	SCALE	FIT		
A/1	2018/11/08	NEW			X.X	±0.40	DESIGN	LIUSHENGYU	2018/11/08	UNIT	mm	PART NO. BHTE08- XXXV0XG10 T
					X.XX	±0.25	CHECK	LVHAIXIN	2018/11/08	SIZE	A4	
					X.XXX	±0.15	APPROVE	LVHAIXIN	2018/11/08	SHEET	1/2	DWG.No.
					Angle	±3°				PROJ.		