

3031200

<https://www.phoenixcontact.com/us/products/3031200>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 17.5 A, number of connections: 4, connection method: Spring-cage connection, 1 level, Rated cross section: 1.5 mm², cross section: 0.08 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: green

Your advantages

- Cross connection to any number of terminal blocks with the consistent FBS ... plug-in bridge system
- Compact potential distributors, the double connection enables four conductors to be connected on one potential
- Tested for railway applications

Commercial data

Item number	3031200
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE02
Product key	BE2113
GTIN	4055626136455
Weight per piece (including packing)	7.709 g
Weight per piece (excluding packing)	7.709 g
Customs tariff number	85369010
Country of origin	DE

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Technical data

Product properties

Product type	Multi-conductor terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
	Process industry
Number of connections	4
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	4
Nominal cross section	1.5 mm ²

1 level

Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A1
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²
Cross section AWG	28 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	28 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	17.5 A (with 1.5 mm ² conductor cross section)
Maximum load current	17.5 A (in case of a 1.5 mm ² conductor cross section, the maximum load current must not be exceeded by the total current of all connected conductors.)
Nominal voltage	500 V
Nominal cross section	1.5 mm ²

Ex data

Rated data (ATEX/IECEx)

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Identification	Ex II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	3030514 D-ST 2,5-QUATTRO 3030815 ATP-ST QUATTRO 3036602 DS-ST 2,5 1204504 SZF 0-0,4X2,5 3022276 CLIPFIX 35-5 3022218 CLIPFIX 35
List of bridges	Plug-in bridge / FBS 2-4 / 3030116 Plug-in bridge / FBS 3-4 / 3030129 Plug-in bridge / FBS 4-4 / 3030132 Plug-in bridge / FBS 5-4 / 3030145 Plug-in bridge / FBS 10-4 / 3030158 Plug-in bridge / FBS 20-4 / 3030352
Bridge data	16.5 A / 1.5 mm ²
Ex temperature increase	40 K (19.7 A / 1.5 mm ²)
Rated voltage	440 V
for bridging with bridge	440 V
- At bridging between non-adjacent terminal blocks	352 V
- At bridging between non-adjacent terminal blocks via PE terminal block	352 V
- At cut-to-length bridging with cover	220 V
- At cut-to-length bridging with partition plate	275 V
Rated insulation voltage	400 V
output	(Permanent)

Ex level General

Rated current	17.5 A
Maximum load current	17.5 A
Contact resistance	1.54 mΩ

Ex connection data General

Nominal cross section	1.5 mm ²
Rated cross section AWG	16
Connection capacity rigid	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16
Connection capacity flexible	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16

Dimensions

Width	4.2 mm
End cover width	2.2 mm
Height	72 mm
Depth on NS 35/7,5	36.5 mm
Depth on NS 35/15	44 mm

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Material specifications

Color	green
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

ST 1,5-QUATTRO GN - Feed-through terminal block


3031200

<https://www.phoenixcontact.com/us/products/3031200>



Drawings

Circuit diagram

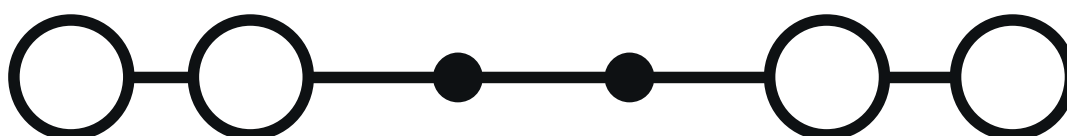

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3031200>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	15 A	26 - 14	-
Use group C	300 V	15 A	26 - 14	-

 IECEE CB Scheme Approval ID: DE1-63027_A1				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	500 V	17.5 A	-	0.2 - 1.5

 LR Approval ID: LR2014888TA				
---	--	--	--	--

 KR Approval ID: HMB17372-EL002				
--	--	--	--	--

 NK Approval ID: 09 ME 140				
---	--	--	--	--

 BV Approval ID: 13403/D0 BV				
---	--	--	--	--

 VDE Zeichengenehmigung Approval ID: 40009031				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	500 V	17.5 A	-	0.2 - 1.5

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	15 A	26 - 14	-
Use group C				

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

	300 V	15 A	26 - 14	-
Use group D				
	600 V	5 A	26 - 14	-

DNV

Approval ID: TAE00001CS



ATEX

Approval ID: KEMA01ATEX2129U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Type examination certificate	440 V	17.5 A	-	0.08 - 1.5



EAC Ex

Approval ID: RU C-DE.HA91.B.00066



IECEx

Approval ID: IECEx KEM 06.0043U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	440 V	17.5 A	-	0.08 - 1.5



CCC

Approval ID: 2020322313000621



UKCA-EX

Approval ID: DEKRA 21UKEX0302U

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 2-4 - Plug-in bridge

3030116

<https://www.phoenixcontact.com/us/products/3030116>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 17.5 A

FBS 3-4 - Plug-in bridge

3030129

<https://www.phoenixcontact.com/us/products/3030129>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 4-4 - Plug-in bridge

3030132

<https://www.phoenixcontact.com/us/products/3030132>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

FBS 5-4 - Plug-in bridge

3030145

<https://www.phoenixcontact.com/us/products/3030145>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 10-4 - Plug-in bridge

3030158

<https://www.phoenixcontact.com/us/products/3030158>



Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 17.5 A

FBS 20-4 - Plug-in bridge

3030352

<https://www.phoenixcontact.com/us/products/3030352>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 2-4 BU - Plug-in bridge

3030117

<https://www.phoenixcontact.com/us/products/3030117>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 17.5 A

FBS 3-4 BU - Plug-in bridge

3030130

<https://www.phoenixcontact.com/us/products/3030130>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 4-4 BU - Plug-in bridge

3030133

<https://www.phoenixcontact.com/us/products/3030133>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 17.5 A

FBS 5-4 BU - Plug-in bridge

3030146

<https://www.phoenixcontact.com/us/products/3030146>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 10-4 BU - Plug-in bridge

3036851

<https://www.phoenixcontact.com/us/products/3036851>



Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 17.5 A

FBS 20-4 BU - Plug-in bridge

3030353

<https://www.phoenixcontact.com/us/products/3030353>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 2-4 GY - Plug-in bridge

3030118

<https://www.phoenixcontact.com/us/products/3030118>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 17.5 A

FBS 3-4 GY - Plug-in bridge

3030131

<https://www.phoenixcontact.com/us/products/3030131>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

FBS 4-4 GY - Plug-in bridge

3030134

<https://www.phoenixcontact.com/us/products/3030134>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 17.5 A

FBS 5-4 GY - Plug-in bridge

3030147

<https://www.phoenixcontact.com/us/products/3030147>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 17.5 A

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

RB ST (2,5/4)-1,5 - Reducing bridge

3038943

<https://www.phoenixcontact.com/us/products/3038943>



Reducing bridge, pitch: 7.1 mm, number of positions: 2, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

D-ST 2,5-QUATTRO - End cover

3030514

<https://www.phoenixcontact.com/us/products/3030514>

End cover, depth: 29.1 mm, width: 2.2 mm, height: 72.2 mm, color: gray



ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>

Reducing plug, number of positions: 1, color: gray



ATP-ST QUATTRO - Partition plate

3030815

<https://www.phoenixcontact.com/us/products/3030815>

Partition plate, depth: 45 mm, width: 2 mm, height: 90.9 mm, color: gray



ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

DS-ST 2,5 - Cover segment

3036602

<https://www.phoenixcontact.com/us/products/3036602>




End cover segments, large segment: 32.25 x 13.83 x 0.9, small segment: 22.65 x 11.65 x 0.9, color: gray

WST 1,5 - Warning cover

3030958

<https://www.phoenixcontact.com/us/products/3030958>



Warning cover, Strip, yellow, labeled, mounting type: plug in, for terminal block width: 4.25 mm, lettering field size: 4.25 x 3.55 mm, Number of individual labels: 5

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



D-ST 2,5-QUATTRO-0,8 OG - End cover

3030513

<https://www.phoenixcontact.com/us/products/3030513>

End cover, depth: 29 mm, width: 0.8 mm, height: 72 mm, color: orange



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

ZB 4 :UNBEDRUCKT - Zack marker strip

0805001

<https://www.phoenixcontact.com/us/products/0805001>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 4.2 x 10.5 mm, Number of individual labels: 10

ZB 4 CUS - Zack marker strip

0824951

<https://www.phoenixcontact.com/us/products/0824951>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 4.2 mm, lettering field size: 4.2 x 10.5 mm, Number of individual labels: 10

ST 1,5-QUATTRO GN - Feed-through terminal block




3031200

<https://www.phoenixcontact.com/us/products/3031200>

ZB 4,LGS:FORTL.ZAHLEN - Zack marker strip

0805739

<https://www.phoenixcontact.com/us/products/0805739>




Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 4.2 x 10.5 mm, Number of individual labels: 10

ZB 4,QR:FORTL.ZAHLEN - Zack marker strip

0805807

<https://www.phoenixcontact.com/us/products/0805807>



Zack marker strip, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 4.2 x 10.5 mm, Number of individual labels: 10

ST 1,5-QUATTRO GN - Feed-through terminal block




3031200

<https://www.phoenixcontact.com/us/products/3031200>

UC-TM 4 - Marker for terminal blocks

0818111

<https://www.phoenixcontact.com/us/products/0818111>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

UC-TM 4 CUS - Marker for terminal blocks

0824573

<https://www.phoenixcontact.com/us/products/0824573>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

UCT-TM 4 - Marker for terminal blocks

0828732

<https://www.phoenixcontact.com/us/products/0828732>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 84

UCT-TM 4 CUS - Marker for terminal blocks

0829588

<https://www.phoenixcontact.com/us/products/0829588>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 84

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

STP 4-2-ZB - Marker carriers

3038613

<https://www.phoenixcontact.com/us/products/3038613>



Marker carriers, snaps into ST 1,5... spring-cage terminal blocks, can be marked with UC-TM 4, UC-TMF 4, UCT-TM 4, UCT-TMF 4, ZB 4, or ZBF 4, gray, unlabeled, mounting type: snapped, lettering field size: 4 x 10.5 mm

ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/us/products/0808587>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

ZBF 4 CUS - Zack Marker strip, flat

0825023

<https://www.phoenixcontact.com/us/products/0825023>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ZBF 4,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808626

<https://www.phoenixcontact.com/us/products/0808626>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

ZBF 4,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808820

<https://www.phoenixcontact.com/us/products/0808820>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ZBF 4,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810818

<https://www.phoenixcontact.com/us/products/0810818>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 5.15 x 4.15 mm, Number of individual labels: 10

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

ZBF 4,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810850

<https://www.phoenixcontact.com/us/products/0810850>




Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 5.15 x 4.15 mm, Number of individual labels: 10

UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/us/products/0818166>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

ST 1,5-QUATTRO GN - Feed-through terminal block




3031200

<https://www.phoenixcontact.com/us/products/3031200>

UC-TMF 4 CUS - Marker for terminal blocks

0824630

<https://www.phoenixcontact.com/us/products/0824630>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/us/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



UCT-TMF 4 CUS - Marker for terminal blocks

0829651

<https://www.phoenixcontact.com/us/products/0829651>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



ST 1,5-QUATTRO GN - Feed-through terminal block



3031200


<https://www.phoenixcontact.com/us/products/3031200>

MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



ISH 1,5/0,2 - Insulating sleeve

3206131

<https://www.phoenixcontact.com/us/products/3206131>

Insulating sleeve, color: white



ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

ISH 1,5/0,5 - Insulating sleeve

3031034

<https://www.phoenixcontact.com/us/products/3031034>



Insulating sleeve, color: gray

PAI-4 - Test adapter

3030925

<https://www.phoenixcontact.com/us/products/3030925>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: gray

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

PS-4 - Test plug

3030970

<https://www.phoenixcontact.com/us/products/3030970>



Test plug, Modular test plug, number of positions: 1, color: red

DP PS-4 - Spacer plate

3036712

<https://www.phoenixcontact.com/us/products/3036712>



Spacer plate, depth: 29 mm, width: 4.2 mm, height: 22.4 mm, number of positions: 1, color: red

ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

ST 1,5-QUATTRO GN - Feed-through terminal block

3031200

<https://www.phoenixcontact.com/us/products/3031200>




E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



ST 1,5-QUATTRO GN - Feed-through terminal block



3031200

<https://www.phoenixcontact.com/us/products/3031200>

E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/us/products/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com