


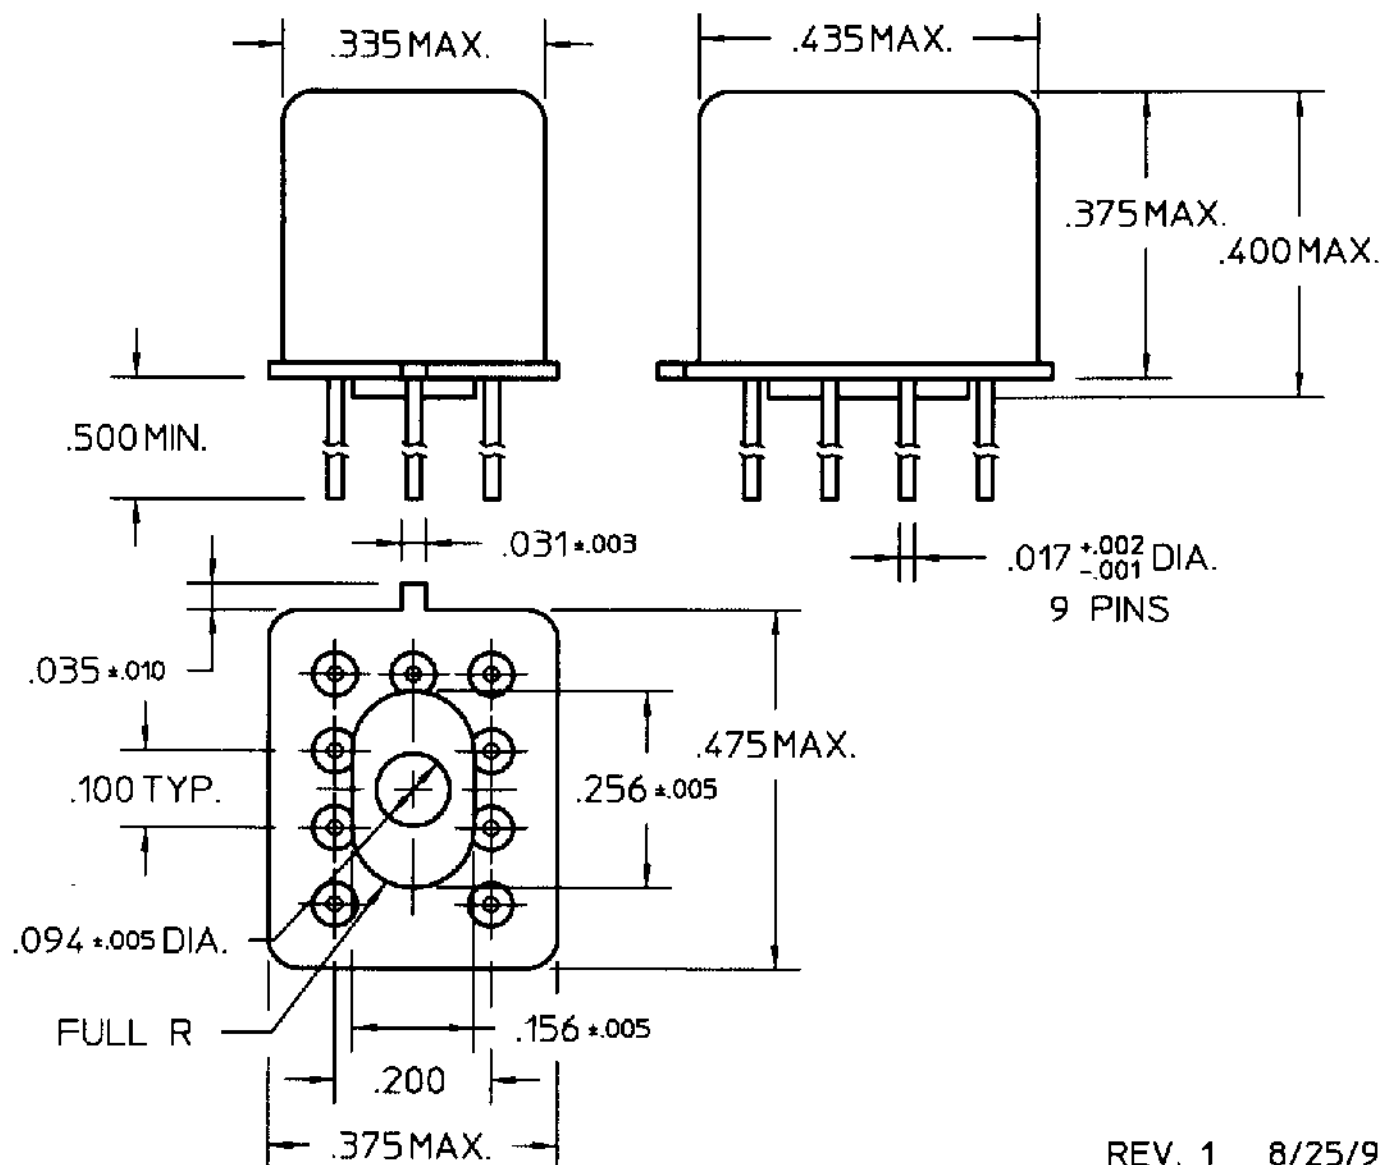


REV, 1 8/25/98

COIL: @ 25°C	
RESISTANCE	1600 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
GATE TURN-ON	4.3 VDC MAX.
GATE TURN-OFF	0.5 VDC MAX.
MUST OPERATE	10.6 VDC
MUST RELEASE	6.0 VDC MAX, 0.97 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

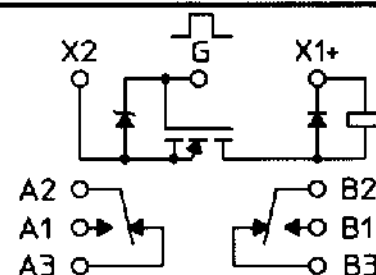

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/19/97 ~~CR~~ JERP 8/25/98

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M28776/7-011P

TYPE "MGST" RELAY

JMGST-18PW

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JMGST-18PW](#)