

6

5

4

3





2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	8719	RELEASED	5/7/08	
A		REDRAWN	5/9/16	AY/NP

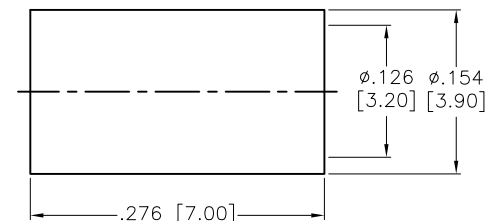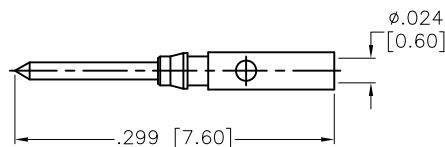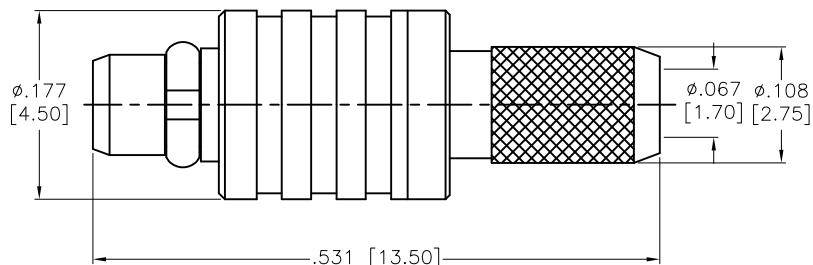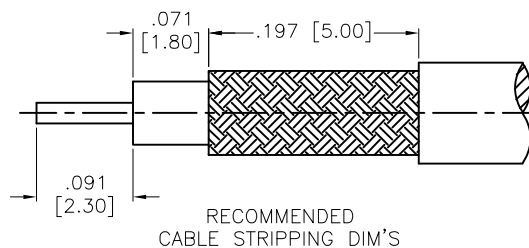

FERRULE	BRASS	GOLD
CONTACT PIN	BRASS	GOLD
RING	BE CU	GOLD
BODY	BRASS	GOLD
INSULATOR	PTFE	WHITE
BARREL	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:

Frequency Range: DC-6 GHz
 Normal Impedance: 50 ohm
 Operating voltage: 170 Volts max.
 Proof voltage: 500 Volts
 VSWR: 1.3 max. @ 1 GHz

Temperature Rating:

Operating temperature: -55°C to +155°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	∅X ± .10
.XX ± .020	∅XX ± .015
.XXX ± .015	∅XXX ± .010
HOLES	
APPROVALS	
DRAWN	DATE
SS	5/7/08
CHECKED	
APPROVED	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE
**RF CONNECTOR, TYPE MMCX, MALE CRIMP
 FOR RG174/U, 316/U, LMR-100, 50 OHM**

SIZE X	PART NO. RF12-06-T-02-50-G	REV. A
REF: S00277T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1