

INTERCONNECTS

SERIES 451 • .100" GRID INTERCONNECT HEADERS • DOUBLE ROW STRIPS

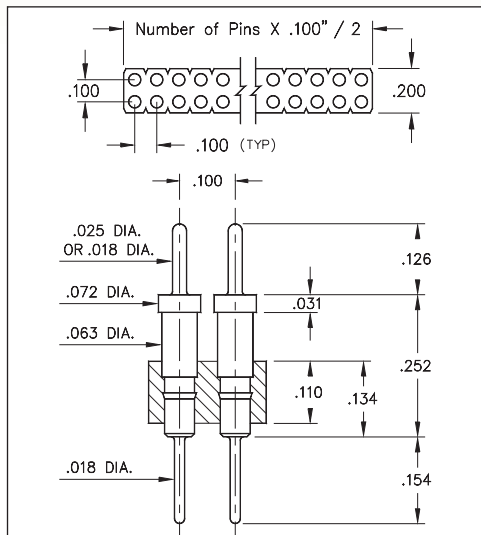


FIG. 1

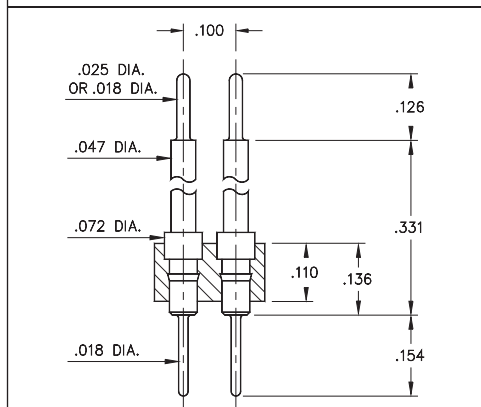


FIG. 2

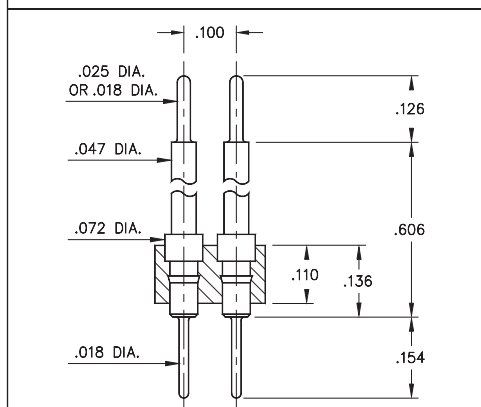


FIG. 3

- Series 451 interconnect header strips come in three lengths with .018" dia. pluggable solder tails at one end and .025" dia. pins at the other. Please see series:


451...003 uses pin #5503
451...004 uses pin #5504
451...005 uses pin #5505

- .018" pluggable solder tails are available at both ends. Please see series:

451...009 uses pin #5509
451...010 uses pin #5510
451...011 uses pin #5511

See pages 212 and 214 for details

- Insulators are high temperature thermoplastic, suitable for all soldering operations

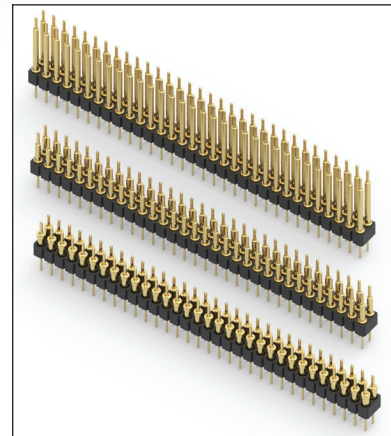

ORDERING INFORMATION

FIG. 1	Series 451...003	.018" / .025" Dia. Solder Tails
	451-10-2	-00-003000
	Specify number of pins	04-64
FIG. 2	Series 451...009	.018" / .018" Dia. Solder Tails
	451-10-2	-00-009000
	Specify number of pins	04-64
FIG. 3	Series 451...004	.018" / .025" Dia. Solder Tails
	451-10-2	-00-004000
	Specify number of pins	04-64
FIG. 3	Series 451...010	.018" / .018" Dia. Solder Tails
	451-10-2	-00-010000
	Specify number of pins	04-64
FIG. 3	Series 451...005	.018" / .025" Dia. Solder Tails
	451-10-2	-00-005000
	Specify number of pins	04-64
FIG. 3	Series 451...011	.018" / .018" Dia. Solder Tails
	451-10-2	-00-011000
	Specify number of pins	04-64
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating	10 μ Au	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[451-10-204-00-004000](#) [451-10-210-00-003000](#) [451-10-216-00-010000](#) [451-10-212-00-003000](#) [451-10-210-00-010000](#) [451-10-212-00-004000](#) [451-10-222-00-003000](#) [451-10-222-00-005000](#) [451-10-204-00-003000](#) [451-10-206-00-010000](#) [451-10-230-00-004000](#) [451-10-240-00-003000](#) [451-10-234-00-004000](#) [451-10-242-00-011000](#) [451-10-248-00-011000](#) [451-10-252-00-010000](#)