



## Main

|                               |  |
|-------------------------------|--|
| Range of product              | OsiSense XU  |
| Series name                   | Application  |
| Electronic sensor type        | Photo-electric sensor  |
| Sensor name                   | XUY  |
| Sensor design                 | Fork   |
| Detection system              | Thru beam  |
| Emission                      | Infrared LED, modulated  |
| Passage width                 | 0.2 in (5 mm)  |
| Passage depth                 | 2.32 in (59 mm)  |
| Material                      | Metal/plastic  |
| Supply circuit type           | DC   |
| Wiring technique              | 4-wire   |
| Discrete output type          | PNP and NPN  |
| Discrete output function      | 1 NO or 1 NC programmable  |
| Electrical connection         | 1 male connector M8, 4 pins  |
| Product specific application  | Detection of double sheet<br>Detection of labels<br>Detection of reference marks<br>Detection on vibrating rail<br>Detection on small conveyor |
| [Sn] nominal sensing distance | 0.2 in (5 mm)  |

## Complementary

|                                       |   |
|---------------------------------------|---|
| Enclosure material                    | Painted aluminium and polyamide/glass   |
| Keypad type                           | Green   |
| Minimum object diameter for detection | 0.01 in (0.2 mm)  |
| Type of output signal                 | Discrete  |
| Output type                           | Solid state   |
| Status LED                            | 1 LED (red) adjustment mode and keypad locking<br>1 LED (yellow) output state |
| [Us] rated supply voltage             | 12...24 V DC with reverse polarity protection                                 |
| Supply voltage limits                 | 10...30 V DC  |
| Switching capacity in mA              | 100 mA (overload and short-circuit protection)                                |
| Switching frequency                   | 10 kHz  |
| Voltage drop                          | < 2 V (closed state)  |
| Current consumption                   | 40 mA (no-load)   |
| Load capacitance                      | 330 nF  |
| Time response                         | -20...20 µs   |
| Setting-up                            | Sensitivity by numeric potentiometer  |
| Product weight                        | 0.42 lb(US) (0.19 kg)   |

## Environment

|                                       |  |
|---------------------------------------|--|
| product certifications                | CE<br>CULus  |
| ambient air temperature for operation | -4...140 °F (-20...60 °C)  |
| ambient air temperature for storage   | -22...176 °F (-30...80 °C)   |
| immunity to ambient light             | 10000 lux with natural light<br>5000 lux with incandescent bulb            |
| vibration resistance                  | 7 gn, amplitude = +/- 0.75 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| shock resistance                      | 30 gn (duration = 11 ms) conforming to IEC 60068-2-27                      |

|                         |                              |
|-------------------------|------------------------------|
| IP degree of protection | IP65 conforming to IEC 60529 |
|-------------------------|------------------------------|


## Offer Sustainability

|  |  |
|--|--|
| Not Green Premium product  | Not Green Premium product  |
| Compliant - since 0648 - Schneider Electric declaration of conformity  | Compliant - since 0648 - Schneider Electric declaration of conformity  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Dimensions

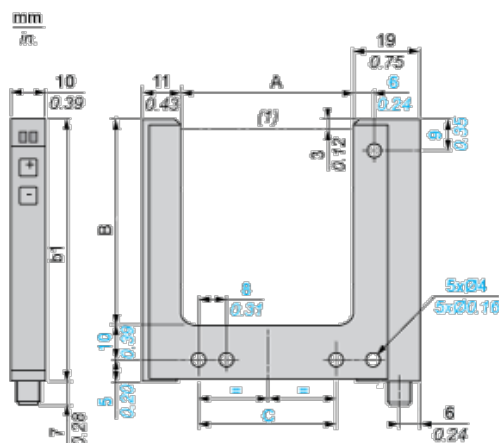

(1) Optical axis

Dimensions in mm


| A | B  | b1 | C  |
|---|----|----|----|
| 5 | 59 | 74 | 14 |

Dimensions in in.

| A    | B    | b1   | C    |
|------|------|------|------|
| 0.20 | 2.32 | 2.91 | 0.55 |


## Wiring Schemes

### M8 Connector



- 1 : BN: Brown
- 2 : WH: White
- 3 : BU: Blue
- 4 : BK: Black

4-Wire, PNP/NPN Outputs

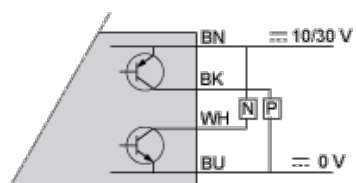

**BN** : Brown

**WH** :White

**BK** : Black

**BU** : Blue

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric:

[XUYFNEP60005](#)