

TE Internal #: 5558068-1 RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 3, Standard - Latch Down, 10 Position, Low Profile

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ45 Connectors



Modular Jack & Plug Interface Type: **RJ45** Port Configuration: **Single Port** Port Matrix Configuration: **1 x 1** Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: Standard

Features

Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB Ground
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of DCD Cround Taba	
Number of PCB Ground Tabs	2
Port Configuration	2 Single Port
Port Configuration	Single Port
Port Configuration Port Matrix Configuration	Single Port 1 x 1
Port Configuration Port Matrix Configuration Connector Contact Density	Single Port 1 x 1 Standard

Body Features

C For support call+1 800 522 6752

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 3, Standard - Latch Down, 10 Position, Low Profile



PCB Ground Tab Location	-3.05 mm[12 in]
Shield Plating Material	Tin
Shield Material	Copper Alloy
Modular Jack Latch Orientation	Standard - Latch Down
Connector Profile	Low
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1.5 A
Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Fermination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.56 mm[.14 in]
Mechanical Attachment	
Panel Mount Feature	With
Connector Mounting Type	Board Mount
Housing Features	
Mating Entry Location	Side
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Black
Housing Material	PCT Polyester
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	13.64 mm[.537 in]
Jsage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Operation/Application Indicator Type	Not Illuminated

C For support call+1 800 522 6752

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 3, Standard - Latch Down, 10 Position, Low Profile



Circuit Application	Signal
ndustry Standards	
UL Flammability Rating	UL 94V-0
Performance Category	Cat 3
Packaging Features	
Packaging Quantity	90
Packaging Method	Box & Tray, Tray
•	
or compliance documentation, visit the product page on TE.com>	Compliant
•	Compliant Compliant
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024 (241)
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE

ppm.

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 3, Standard - Latch Down, 10 Position, Low Profile





Customers Also Bought

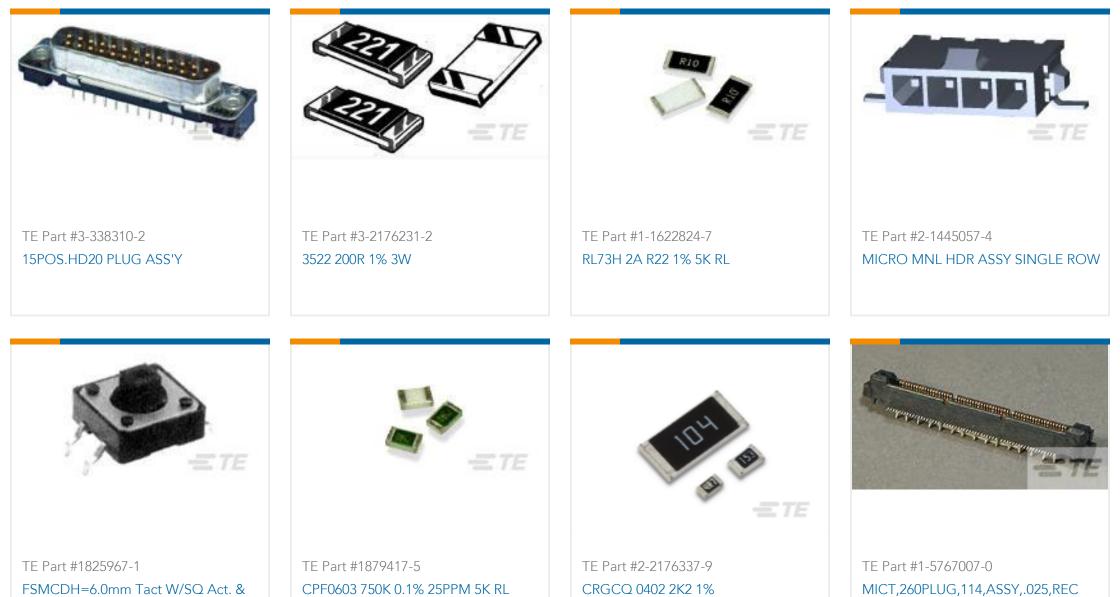

FSMCDH=6.0mm Tact W/SQ Act. & High Temp	CPF0603 750K 0.1% 25PPM 5K RL	CRGCQ 0402 2K2 1%	Ν
	-= TE		
TE Part #WPD136M6C-001	TE Part #G8N		
OMNI,ANT,136,380,760MHz	MOUNT,MGM,3/4,58A,NM CHR,STD, 12FT58A		

Documents

Product Drawings MJ ASSY,10POS,R/A,KEYED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5558068-1_B.2d_dxf.zip

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 3, Standard - Latch Down, 10 Position, Low Profile



English
Customer View Model

ENG_CVM_CVM_5558068-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5558068-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English