

ICP651321PA

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V
Safety Circuit

Specifications

Renata Type	ICP651321
IEC Designation	ICP071323
Part Number	100696
Contact Method:	Wire AWG 30
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	120 mAh
Minimum Capacity	110 mAh (0.2C cut off 3.0 V at 20°C)
Internal Impedance	< 370 mΩ / 50% SOC

Thickness (t)	Max 6.6 mm
Length (l)	Max 23.0 mm
Width (w)	Max 13.0 mm
Weight	~ 3.3 g


Charging Characteristic	CC/CV – Constant Current / Constant Voltage
Voltage	4.2 V CV
Current Normal	0.5 C CC – 60.0 mA
Max. Charging Current	1.0 C CC – 120 mA
Temperature at Charging	0 °C 45 °C

Discharge Characteristic	
Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 240 mA (for non continues discharge) 1.0 C – 120 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C (0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

Dimensions

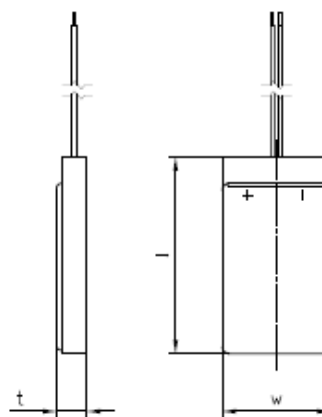

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. Li Ion ICP651321– 11.09

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Renata:](#)

[ICP651321PA](#)