

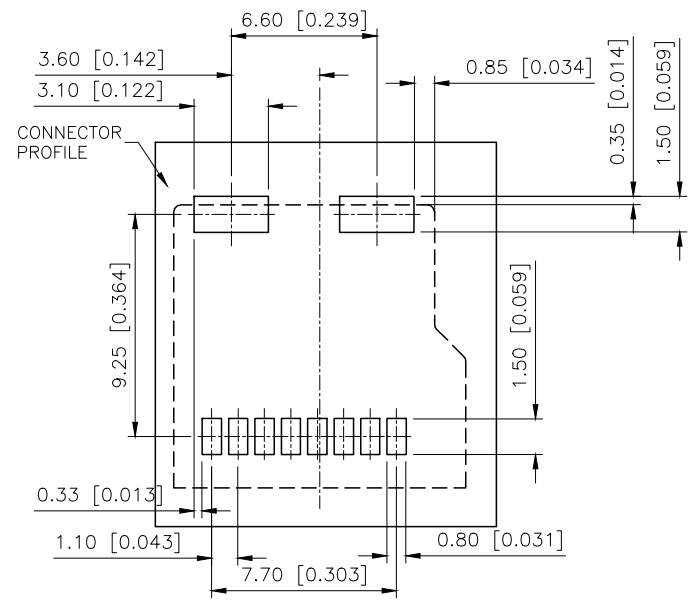
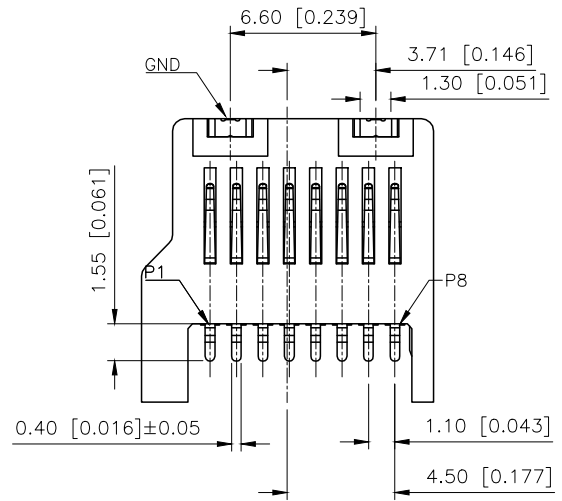


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X2	图面升级整理图面	2025.05.08	阿树

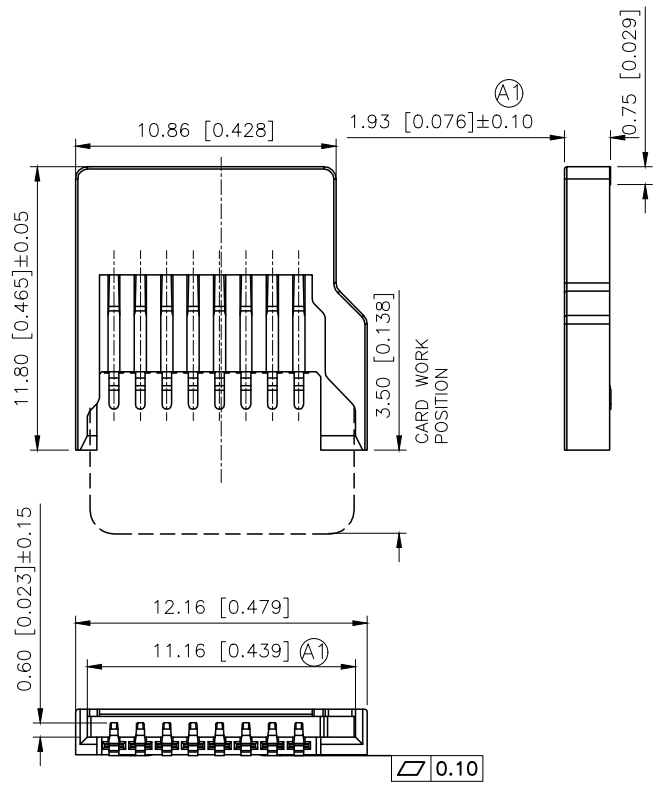


RECOMMENDED P.C.B. LAYOUT(TOP VIEW)
GENERAL TOLERANCE ±0.05

NOTES
(1) MATERIAL:
HOUSING: LCP MG350, UL 94V-0, 30%G/F FILLED;
COLOR: BLACK
CONTACT: COPPER ALLOY T=0.15mm
ROUND: STAINLESS T=0.15mm
(2) FINISH:
CONTACT: 1u" GOLD PLATING ON CONTACT AREA
Tin 80u" MIN PLATING ON SOLDER TAILS
50u" MIN NICKEL UNDERPLATING OVER ALL
GROUND: Sn 100u" MIN PLATING ON SOLDER TAILS
50u" MIN NICKEL UNDERPLATING OVER ALL
(3) PRODUCT SPECIFICATIONS:
VOLTAGE RATING: 50V
CURRENT RATING: 0.5A
INSULATION RESISTANCE: 500MEG.OHM MIN
CONTACT RESISTANCE: 50 MILL.OHM MAX
OPERATION TEMPERATURE: -20°~+85°
DURABILITY: 5000 CYCLES



Pin No	NAME	TYPE	DESCRIPTION
1	DAT2	1/0/PP	Date Line(bit2)
2	CD/DAT 3	1/0/PP	Card Detect/Date Lin(bit3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Colck
6	VSS	S	Supply Voltage Ground
7	DAT0	1/0/PP	Date Lin(bit0)
8	DAT1	1/0/PP	Date Lin(bit1)

AuGLAR	±5°	 <i>C o n n e c t i o n</i>	DESIGN	阿树	VIEW: 	MODEL TYPE: TF CARD CONN		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: XKTF-004		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A1