









ROHS

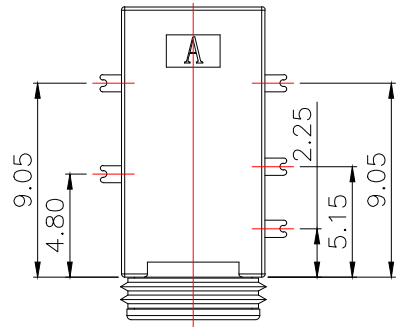

3D VIEW

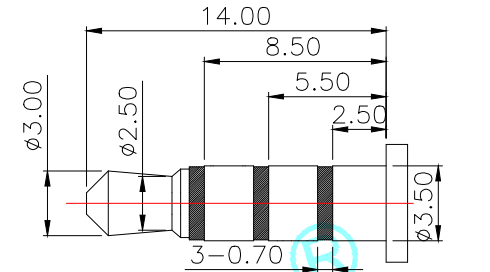

($\phi 3.50\text{mm}$ 4 POLE PLUG)

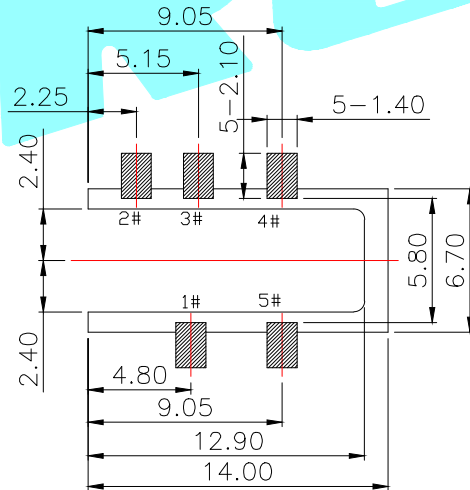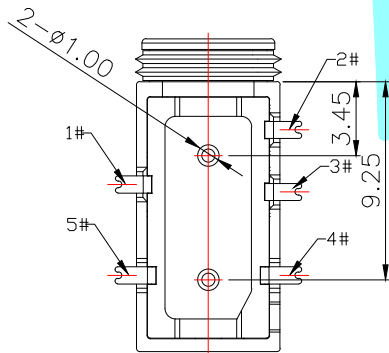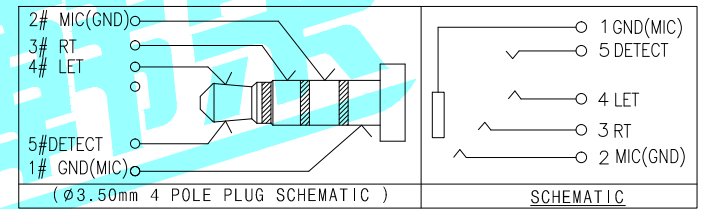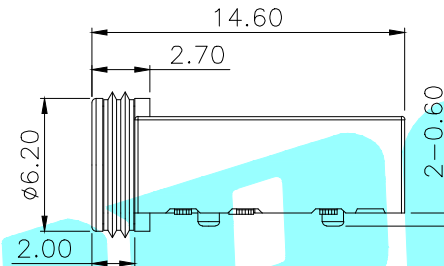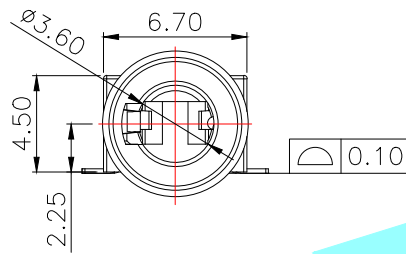

P.C.B LAYOUT(TOP view)

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 m Ω MAX.;
3. INSULATION RESISTANCE: 100M Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

| ③ | Waterproof ring | 1 | Silica gel | | | |
|------|-----------------|---------|---------------------|------------|-----------|--------|
| ② | Terminal | 5 | Phosphor bronze/SUS | Ni Plating | | |
| ① | Housing | 1 | HTP | Black | | |
| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |

| | | | | | | |
|----------------|--------|------------|-------|-------------------------|------------|-------|
| APPROVALS | | DATE | | ELECTRONICS CO.,LTD | | |
| DRAWN | LIUCAN | 2021.04.27 | | | | |
| CHECKED | | | | PART NO. | PJ-621B | |
| APPROVALS | | | | | | |
| TOLERANCES ARE | 30~以上 | ± 0.30 | ANGLE | UNIT: mm | SCALE: 1:1 | PROJ: |
| | 10~30 | ± 0.20 | | | | |
| | 5~10 | ± 0.15 | | | | |
| | ~ 5 | ± 0.10 | | | | |
| DRAWING NO. | | | | SHEET 1 OF 1 | | |

| | | | | | | |
|---------|---|-------|------------------|---------|--------|--------|
| ECN NO. | A | DATE. | NEW DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|---|-------|------------------|---------|--------|--------|