


GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

REV.	DATE	DESCRIPTION	BY	C'K'D'
B	2002-03-18	EC B20061	MF	
C	2002-11-26	EC B20192	MF	
D	2006-05-30	106-0059	AB	BKP
E	2006-07-04	106-0096	VIVEK	BKP

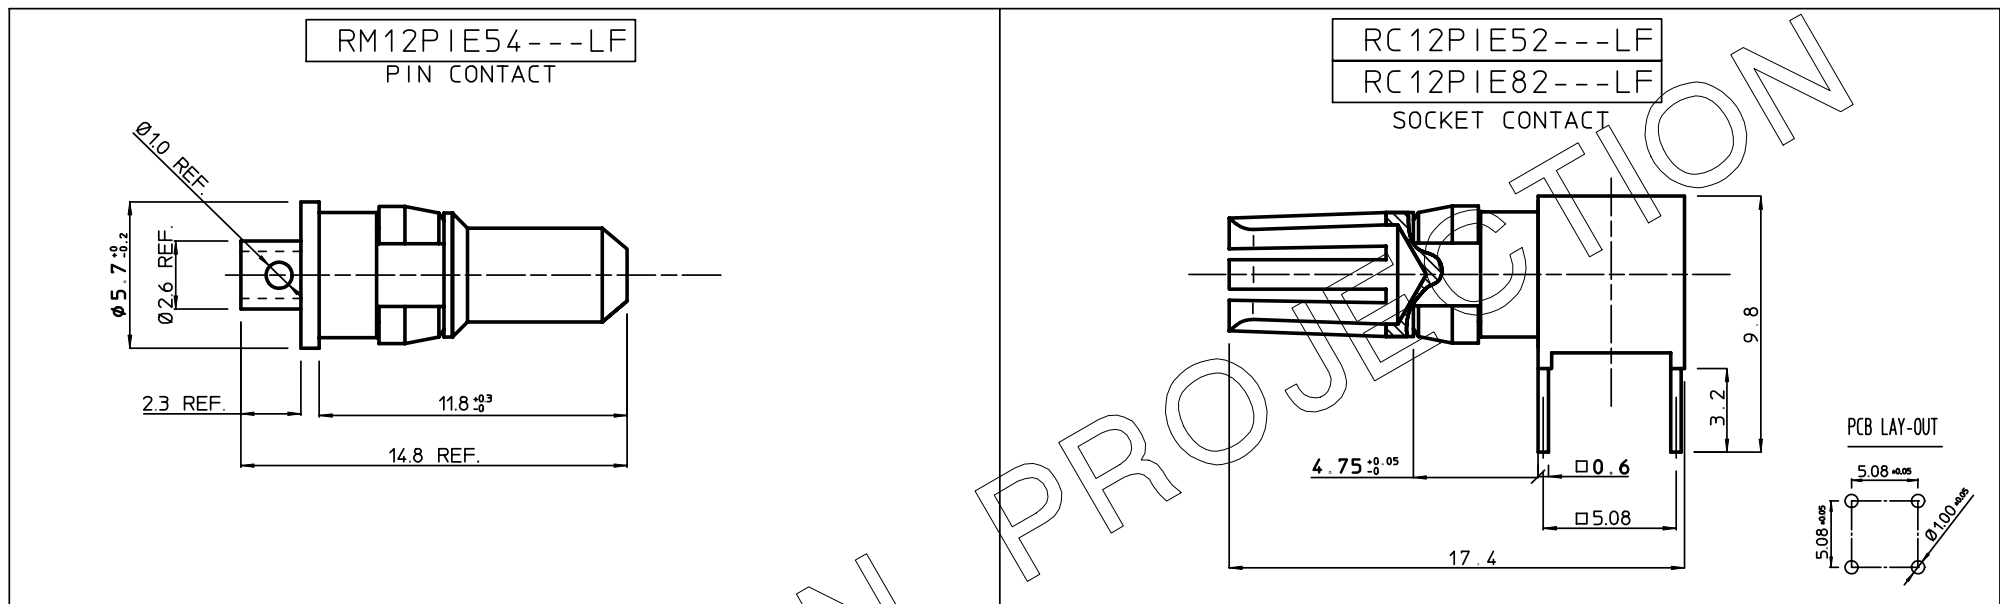

CATALOGUE NUMBER	MAX. CURRENT
RM12PIE54---LF	10 A
RC12PIE52---LF	10 A (4 SOLDERTAGS)
RC12PIE82---LF	40 A (4 SOLDERTAGS)

PERFORMANCE CHARACTERISTICS:

- INSERTION FORCE: 10 N MAX.
- WITHDRAWAL FORCE: 1.6 N MIN.
- CONTACT RESISTANCE: < 1mΩ UNDER 10 A

--- : PLATING CODE

- NOTE:
- 1) FOR MISSING INFO SEE DRAWING BS,C ,201624,028
 - 2) PLATED THROUGH HOLE INFO SEE DRAWINGS :
BS,A,201572,011 (RM12PIE54---)
BS,A,201572,012 (RC12PIE52---)
 - 3) THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

1DEC ±0.2 2DEC ±0.1 ANGLES ±1°	APPR.	DATE	SIGN.	HDR / RCP PWR CONT (DIPSOLDER)
	DRAFT	1998-10-08	W. Panis	CAT. No. R-12PIE5----LF
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.			www.fciconnect.com
	PR. ENG. MGR.			
ALL DIMENSIONS IN MM	PR. MGT. MGR.			SCALE
REFERENCES 				BS,C ,201624,003 DRAWING No. CUSTOMER DRAWING REVISION E

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE.
 DIT IS ONZE EIGENDOM EN MAG NIET NAEMAKAAT, HERDRUKT, OVERGEHAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS TERUGZENDING VERPLICHT.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[RC12PIE52DRPLF](#) [RM12PIE54ERPLF](#)