


Bandpass Filter

PBP-21.4+

50Ω Elliptic Response 19.2 to 23.6 MHz



CASE STYLE: A01

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7
CASE GROUND	2,3,4,5,6,7

Features

- low insertion loss, 1.5 dB max.
- good selectivity, 1.76 typ. 20 dB/3 dB BW ratio
- rugged shielded case, hermetically sealed

Applications


- military hi-rel systems
- high rejection applications
- image rejection
- IF signal processing

Bandpass Filter Electrical Specifications

CENTER FREQ. (MHz)	PASSBAND (MHz) I.L. 1.5 dB Max.	3dB BANDWIDTH (MHz) Typ.	STOPBANDS		VSWR (:1)	
			(I. loss > 20 dB) at MHz	(I. loss > 35 dB) at MHz	Passband Max.	Stopband Typ.
21.4	19.2-23.6	17.9-25.3	15.5 & 29	3.0 & 80-1000	1.7	16

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Outline Drawing

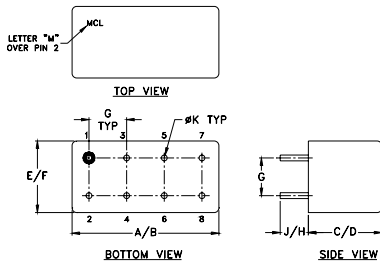


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

typical frequency response






electrical schematic

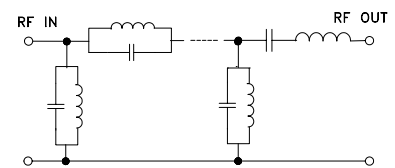

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
0.5	71.63	9.9	0.1	3.0	1.719
1.0	60.77	9.9	0.1	3.1	6.056
1.5	57.59	9.9	0.1	7.3	11.010
2.0	54.26	9.9	0.1	11.4	16.139
2.5	51.03	9.9	0.1	15.6	142.895
3.0	48.32	9.1	0.1	16.1	85.576
4.0	44.25	7.7	0.1	16.4	67.524
7.8	33.81	4.4	0.1	17.3	80.808
11.7	27.91	1.1	0.2	17.9	138.773
15.5	34.76	8.5	0.4	18.8	137.539
16.0	30.17	9.6	0.6	19.2	129.275
16.8	14.18	4.6	1.2	19.5	118.671
17.9	5.30	3.1	4.8	19.8	107.675
19.2	1.05	0.2	21.1	20.5	90.324
20.2	0.95	0.2	16.7	21.3	80.937
21.4	0.86	0.2	20.4	21.6	78.721
22.2	0.85	0.2	22.9	22.4	78.107
25.3	1.90	0.5	11.1	23.2	82.720
26.0	4.97	2.3	5.2	23.6	86.828
27.0	10.74	4.2	2.4	24.8	98.805
28.0	19.34	5.7	1.4	25.3	100.146
29.0	33.39	7.4	1.1	26.2	95.668
30.0	30.79	2.4	0.9	26.6	87.074
63.3	36.27	0.7	0.3	28.0	25.106
80.0	41.42	0.5	0.3	29.0	49.929
100.0	47.07	1.7	0.3	30.0	64.699
325.0	54.13	8.6	0.3	47.0	3.795
550.0	53.01	7.0	0.3	63.1	1.797
775.0	50.30	4.1	0.3	79.0	1.341
1000.0	47.08	3.5	0.3	80.4	1.116

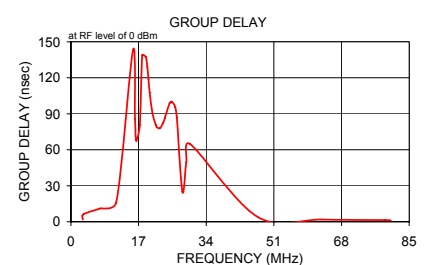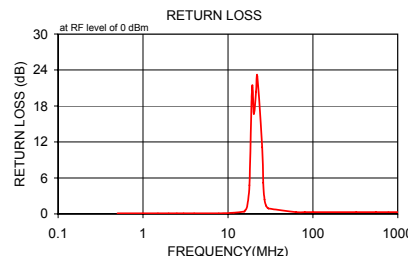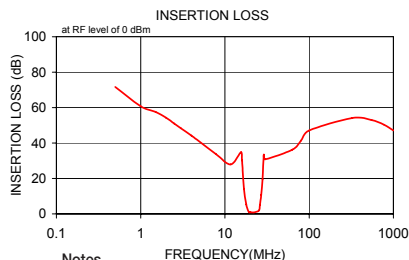

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

