

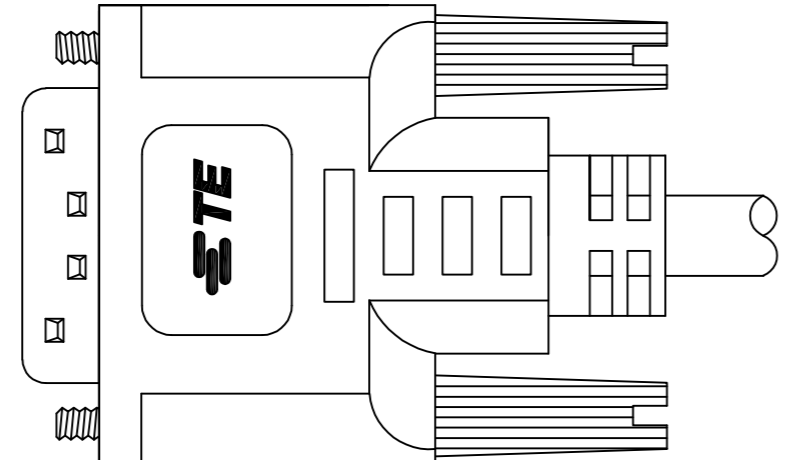


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		REVISED PER ECO-12-021512	08Dec2012	H.M	K.D

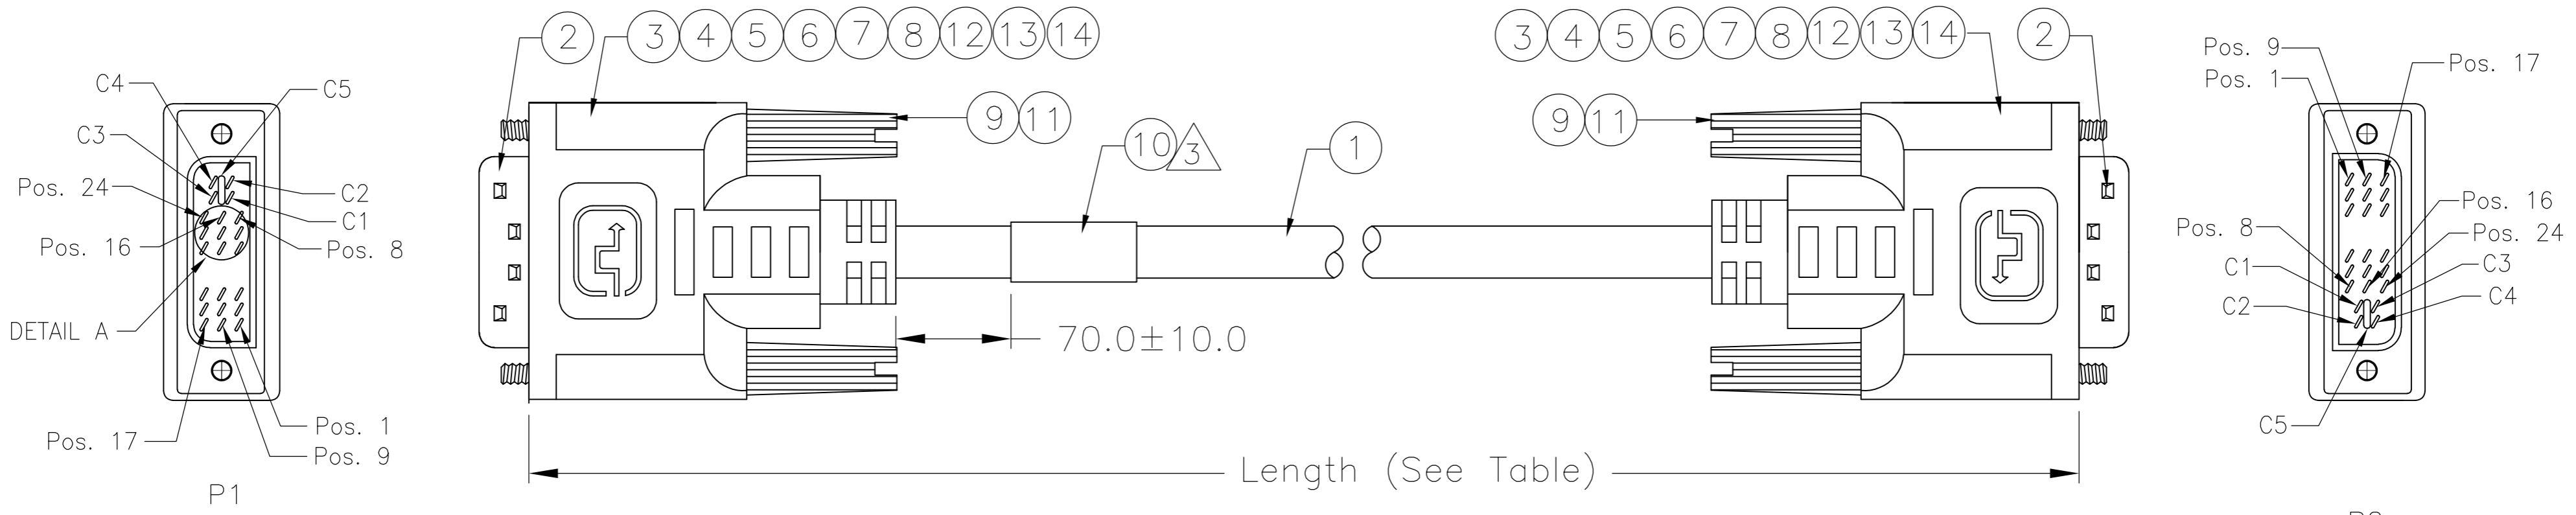

BACK SIDE

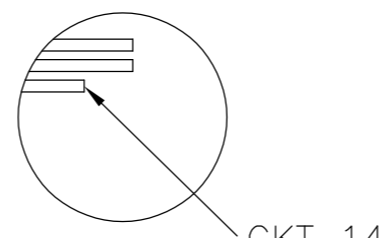


SIDE VIEW OF DETAIL A



LABEL 3

PIN ASSIGNMENT :

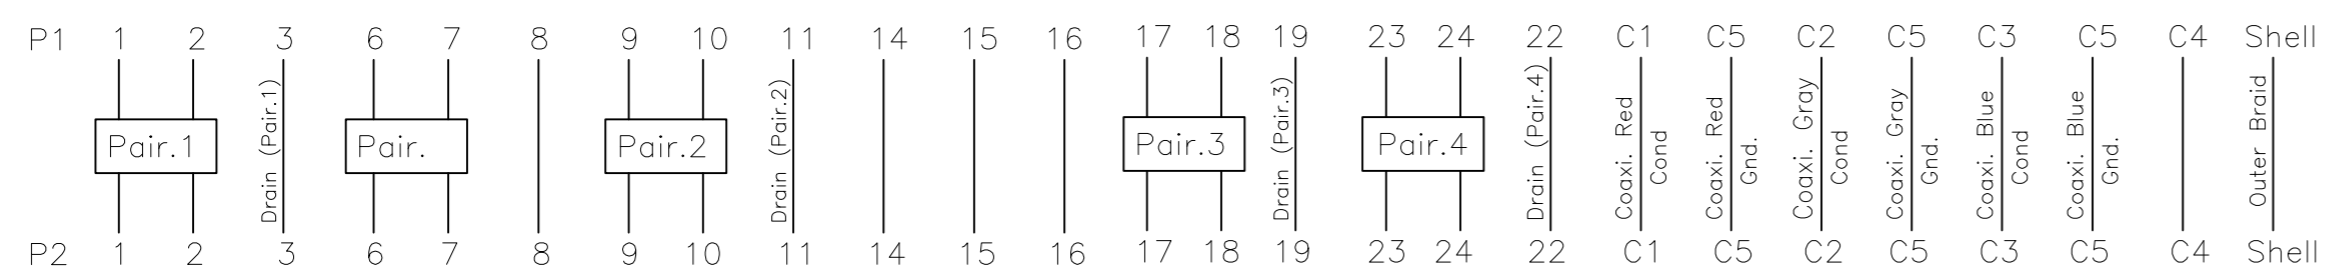

NOTES :

- CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
 - CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
 - INSULATION RESISTANCE 100M OHMS, MIN.
 - HIPOT-300 VOLTS AT 0.01 SEC.
- CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
- CABLE LABEL TO BE APPLIED AS SHOWN.
- 100% DISPLAY-SCREEN FUNCTIONAL TESTING.
- PRODUCT AND PROCESSING MUST MEET REQUIRMENTS OF TEC-138-702.

3000±80		1653929-3
2000±60		1653929-2
1000±30		1653929-1
LENGTH(L)	CUSTOMER P/N	TE P/N

QTY	UNIT	DESCRIPTION	ITEM			
14	AR	UL TAPE BLK (9mm)	14			
13	AR	Heat Shrink Tubing, OD: 1.5mm, Color: Black.	13			
12	AR	Heat Shrink Tubing, OD: 0.7mm, Color: Black.	12			
11	AR	PVC, Shore A 95±3, Color: White (WH01).	11			
10	1	Label, Size: 25.0*50.0, White: 25.0*13.0.	10			
9	4	DVI #4-40 3*45mm Thumbscrew.	9			
8	AR	Copper Foil, W:8mm.	8			
7	AR	PVC, Shore A 90±3, Color: White (WH01).	7			
6	AR	Heat Shrink Tubing, OD: 18.0mm, Color: Black.	6			
5	AR	Heat Shrink Tubing, OD: 2.5mm, Color: Black.	5			
4	AR	Heat Shrink Tubing, OD: 1.0mm, Color: Black.	4			
3	2	Metal Can For DVI Connector.	3			
2	2	DVI-I Connector, Gold 30U"Plated	2			
1	AR	UL20276 [30AWG*3Coax.+(28AWG*1P+Drain+Al/Mylar)*4+28AWG*1P+28AWG*6C]+Al/Mylar+Braid, Black(BK01)	1			
	-3	-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: JERRY LIU, 22JAN03
 CHK: MONTGOMERY, JOHN D, 15JUN04
 APVD: MONTGOMERY, JOHN D, 15JUN04

TE Connectivity
 DVI-I TO DVI-I CABLE ASSEMBLY

SCALE: A2, CAGE CODE: 00779, DRAWING NO: 1653929, SHEET: 1 OF 1, REV: J

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1653929-1](#)