

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	19MAR2015	DL	CW
	B	ECR-15-013292	24SEP2015	DL	CW
	B1	ECR-16-018198	12FEB2017	QY	CW

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 2.5 KV
POLLUTION DEGREE: 2
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)




注释:

- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 2.5 KV
污染等级: 2
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

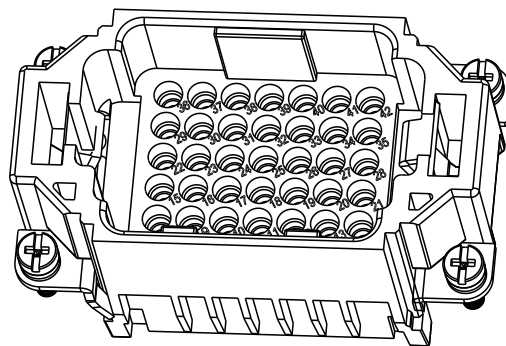
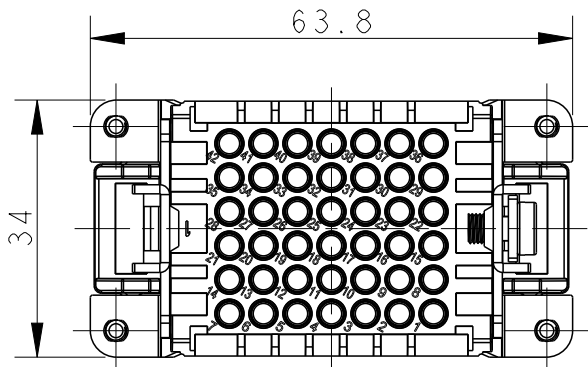


M4 THREAD RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm

TYPE-1:T2030422101-000 TE LOGO
类 型-1:T2030422101-000 TE LOGO

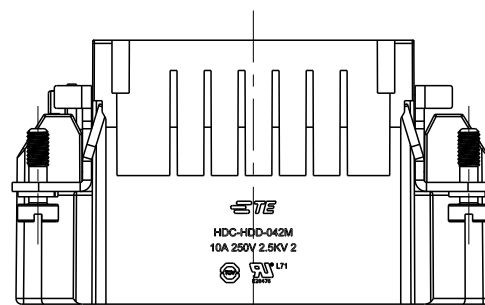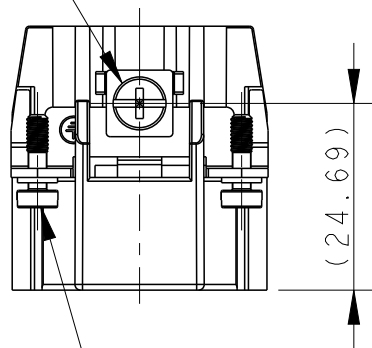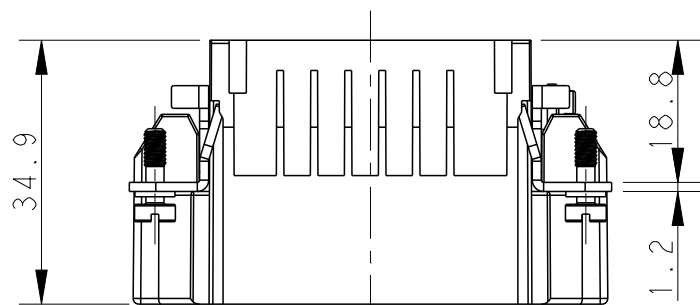

4X M3 THREAD RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

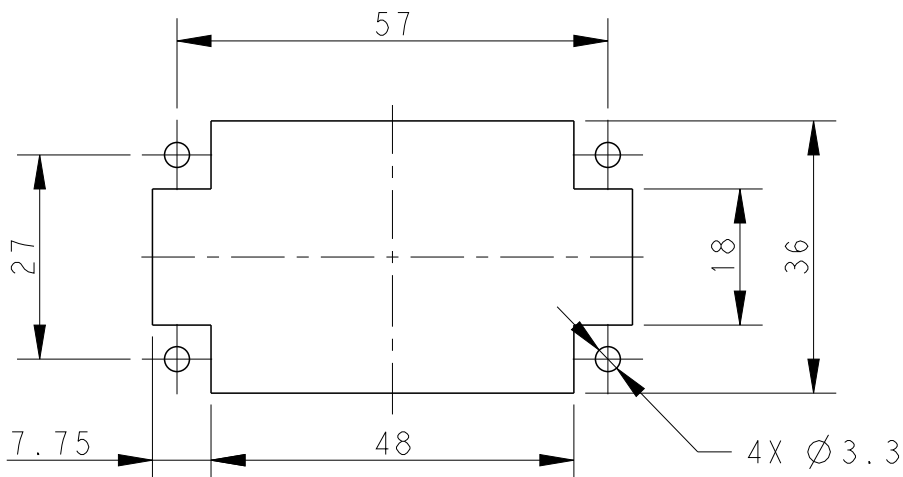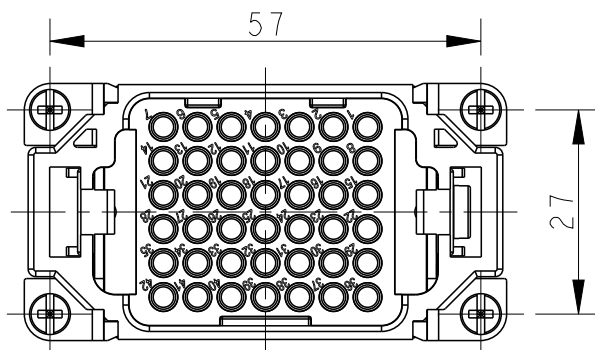


PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

不使用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 18MAR2015	 TE Connectivity		
		CHK CHRIS WANG 18MAR2015			
		APVD XU XIANG 18MAR2015	NAME HDD-042-M		
DIMENSIONS: mm		PRODUCT SPEC 108-137043	SIZE A3 CAGE CODE - DRAWING NO. C-T2030422101000 RESTRICTED TO -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137043			
MATERIAL -		WEIGHT -	SCALE 1:1 SHEET 1 OF 2 REV B1		
		CUSTOMER DRAWING			

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-




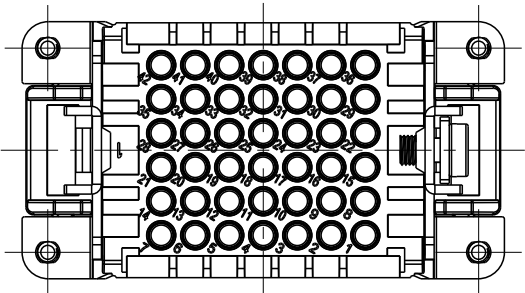


ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型1


NOTES:

SEE SHEET 1


注释:
见页 1

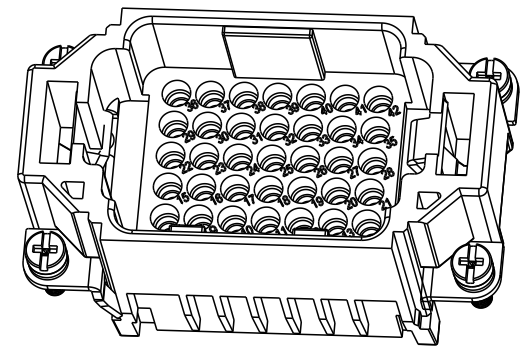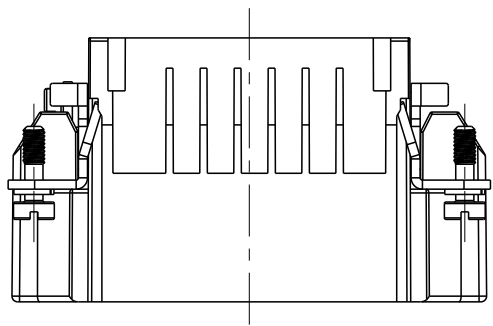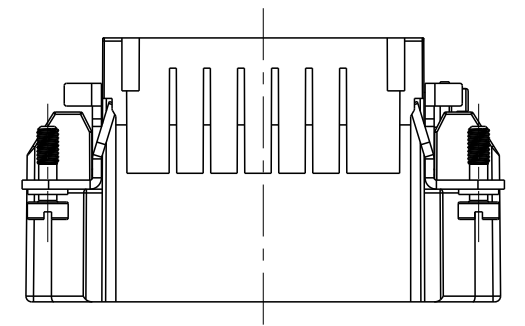

TYPE-2:T2030422101-001 STAINLESS STEEL SCREW,NO LOGO
类 型-2:T2030422101-001 不锈钢螺丝,无LOGO

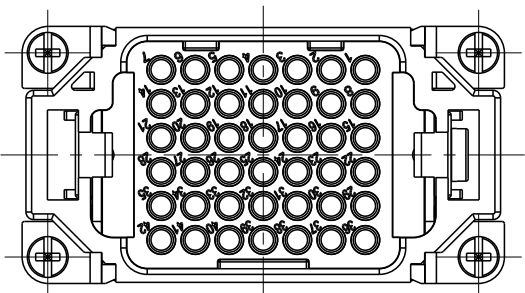

T2030422101-001	HDD-042-M	HDD-042 MALE INSERT, STAINLESS STEEL SCREW,NO LOGO HDD-042公插,不锈钢螺丝,无LOGO	TYPE-2 类 型-2
T2030422101-000	HDD-042-M	HDD-042 MALE INSERT HDD-042公插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI	18MAR2015	 TE Connectivity						
		CHK CHRIS WANG	18MAR2015							
DIMENSIONS: mm		APVD XU XIANG	18MAR2015	NAME HDD-042-M						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		0 PLC ±-		108-137043		A3		-	Ⓒ-T2030422101000	-
		1 PLC ±-		APPLICATION SPEC						
		2 PLC ±-		114-137043						
3 PLC ±-										
4 PLC ±-										
ANGLES ±-										
MATERIAL -		FINISH -		WEIGHT -						
-		-								
				CUSTOMER DRAWING		SCALE 1:1		SHEET 2 OF 2		REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HDD-042-M](#)