


## SOT-23

## SOT-23 贴片塑封三极管 SOT-23 Plastic-Encapsulate Transistors

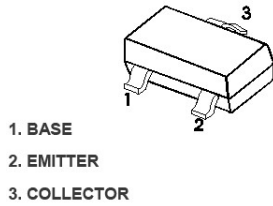

Marking: 2F

### 特征 Features

- 与 MMBT2222A 配对; Complementary to MMBT2222A
- 最大功率耗散 250mW; Power Dissipation of 250mW
- 高稳定性和可靠性。High Stability and High Reliability

### 机械数据 Mechanical Data

- 封装: SOT-23 封装 SOT-23 Small Outline Plastic Package
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

**Maximum Ratings & Thermal Characteristics** (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
Collector-Base Voltage	V <sub>CB0</sub>	-60	V
Collector-Emitter Voltage	V <sub>CEO</sub>	-60	V
Emitter -Base Voltage	V <sub>EBO</sub>	-5	V
Collector Current-Continuous	I <sub>c</sub>	-600	mA
Collector Power Dissipation	P <sub>c</sub>	250	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55-+150	°C
Thermal resistance From junction to ambient	R <sub>θJA</sub>	500	°C/W

电特性 (TA = 25°C 除非另有规定)

**Electrical Characteristics** (Ratings at 25°C ambient temperature unless otherwise specified).







参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
Collector-base breakdown voltage	V(BR)CBO	IC=-100uA, IE=0	-60		V
Collector-emitter breakdown voltage	V(BR)CEO *	IC=-1mA, IB=0	-60		V
Emitter-base breakdown voltage	V(BR)EBO	IE=-10uA, IC=0	-5		V
Collector cut-off current	ICBO	V <sub>CB</sub> =-50V, I <sub>E</sub> =0		-20	nA
Emitter cut-off current	IEBO	V <sub>EB</sub> =-3V, I <sub>C</sub> =0		-10	nA
Collector cut-off current	ICEX	V <sub>CE</sub> =-30V, V <sub>BE(off)</sub> =-0.5V		-50	nA
DC current gain	hFE(1) *	V <sub>CE</sub> =-10V, I <sub>C</sub> =-150mA	100	300	
	hFE(2) *	V <sub>CE</sub> =-10V, I <sub>C</sub> =-0.1mA	75		
	hFE(3) *	V <sub>CE</sub> =-10V, I <sub>C</sub> =-1mA	100		
	hFE(4) *	V <sub>CE</sub> =-10V, I <sub>C</sub> =-10mA	100		
	hFE(5) *	V <sub>CE</sub> =-10V, I <sub>C</sub> =-500mA	50		
Collector-emitter saturation voltage	V <sub>CE(sat)1</sub> *	I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA		-0.4	V
	V <sub>CE(sat)2</sub> *	I <sub>C</sub> =-500mA, I <sub>B</sub> =-50mA		-1.6	V
Base -emitter saturation voltage	V <sub>BE(sat)1</sub> *	I <sub>C</sub> =-150mA, I <sub>B</sub> =-15mA		-1.30	V
	V <sub>BE(sat)2</sub> *	I <sub>C</sub> =-500mA, I <sub>B</sub> =-50mA		-2.60	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =-20V, I <sub>C</sub> =-50mA, f=100MHz	200		MHz
Delay time	t <sub>d</sub>	V <sub>CE</sub> =-30V, I <sub>C</sub> =-150mA, I <sub>B1</sub> =-15mA		10	nS
Rise time	t <sub>r</sub>			25	nS
Storage time	t <sub>s</sub>			225	nS
Fall time	t <sub>f</sub>	V <sub>CE</sub> =-6V, I <sub>C</sub> =-150mA, I <sub>B1</sub> =I <sub>B2</sub> =-15mA		60	nS

\*Pulse test: pulse width ≤ 300us, duty cycle ≤ 2.0%


### CLASSIFICATION OF hFE(1)

HFE	100-300	
RANK	L	H
RANGE	100-200	200-300


Typical characteristics

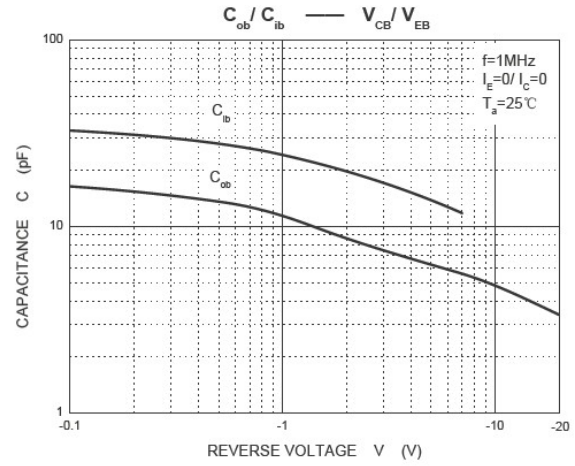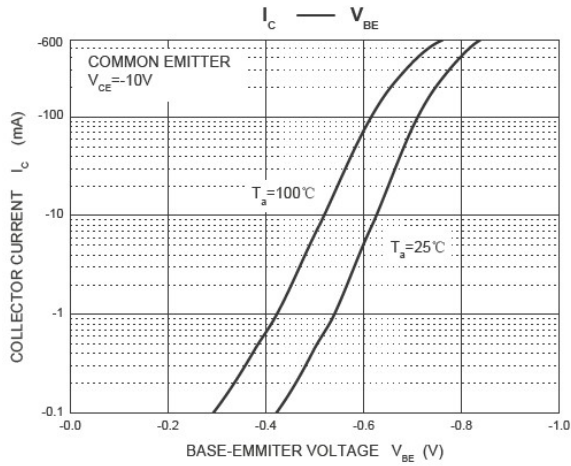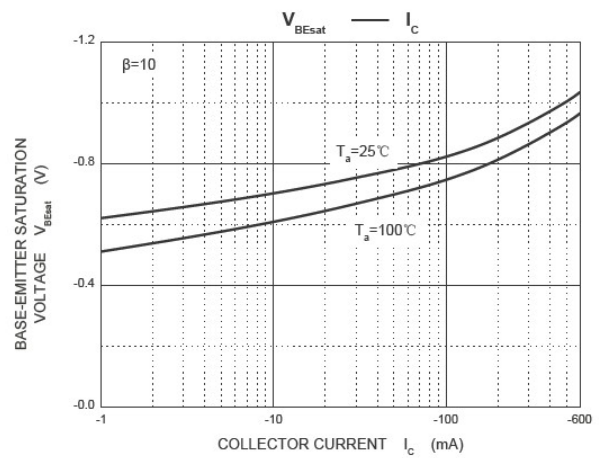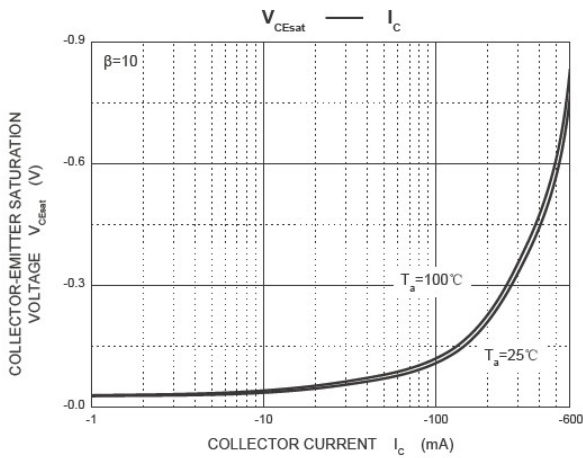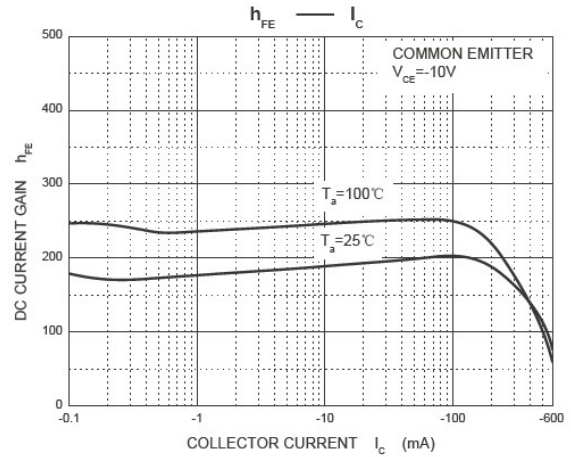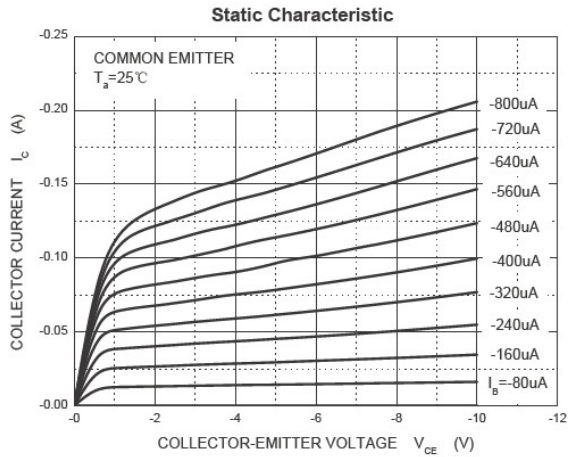

# MMBT2907A

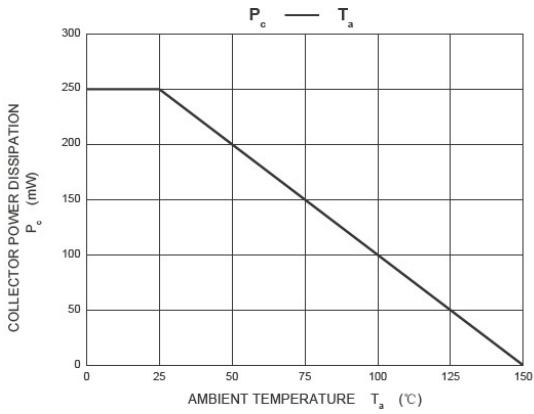

## SOT-23 PACKAGE OUTLINE Plastic surface mounted package

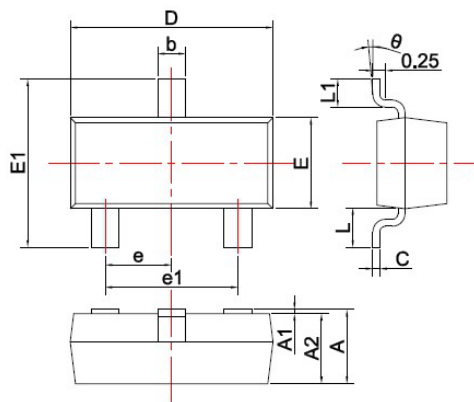


SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

### 焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs



- Note:
1. Controlling dimension; in millimeters.
  2. General tolerance:  $\pm 0.05$ mm.
  3. The pad layout is for reference purposes only.

### Contact Information

Jiangxi Salltech Microelectronics Co.,Ltd

No.699 Huangtang East Street,Ganjiang New District,Nanchang city,jiangxi province.

TEL:021-58131219

FXA:021-58131183

WWW.SALLTECH.COM