
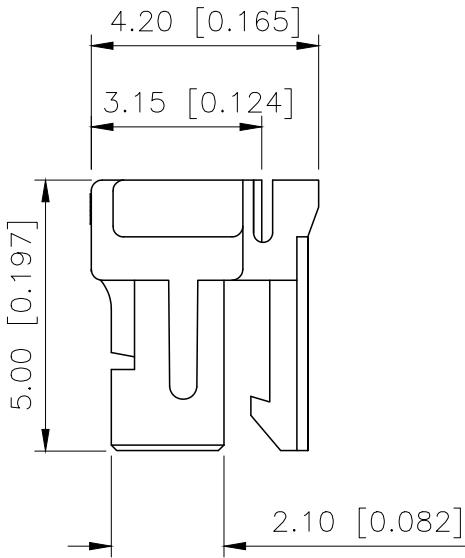
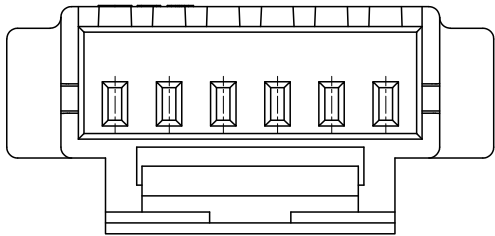
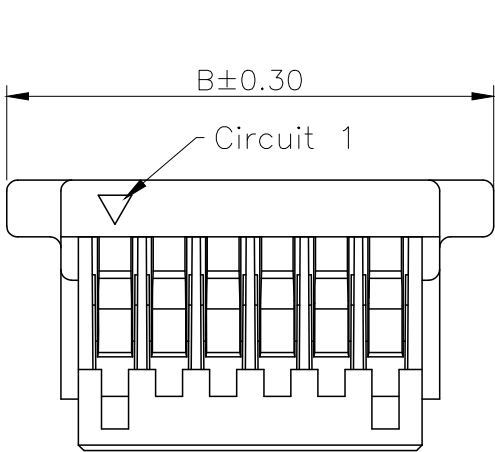


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.09.02	阿树

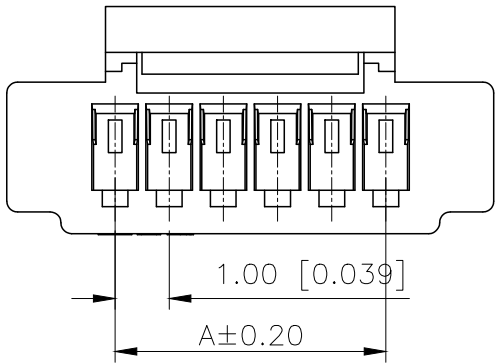

- SPECIFICATIONS
- Voltage rating:50V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤40mΩ

PART NO.:

X1002 H-XX L-N0 HF
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~20Pin
④Plug the Pin & Special No:L-With Lock
⑤Material:N0-PA66 94V-0
⑥HF-Halogen Free

Poles	Dimensions/mm		Poles	Dimensions/mm	
	A	B		A	B
02	1.00	5.00	12	11.00	15.00
03	2.00	6.00	13	12.00	16.00
04	3.00	7.00	14	13.00	17.00
05	4.00	8.00	15	14.00	18.00
06	5.00	9.00	16	15.00	19.00
07	6.00	10.00	17	16.00	20.00
08	7.00	11.00	18	17.00	21.00
09	8.00	12.00	19	18.00	22.00
10	9.00	13.00	20	19.00	23.00
11	10.00	14.00			

X1002H-XXL-N0HF	PA66 UL 94V-0 Halogen Free	X1002T	X1002W-L
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 1.0mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1002H-XXL-N0HF
APPROVED		SIZE: A4	DWG NO.: