
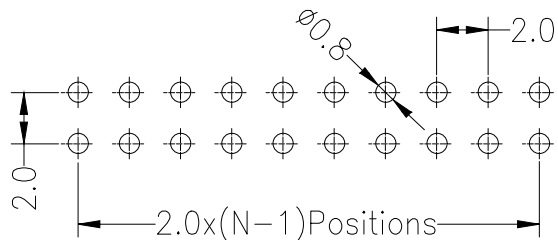
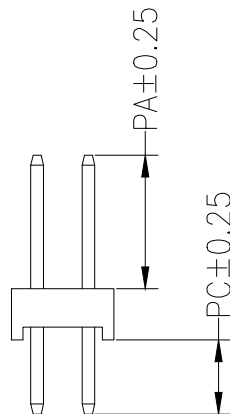


2.0±0.1  
4.0±0.15

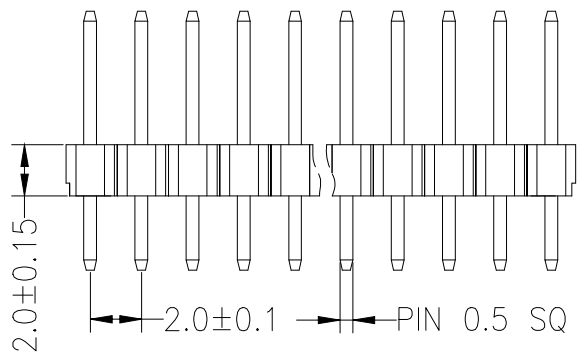

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

**SPECIFICATIONS**

Rated Current:1.5AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 5 seconds)

Dimension antitheses list		
ITEM	PA	PC
Standard	4.00	2.80
Alternate		

**Ordering Information**

PZ 200 - \* - N - \* - \* - \*\*

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2=40Pin	Type Z=直针 W=弯针 S=立轴 W=弯轴	Length (产品壁厚)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	--------------------------------------	------------------	--

		GENREL TOLERANCE		制图	<b>深圳市华灿天禄电子有限公司</b> ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM	TOL	DRAWING				
		X. X	±0.30	审核	产品名称	2.00双排 直排针(塑高2.0)	版本	A
		X. XX	±0.20	检查	TITLE		REV.	
		X. XXX	±0.10	批准	PART NO.	PZ200-2-N-Z-2.0-XX	单位	mm
		Angle	±3.0°	投影	MATERIAL		页次	1/1
序号	变更内容	日期						
No.	MODIFY CONTENT	MODIFY DATE						