

SPECIFICATIONS

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Wire Range(线径):16~28AWG  
 Strip length(剥线长度):8~9mm  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s



Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)

PITCH RANGE	NOMINAL DIMENSION RANGE										
	IN MM		IN MM		IN MM						
TO 6	OVER 6	TO 10	OVER 10	TO 30	OVER 30	TO 60	OVER 60	TO 100	OVER 100	TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.30	±0.50	±0.50	±0.70	±0.70	±1.00	±1.00

# Ordering Information

**JL15EDGKD - 381 XX G X 1**

Pitch 381=3.81PH  
 No.of pins 2P,3P,4P~24P  
 Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey  
 Packing  
 O=Pe bog  
 T=Tube  
 A=Troy

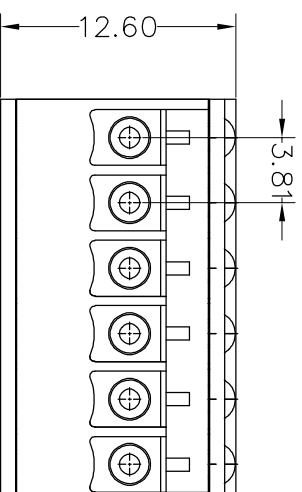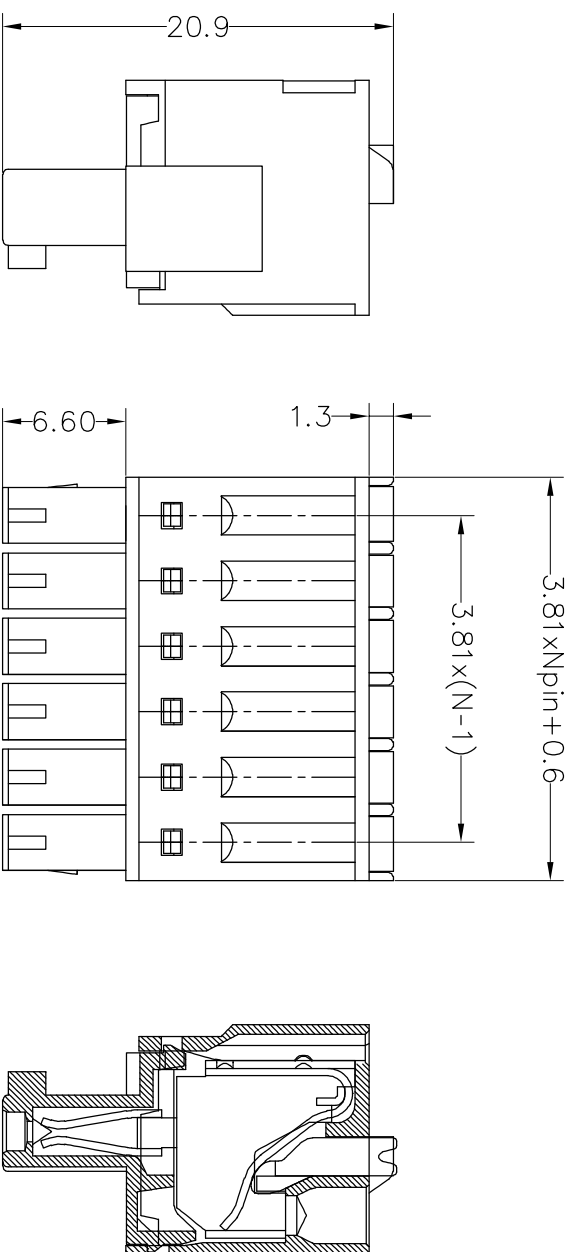

**JIN** 东莞市锦凌电子有限公司  
 DONGGUAN JINLING ELECTRONIC CO.,LTD

PART NO. JL15EDGKD-381XXGX1  
 TITLE: 3.81 Pitch Female Pluggable Terminal Blocks

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PROJ.
A0	2020.05.22	NEW DRAWING		X.XX ±0.20 X.XXX ±0.10 Angle ±3°	CHECK	A4	1/1	
1				DIM TOL	APPROVE			