
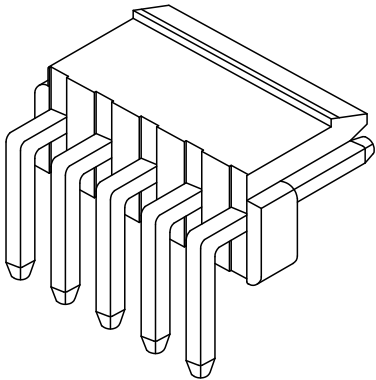





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.21	阿树

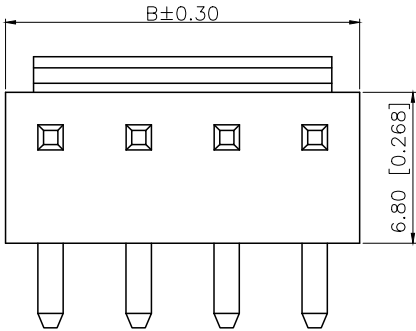

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing: ≤20mΩ

X9396 W R-XX A-N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Rangle:V-Stright 180°
- 4.Row No.Pin No:XX-02~15 Pin
- 5.Special No:A-There are graps
- 6.Material:N0-PA66 UL94V-0
- 7.Plating:SN-Bright tin plating

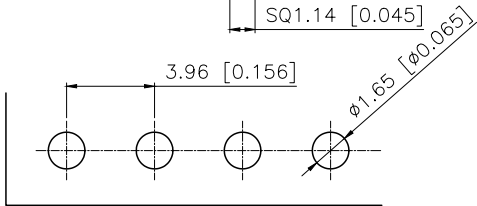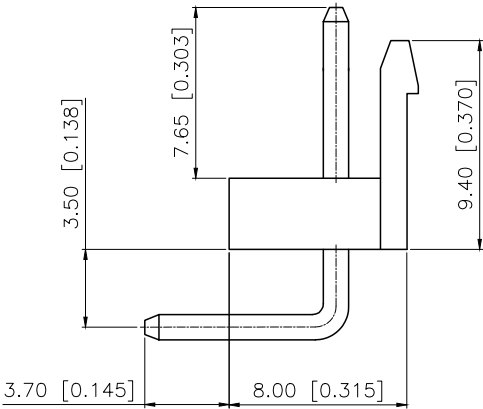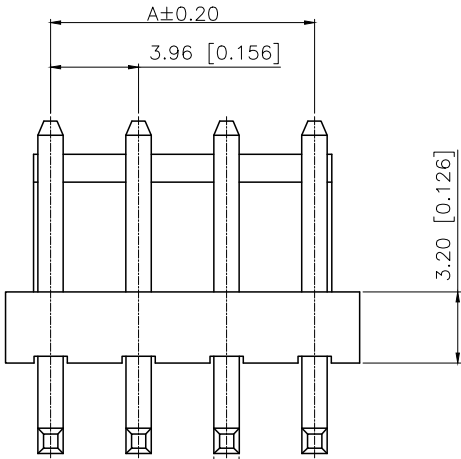

Recommended P.C.BLayout
General Tolerance±0.05

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	3.96	7.92	09	31.68	35.64
03	7.92	11.88	10	35.64	39.60
04	11.88	15.84	11	39.60	43.56
05	15.84	19.80	12	43.56	47.52
06	19.80	23.76	13	47.52	51.48
07	23.76	27.72	14	51.48	55.44
08	27.72	31.68	15	55.44	59.40

X9396WR-XXA-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9396H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.96mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9396WR-XXA-N0SN
APPROVED		SIZE: A4	DWG NO.: