
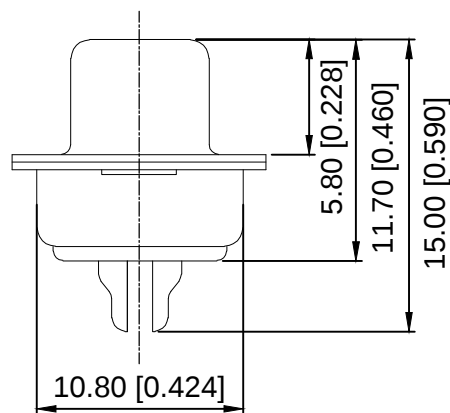
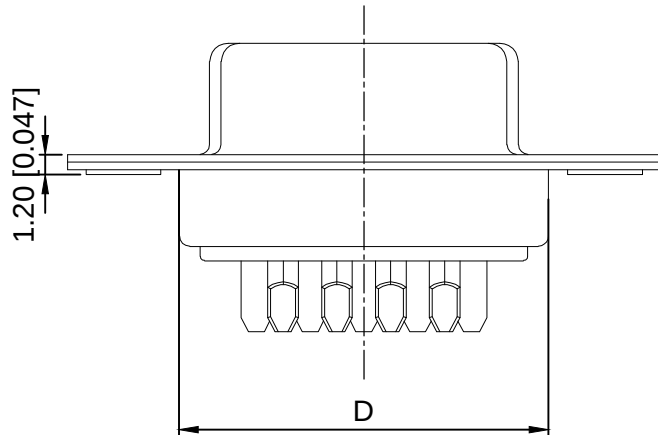


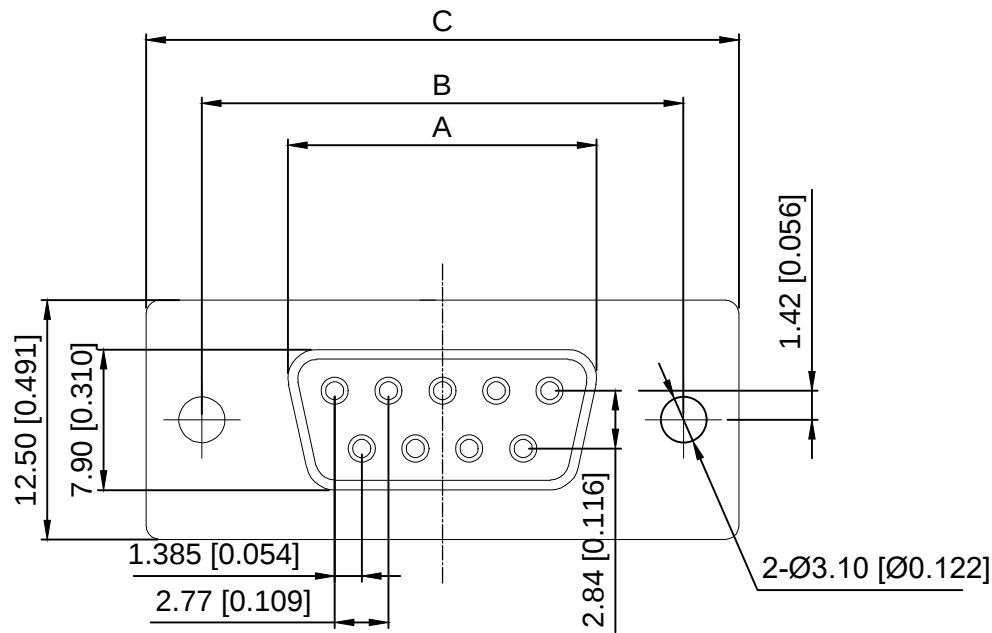

#### Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:5A AC/DC

额定电流: 5A AC/DC

3.Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

4.Temperature range: -55℃~+105℃

温度范围: -55℃~+105℃

5.Insulation resistance:500MΩ MIN

绝缘电阻:500MΩ MIN

6.Contact resistance:30mΩ Max

接触电阻: 30mΩ Max

Material:

材料:

7.Rubber core:PBT+G/F UL94V-0

胶芯: PBT+C/F UL94V-0

8.The iron shell:Steel ; Tin Plating

铁壳: 钢 ; 镀锡

9.Terminal:Brass

端子: 黄铜

X01 XX F X X X X L  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series NO.

② Row No.Pin No.XX-09;15;25;37

③ Welding Board Angle :F-Female

④ T: Tradutional C: Car-pin

⑤ Planting Category: 1:Gold 1u ;2:Gold 2u; 3:Gold 3u ;4:Gold 5u; 5:Gold 15u;

6:Gold 30u ;7:Terminal half- Gold Bright Tin;8:Terminal half- Gold 2u Bright Tin

9:Terminal half- Gold 3u Bright Tin;10:Terminal half- Gold 5u Bright Tin

11:Terminal half- Gold 15u Bright Tin;12:Terminal half- Gold 30u Bright Tin

13:Terminal half- Gold Matte Tin;14:Terminal half- Gold 2u Matte Tin


15:Terminal half- Gold 3u Matte Tin;16:Terminal half- Gold 5u Matte Tin

17:Terminal half- Gold 15u Matte Tin;18:Terminal half- Gold 30u Matte

⑥ TinColor:B-BLACK W-White BL-Blue

⑦ 1:TYPE-1; 5:TYPE-5

⑧ L: Stitching lengthening



| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 16.35     | 24.99  | 30.80  | 19.28  |
| 15                  | 24.75     | 33.32  | 39.20  | 27.51  |
| 25                  | 38.35     | 47.04  | 53.05  | 41.28  |
| 37                  | 54.75     | 63.50  | 69.40  | 57.71  |

|                                                     |             |      |         |          |          |      |                        |      |            |                                      |                           |          |
|-----------------------------------------------------|-------------|------|---------|----------|----------|------|------------------------|------|------------|--------------------------------------|---------------------------|----------|
|                                                     |             |      |         |          |          |      | DSND                   |      | SCALE: N/A | MODEL TYPE:<br>D-SUB                 |                           |          |
| Δx                                                  |             |      |         |          | ANGLAR   | ±5°  |                        | DWN  |            | VIEW:                                | PART NO.:<br>X01XXFXXXXL  |          |
| Δx                                                  |             |      |         |          | L≤ 4     | ±0.2 |                        | CHKD |            | UNIT: mm/in                          | DWG NO.:<br>X-X01XXFXXXXL |          |
| Δx                                                  |             |      |         |          | 4<L≤ 16  | ±0.3 |                        | APPD |            | SIZE: A4                             |                           |          |
| Δx                                                  |             |      |         |          | 16<L≤ 63 | ±0.4 |                        |      |            |                                      |                           |          |
| MARK                                                | DESCRIPTION | DATE | REVISED | APPROVED | L> 63    | ±0.5 |                        |      |            |                                      |                           |          |
| REVISIONS                                           |             |      |         |          |          |      | UNSPECIFIED TOLERANCES |      |            | XKB INDUSTRIAL PRECISION CO.,LIMITED |                           |          |
| www.helloxkb.com    www.helloxkb.cn    www.xk-dg.cn |             |      |         |          |          |      |                        |      |            | WEIGHT                               | SHEET                     | REVISION |
|                                                     |             |      |         |          |          |      |                        |      |            |                                      | 1/1                       | A0       |