
770680-4 - ACTIVE

AMP | AMPSEAL

TE Internal #: 770680-4 Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMPSEAL Receptacle Housings

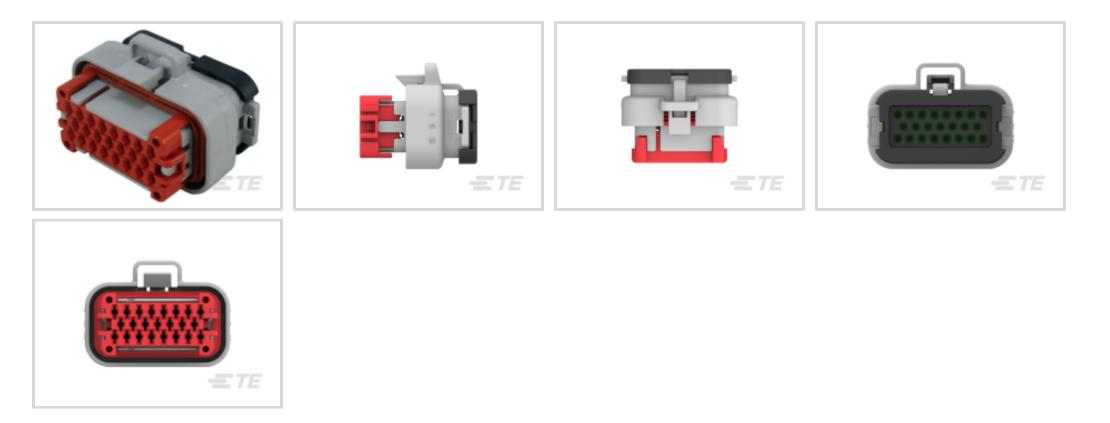

Connector System: Wire-to-Board

Number of Positions: 23

Connector & Housing Type: Plug

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

All AMPSEAL Receptacle Housings (31)



Features

Product Type Features

Mixed & Hybrid Connector	No		
Connector Shape	Rectangular		
Connector System	Wire-to-Board		
Connector & Housing Type	Plug		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	Integrated in Housing		
Configuration Features			
Number of Positions	23		
Number of Rows	3		
Electrical Characteristics			
Operating Voltage	250 VAC		

Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL



Nominal Voltage Architecture	250 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	С
Contact Features	
Contact Size	1.3mm
Contact Type	Socket
Mating Pin Diameter	1.3 mm[.051 in]
Contact Current Rating (Max)	17 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	34.6 mm[1.362 in]
Product Width	33.6 mm[1.323 in]
Product Length	47.4 mm[1.866 in]
Row-to-Row Spacing	4 mm[.157 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94V-0

Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL



Packaging Features

Packaging Quantity	28
Packaging Method	Tray
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

in Component Part)
Decamethylcyclopentasiloxane (D5) (.5% in
Component Part)
Article Safe Usage Statements:
Wash thoroughly after handling. Recycle if possible and dispose of the article by
following all applicable governmental regulations relevant to your geographic
location.Not Low Halogen - contains Br or Cl > 900
ppm.Not applicable for solder process capability

Halogen Content


Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL



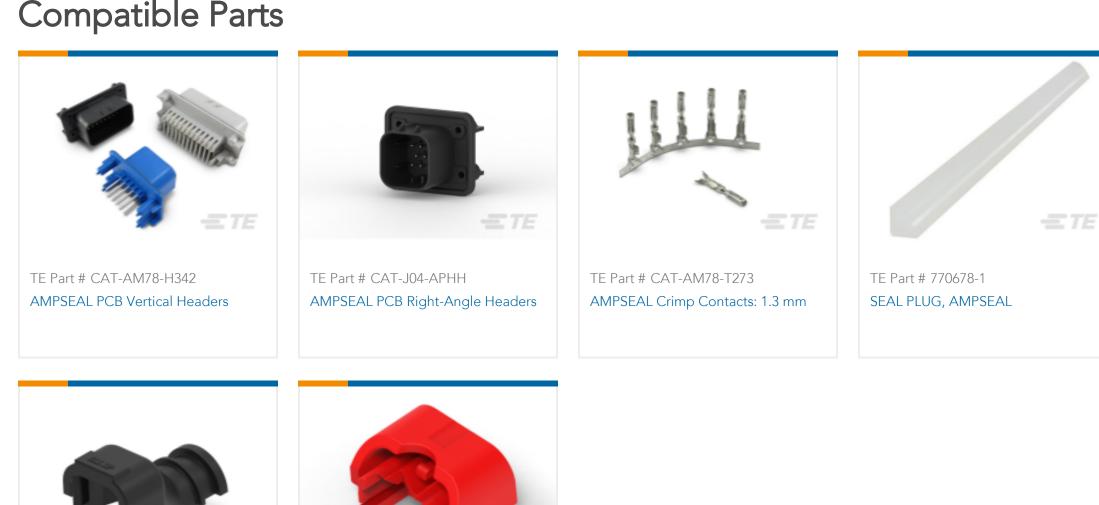

Compatible Parts




Also in the Series AMPSEAL

E TE


TE Part # 2389806-1

AMPSEAL

STRAIN RELIEF,23 POSITION

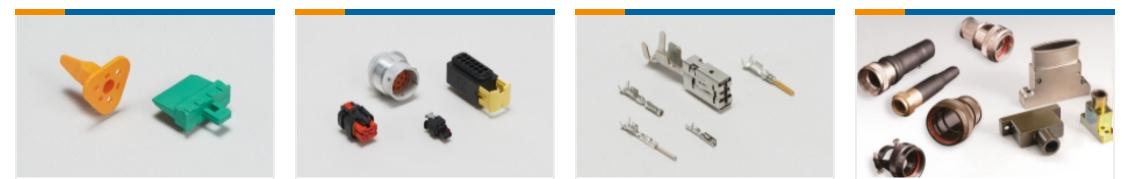


	Automotive Connector Locks & Position Assurance(1)	Automotive Housings(31)	Automotive Terminals(8)	Connector Backshells(4)
--	---	-------------------------	-------------------------	-------------------------

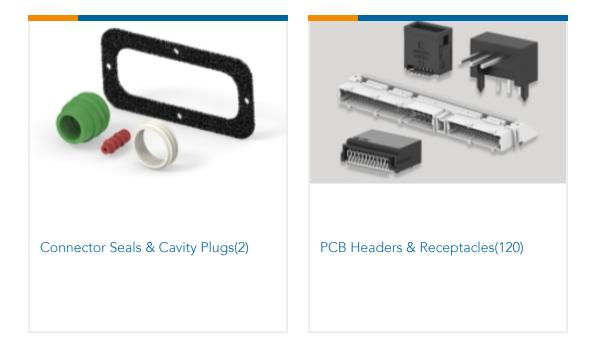


Customers Also Bought

Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL



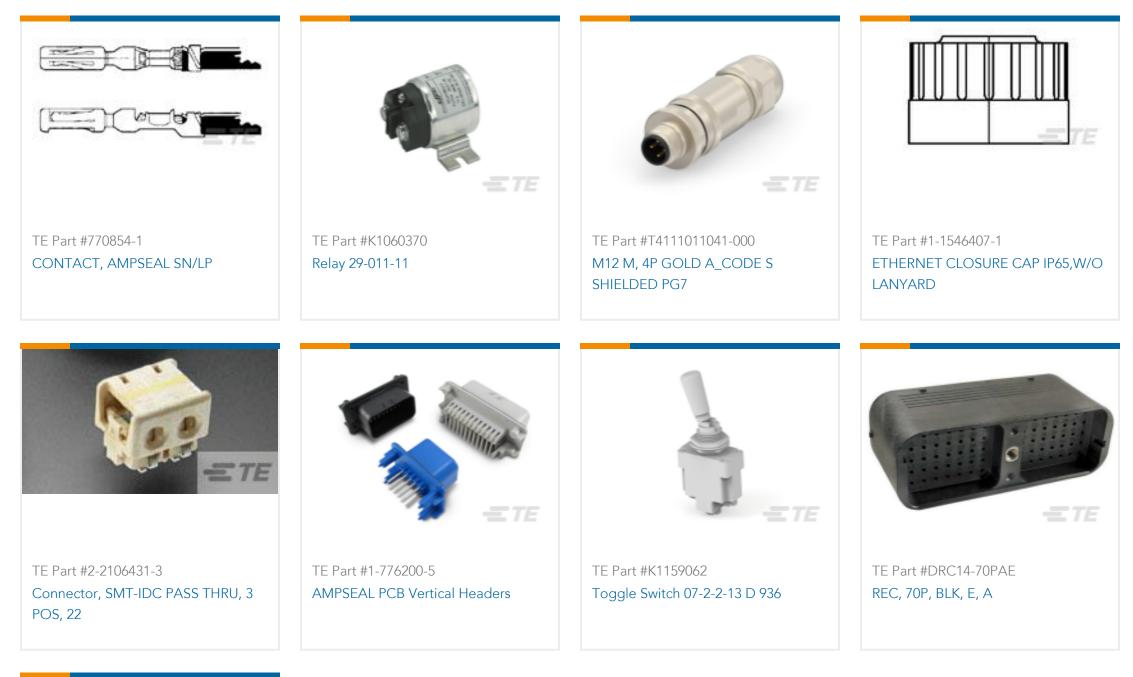



TE Part #3-1437144-3 FSN-23A-15=NOMEX FS STD

Documents

Product Drawings 23POS,AMPSEAL,SOC HSG ASSY,SLD,COD 4

English

CAD Files

Customer View Model ENG_CVM_CVM_770680-4_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_770680-4_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_770680-4_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

Plug, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Sealable, Gray, Wire & Cable, Power, Cable Mount (Free-Hanging), AMPSEAL



AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Engineering Report

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English