

FAN4050

Precision Micropower Shunt Voltage Reference

Features

- Fixed 2.500V and 3.300V
- Tolerances to $\pm 0.1\%$ (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small package: SOT-23
- Extended operating current range

Applications


- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

Description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in two output voltages (2.500V and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SOT-23 package.

Connection Diagram

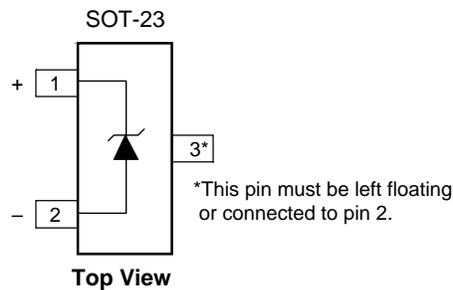

Absolute Maximum Ratings¹

Ratings are over full operating free-air temperature range unless otherwise noted.

Parameter	Min.	Max.	Unit
Continuous cathode current, I_K	-30	+30	mA
Power dissipation ²		280	mW
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C


Notes:

- Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.
- It is recommended to connect pin 3 to pin 2 in the SSOT23 package to ensure optimal thermal performance.

Recommended Operating Conditions

Parameter	Min.	Max.	Unit
Continuous cathode current, I_K	0.07	15	mA
Operating temperature range in free air, T_A	-40	85	°C

Equivalent Schematic

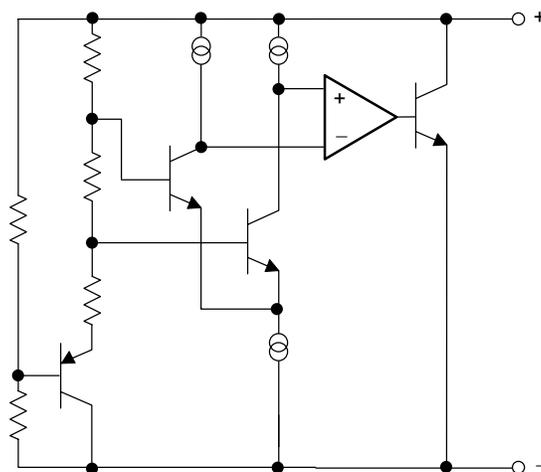

Guaranteed Electrical Characteristics, FAN4050-2.5

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits			Units
			A	B	C	
V _R	Reverse Breakdown Voltage	I _K = 100µA	2.500	2.500	2.500	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100µA	±2.5 • ±11	±5.0 ±14	±13 ±21	mV mV
I _{RMIN}	Minimum Operating Current		• 65	65	65	µA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 100µA	• ±50	±50	±50	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA	• 1.2	1.2	1.2	mV
		1mA ≤ I _K ≤ 15mA	• 8.0	8.0	8.0	mV
		1mA ≤ I _K ≤ 25mA	10	10	10	mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	0.3	0.3	0.3	Ω*
e _N	Wideband Noise	I _K =100µA, 10Hz ≤ f ≤ 10kHz	35	35	35	µV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100µA	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4050-3.3

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits			Units
			A	B	C	
V _R	Reverse Breakdown Voltage	I _K = 100µA	3.300	3.300	3.300	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100µA	±3.3 • ±25	±6.6 ±28	±17 ±38	mV mV
I _{RMIN}	Minimum Operating Current		• 70	70	70	µA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 100µA	• ±50	±50	±50	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA	• 1.2	1.2	1.2	mV
		1mA ≤ I _K ≤ 15mA	• 10	10	10	mV
		1mA ≤ I _K ≤ 25mA	12	12	12	mV
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	0.5	0.5	0.5	Ω*
e _N	Wideband Noise	I _K =100µA, 10Hz ≤ f ≤ 10kHz	70	70	70	µV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100µA	120	120	120	ppm*

*Typical.


Mechanical Dimensions

SOT-23 Package

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	.035	.044	.89	1.12	
A1	.0004	.004	.01	.10	
B	.012	.020	.30	.50	
c	.003	.008	.08	.20	
D	.110	.120	2.80	3.04	
E	.047	.055	1.20	1.40	
e	.037 BSC		.95 BSC		
e1	.075 BSC		1.90 BSC		
H	.083	.104	2.10	2.64	
L	.021 REF		.54 REF		
S	.016 Nom		.395 Nom		

Notes:


1. Dimensions are inclusive of plating.
2. Dimensions are exclusive of mold flash & metal burr.
3. Comply to JEDEC TO-236.
4. This drawing is for matrix leadframe only.

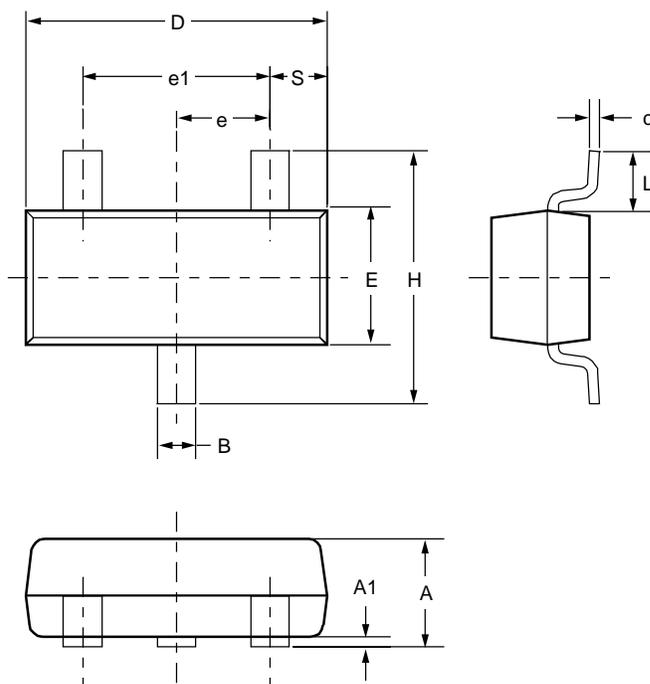

Ordering Information

Example: FAN4050AIS3-2.5


FAN4050

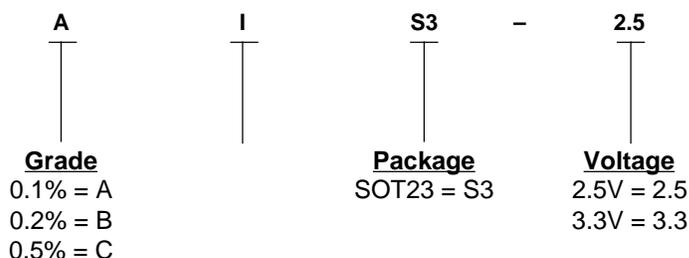

SSOT-23 Package Marking Information

Only 3 fields of marking are possible on an SSOT-23. This table gives the meaning of these fields.

Example: FCA

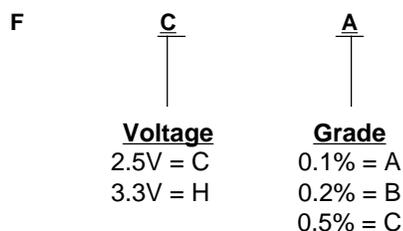

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050BIx33

3.3V, 0.2% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050BIS333X	Full Production	\$0.94	SOT-23	3	FHB	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050AIx33

3.3V, 0.1% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050AIS333X	Full Production	\$1.40	SOT-23	3	FHA	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050BIx25

2.5V, 0.2% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

[Related Links](#)

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050BIS325X	Full Production	\$0.94	SOT-23	3	FCB	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

[© Copyright 2002 Fairchild Semiconductor](#)

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050AIx25

2.5V, 0.1% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

[Related Links](#)

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050AIS325X	Full Production	\$1.40	SOT-23	3	FCA	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© [Copyright 2002 Fairchild Semiconductor](#)

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050CIx25

2.5V, 0.5% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050CIS325X	Full Production	\$0.67	SOT-23	3	FCC	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

[find products](#)

[Home >> Find products >>](#)

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FAN4050CIx33

3.3V, 0.5% Tolerance Precision Micropower
Shunt Voltage Reference

Contents

[General description](#) | [Features](#) | [Applications](#) |

[Product status/pricing/packaging](#)

Datasheet

[Download this](#)

[datasheet](#)

[PDF](#)

[e-mail this datasheet](#)

[\[E-](#)

This page [Print version](#)

[Related Links](#)

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

General description

The FAN4050 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in a variety of fixed output voltages (2.500V, and 3.300V) and with a variety of output voltage tolerances (0.1%, 0.2%, and 0.5%). They also have excellent temperature coefficients, 50ppm/°C.

The FAN4050 series is available in the SSOT-23 package.

[back to top](#)

Features

- Fixed 2.500V, and 3.300V
- Tolerances to ±0.1% (25°C)
- Low output noise
- Low temperature coefficient, 50ppm/°C max
- Small packages: SSOT-23
- Extended operating current range

[back to top](#)

Applications

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
FAN4050CIS333X	Full Production	\$0.67	SOT-23	3	FHC	TAPE REEL

* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor
