

4-530153-1 ✓ ACTIVE

AMP | AMP M Series

TE Internal #: 4-530153-1

Tandem Spring, Open Top, 2 Position, 2.54 mm [.1 in] Centerline, Signal, -40 – 85 °C [-40 – 185 °F], AMP M Series, Board-to-Board Jumpers & Shunts

[View on TE.com >](#)



Connectors > PCB Connectors > Board-to-Board Connectors > Board-to-Board Jumpers & Shunts



Shunt Type: Tandem Spring

Shunt Style: Open Top

Number of Positions: 2

Centerline (Pitch): 2.54 mm [.1 in]

Contact Current Rating (Max): 3 A

Features

Product Type Features

Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	2
---------------------	---

Electrical Characteristics

Termination Resistance	20 mΩ
Insulation Resistance	1000 MΩ

Body Features

Handle	Without
Primary Product Color	Black

Contact Features

Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Contact Mating Area Plating Material	Tin



Contact Base Material	Phosphor Bronze
Shunt Type	Tandem Spring
Shunt Style	Open Top
Contact Current Rating (Max)	3 A

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Housing Material	Nylon, Polyester
Centerline (Pitch)	2.54 mm [.1 in]

Dimensions

Product Height	9.14 mm [.36 in]
----------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C [-40 – 185 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Approved Standards Products	UL Recognized
UL Flammability Rating	UL 94V-0

Packaging Features

Jumper & Shunt Packaging	Loose Piece
Packaging Quantity	5000
Packaging Method	Box

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC


Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 5-146282-2
02 MODII HDR SRST B/A .100CL




TE Part # 5-146274-2
02 MODII HDR SRST B/A .100CL



TE Part # 5-146278-2
02 MODII HDR SRST B/A .100CL


Also in the Series | AMP M Series

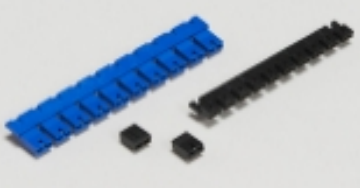


Board-to-Board Jumpers & Shunts(6)



Connector Caps & Covers(11)




Connector Hardware(18)



Connector Strain Relief(11)



Rack & Panel Connectors(1)



Rectangular Power Connectors(57)

Customers Also Bought



Documents

Product Drawings

[TDM SPRING, SHUNT ASY 2 POS](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_4-530153-1_AB.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-530153-1_AB.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-530153-1_AB.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Product Specifications

Application Specification

English

Tandem Spring Shunt Connectors

English

Agency Approvals

Agency Approval Document

English