
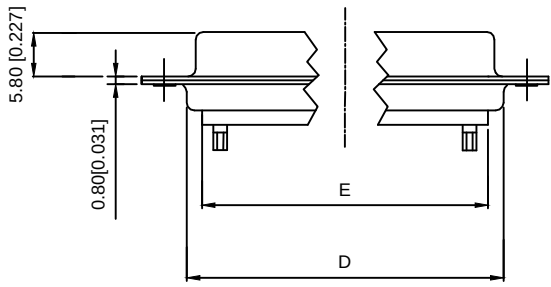
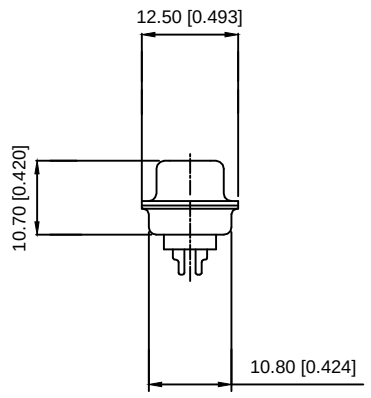



Specifications:
规格:
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000
AC/minute
耐受电压: ≥1000V AC/分钟
Temperature range:-25℃-+105℃
温度范围: -55℃-+105℃
Insulation resistance:500MΩMIN
绝缘电阻: ≥500MΩ
Contact resistance:25mΩMAN
接触电阻: ≤25mΩ
Material:
材料:
Contacts:Brass
接触: 黄铜
Insulator:PBT+30 %
绝缘体: PBT+30 %
Shell(Fead): SPCC
外壳:铁
MECHANIAL CHATACTERICS:
插拔力:
Contact Insertion force:300gf MAX
插入力:最大300gf
Contact Separation Force:25gf MIN
拔出力: 最小25gf

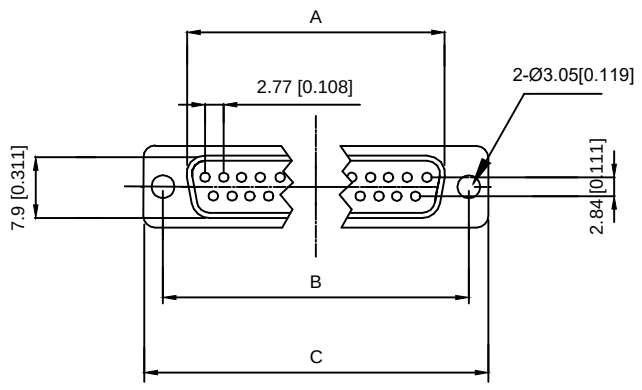


X01 XX F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
- ② Row No.Pin No.XX-09;15;25;37
- ③ Welding Board Angle :F-Fmale
- ④ T: Tradutional C: Car-pin
- ⑤ Planting Category: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:Au Sn
- ⑥ B:BLACK W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5

TYPE-2加前铆（不通孔）



TYPE-3加后铆（通孔）



NO.POS	A±0.38	B±0.13	C±0.20	D±0.38
9PIN	16.33	24.99	30.80	19.28
15PIN	24.66	33.32	39.20	27.65
25PIN	38.35	47.04	53.10	41.20
37PIN	54.80	63.50	69.40	57.44

						DSND		DATE		SCALE: N/A	MODEL TYPE:		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
Δx					tolerance: X.X ±0.2mm	CHKD		DATE		UNIT: mm/in	DWG NO.:		
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4	X01XXFXXXX		
Δx					X.XXX ±0.05mm	KXB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	•SHEET	REVISION
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES						1.0g	1/1	A0
REVISIONS													
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													