
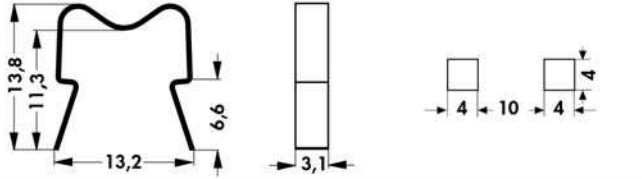
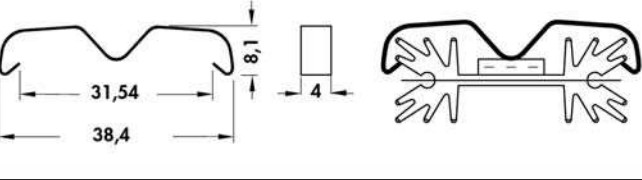
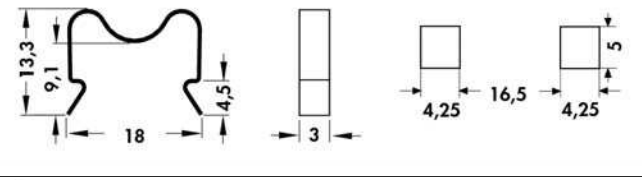
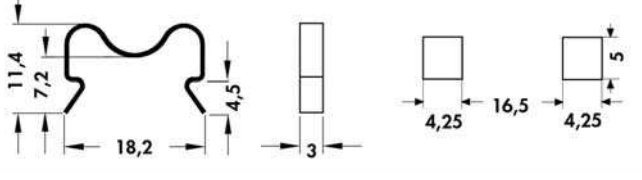
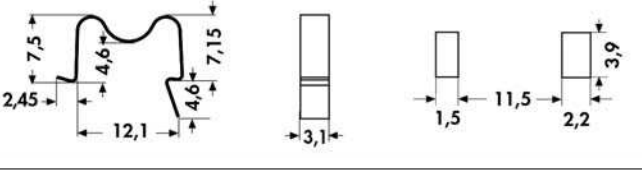
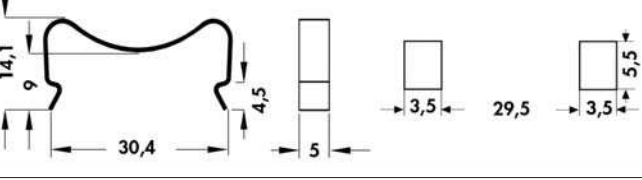
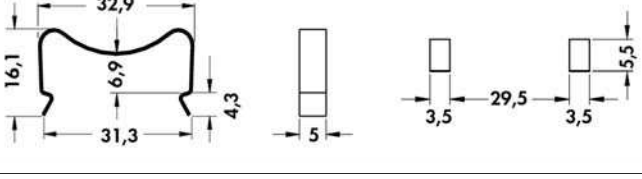
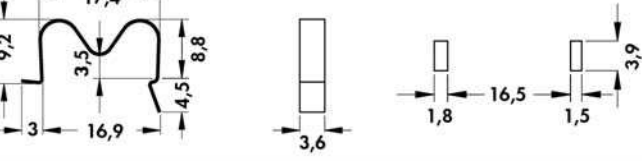


**Retaining springs for transistors**

art. no.	for transistor-housing	suitable for heatsinks	plate thickness [mm]		
<b>THF 129 TO 220</b>	TO 220	SK 129 FK 219 FK 222	1 - 2	FS	
<b>THF 104</b>	TO 220 TO 247 TO 248 TO 3 P	SK 104	1 - 2	FS	
<b>THF 409 TO 220</b>	TO 220 TO 247 TO 248 TO 3 P	SK 409 UK 35	1.5 - 3	RS	
<b>THF 409 SOT 32</b>	SOT 32 SOT 82 TO 126	SK 409	2 - 3	RS	
<b>THF 220</b>	TO 220	FK 219 FK 222	1 - 2	FS	
<b>THF 247</b>	TO 220 TO 247 TO 248 TO 3 P	SK 484	2	RS	
<b>THF 247 4</b>	TO 218 TO 220 TO 247 TO 248 TO 3 P	SK 460	4	RS	
<b>THF 220 17</b>	TO 218 TO 220 TO 247 TO 248 TO 3 P	UK 35	1 - 1.5	RS	

**material:** RS = stainless steel, FS = spring steel, corrosion protected