


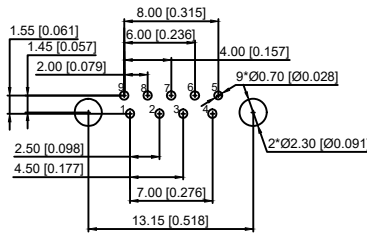




3D VIEW



Flat (F)



RECOMMENDER P.C.B.LAYOUT TOP VIEW  
(COMPONENT SIDE TOLERANCE±0.05)

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	SiGA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	SiGA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	SiGA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	SiGA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

Material  
Housing Material: LCP, UL94V-0, blue  
Contact Terminal: Brass  
Metallic Shell: Brass  
Plating  
Underplating: Nickel  
Contact Plating: 1µ" Gold  
Solder Tail: 100µ" Min. Tin  
Metallic Shell: Nickel  
Electrical  
Voltage Rating: 100 V AC  
Current Rating: 0.25A (Signal pins 2,3,5,6,7,8,9) 1.5A (Power Pins 1,4)  
Contact Resistance: 30mΩ Max.  
Insulation resistance: 1000MΩ Min.  
Dielectric withstanding voltage: 100V AC/Minute  
Mechanical  
Durability: 1500 cycles  
Mating Force: 35N (3.57Kgf) Max  
Unmating Force: 10N (1.02Kgf) Min. initial, 8N min after test  
Environmental and Processing  
Operating Temperature: -40°C to +85°C

U233-09XN-1BLPC15-X 2

1:Au 1U"  
5:Au 15U"  
6:Au 30U"

S:Scrolls F:Flat

					ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE:		
ΔX					L ≤ 4	±0.2	DWN	DATE	VIEW:	USB 3.0		
ΔX					4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	PART NO.:		
ΔX					16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5				U233-09XN-1BLPC15-X2		
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										1.0g	1/1	A0