

Disc Ceramic Capacitors




General Specifications - Class II General Purpose

DIELECTRIC - CLASS II

These ceramic capacitors have a high dielectric constant, what makes possible high capacitance values in reduced dimensions, however temperature coefficient and loss factor are greater than Class I.

Typical applications are decoupling and by pass.

Meets IEC 384-9 (1988).



HOW TO ORDER

5M	K	101	K	A	B	A	A
Product Code	Voltage	Capacitance	Tolerance	Lead Forming	Capacitor Diameter	Finishing	Packaging

100V / 500V PERFORMANCE CHARACTERISTICS CLASS II

Voltage Rating	100V ... 500V	1kV ... 5kV
Measured at	1.0 kHz @ 0.3 Vrms / 25°C	1.0 kHz @ 0.3 Vrms / 25°C
Dissipation Factor (%)	Y5E / Y5F / Y5P ≤ 2.5% Y5U / Y5V / Z5V ≤ 3.0%	Y5F ≤ 2.5% Y5U / Y5V ≤ 3.0%
Tolerance	$C_R < 10 \text{ pF} \rightarrow \pm 0.25 \text{ pF}, \pm 0.5 \text{ pF}$ $C_R \geq 10 \text{ pF} \rightarrow \pm 5\%, \pm 10\%$	$C_R < 10 \text{ pF} \rightarrow \pm 0.25 \text{ pF}, \pm 0.5 \text{ pF}$ $C_R \geq 10 \text{ pF} \rightarrow \pm 5\%, \pm 10\%$
Insulation Resistance (IR)	@ $V_R \rightarrow \geq 10 \text{ G}\Omega$	@ 500V $\rightarrow \geq 10 \text{ G}\Omega$
Dielectric Strength NOTE: Charging current limited to 50 mA	@ $V_R = 100\text{V} \rightarrow V_t = 250\text{V (DC)}$ @ $V_R = 500\text{V} \rightarrow V_t = 1250\text{V (DC)}$	$1.5 \times V_R + 500 \text{ (DC)}$
dV/dt test	–	up to 3.0 kV/μsec for 5NR; 5NS Series
Operating Temperature Range (°C)	-30... +85°C	-30 ... +85°C Phenolic Coated -30 ... +125°C Epoxy Coated
Climatic Category	30 / 085 / 21 Phenolic Coated	30 / 85 / 21 Phenolic Coated 30 / 85 / 56 Epoxy Coated




Note: Damp Heat Steady State: 90... 95% R.H. 40°C / 21 days. No voltage to be applied.

Disc Ceramic Capacitors



General Specifications - Class II General Purpose

TEMPERATURE COEFFICIENT – TYPICAL CURVES

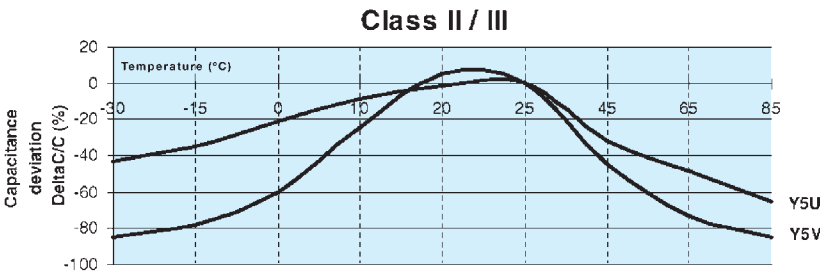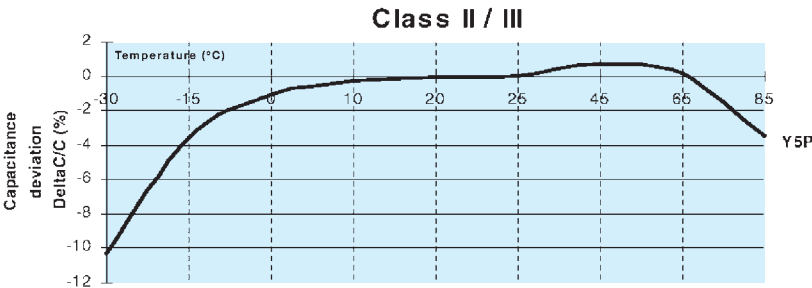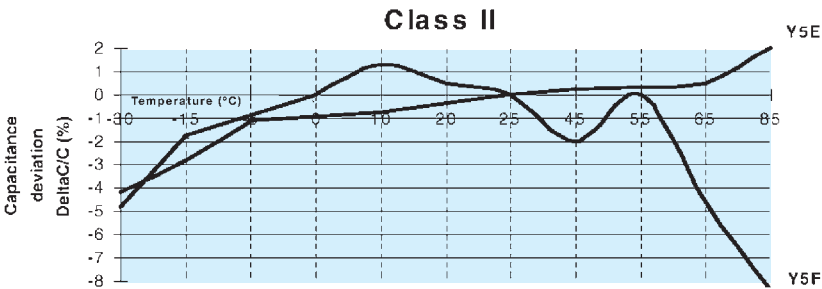

Disc Ceramic Capacitors

Dimension Table - Class II

Low and Medium Voltage General Purpose



100V / 500V CLASS II – CAPACITANCE VS. DISC DIAMETER

millimeters (inches)

Temp. Coefficient	Y5E		Y5F		Y5P		Y5U		Y5V		Z5V											
Digits 1,2,3 of P.N.	5MK	5MQ	5NK	5NQ	5OK	5OQ	5SK	5SQ	5TK	5TQ	5UK											
Rated Voltage (V _R)	100 VDC	500 VDC	100 VDC	500 VDC	100 VDC	500 VDC	100 VDC	500 VDC	100 VDC	500 VDC	100 VDC											
C _R (pF)																						
56	5.0 (0.197)	5.0 (0.197)																				
68																						
82																						
100																						
120																						
150																						
180																						
220																						
270																						
330																						
390																						
470																						
560	6.0 (0.236)	6.0 (0.236)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)																
680																						
820	7.0 (0.276)	7.0 (0.276)	6.0 (0.236)	7.0 (0.276)	6.0 (0.236)	6.0 (0.236)	5.0 (0.197)	5.0 (0.197)														
1,000																						
1,200																						
1,500																						
1,800	9.0 (0.354)	9.0 (0.354)	7.0 (0.276)	9.0 (0.354)	7.0 (0.276)	7.0 (0.276)				5.0 (0.197)												
2,200																						
2,700	10.0 (0.394)	11.0 (0.433)	9.0 (0.354)	10.0 (0.394)	9.0 (0.354)	9.0 (0.354)	6.0 (0.236)		5.0 (0.197)													
3,300	11.0 (0.433)	12.0 (0.472)																				
3,900		12.0 (0.472)	11.0 (0.433)	11.0 (0.433)	9.0 (0.354)	10.0 (0.394)		7.0 (0.276)														
4,700																						
5,600																11.0 (0.433)	14.0 (0.551)	7.0 (0.276)	9.0 (0.354)		6.0 (0.236)	5.0 (0.197)
6,800																						
8,200																						
10,000																						
12,000																						
15,000																						
22,000																						
33,000																						
47,000																						
100,000																						
							19.0 (0.748)	23.0 (0.906)			19.0 (0.748)											

Diameter (φ) = 9th Part Number Digit

Disc Ceramic Capacitors

Dimension Table - Class II

High Voltage - Class II General Purpose



1kV / 5kV CLASS II – CAPACITANCE VS. DISC DIAMETER

millimeters (inches)

Temp. Coefficient	Y5F			Y5U					Y5V		
Digits 1,2,3 of P.N.	5NR	5NS	5NT	5SR	5SS	5ST	5SU	5SW	5TR	5TS	5TT
Rated Voltage (V _R)	1000 VDC 100 VAC	2000 VDC 150 VAC	3000 VDC 150 VAC	1000 VDC 100 VAC	2000 VDC 150 VAC	3000 VDC 150 VAC	4000 VDC 150 VAC	5000 VDC 150 VAC	1000 VDC 100 VAC	2000 VDC 150 VAC	3000 VDC 150 VAC
C _R (pF)											
47	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)	5.0 (0.197)
56											
68											
82											
100											
120											
150											
180											
220											
270											
330											
390											
470											
560											
680	6.0 (0.236)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	8.0 (0.315)	
820											
1,000											
1,200											
1,500	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	9.0 (0.354)	
1,800											
2,200											
2,700											
3,300	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	10.0 (0.394)	
3,900											
4,700											
5,600											
6,800	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	11.0 (0.433)	
8,200											
10,000											
12,000											
15,000	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)	12.0 (0.472)
22,000											
50,000											
100,000											

Diameter (φ) = 9th Part Number Digit

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[5OQ102KOCAM](#) [5SQ472MOFAM](#) [5TQ103SAFAI](#) [5NR471MABCA](#) [5NR102MEDCA](#) [5ST103MCMCA](#)
[5NQ471KAAAH](#) [5NR101KEACA](#) [5NR102KEDCI](#) [5NR221MEACA](#) [5NR222MNHCL](#) [5NR271MNACL](#) [5NR331MEBCA](#)
[5NR331MEBCH](#) [5NR471MNBCL](#) [5NS751KEDCU](#) [5NT102MEGCA](#) [5NU911MCLID](#) [5SK103MEDAD](#)
[5SK103MEDAH](#) [5SK103MEDAI](#) [5SK502MEDAA](#) [5SQ104MCMMA](#) [5SR103MCJCA](#) [5SS102MBDCA](#) [5ST102MEDCA](#)
[5SX102MCHCA](#) [5SX472MCMCA](#) [5NX101MBFCA](#) [5SQ102MAAAI](#) [5SQ103MEHAA](#) [5SR502MEFCA](#) [5NR101KAALI](#)
[5NR221KAALI](#) [5SX102MQHCD](#) [5SR472MAFCA](#) [5SQ103PWHAA](#) [5SQ102MOAAM](#) [5TT472SAJCA](#) [5TT472MAJCA](#)
[5NR471KEBCA](#) [5NR471KABCI](#) [5NR102KEDCA](#) [5TK102ZAAAA](#) [5NQ102KODAL](#) [5MQ101KOAAM](#)
[5NR152MEECD](#) [5NR182KAGAI](#) [5NR221KAACA](#) [5OK102KOBAM](#) [5OQ102KACAH](#) [5OQ152KEDAA](#)
[5OQ152KODAM](#) [5OQ471KOAAM](#) [5SS103MBKCA](#) [5NT222KCJID](#) [5SQ103MEHAH](#) [5SR822MWJCA](#)
[5NR101KOACL](#) [5ST222MBGCA](#) [5MQ391KOBAM](#) [5NK101KOAAM](#) [5NK471KOBAM](#) [5NQ101KOAAM](#)
[5NQ271KOAAM](#) [5NQ391KOAAM](#) [5NQ471KOBAM](#) [5NQ821KOCAM](#) [5NR332KWJCA](#) [5NS102MBFCI](#)
[5OK102KABJH](#) [5OK102KABJI](#) [5OK221MAAJI](#) [5OK222KOEAM](#) [5OK471KOAAM](#) [5OK471MAAJI](#) [5OQ101KOAAM](#)
[5OQ102KACJA](#) [5OQ102MOCAM](#) [5OQ471MOAAM](#) [5OQ472KOHAM](#) [5OQ561KOAAM](#) [5SK103SOHAM](#)
[5SQ102MAAAA](#) [5SQ102MOAAL](#) [5SQ222MADAK](#) [5UK103ZOBAM](#) [5NR221MEAEA](#)