



为您的产品保驾护航

PRODUCT DATASHEET

Electro-Static Discharge

JEN1610-7V ESD

Features

- Small package: 1.6x1.0x0.5mm(DFN1610)
- Protects one data or power line
- Operating Voltage: 7V
- High peak pulse current capability
- Ultra low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
- RoHS compliant


Pin Description



Applications

- Mobile Phones and Accessories
- Battery Protection
- USB VBus
- Power Line Protection
- Hand Held Portable Applications

Schematic Diagram

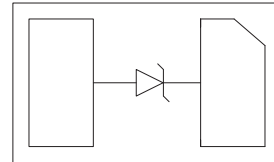


Limiting Values($T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified)

| Symbol | Parameter | Conditions | Value | Unit |
|------------------|---------------------------------|---------------------------------|-------------|------------------|
| V _{ESD} | Electrostatic Discharge Voltage | IEC 61000-4-2;Contact Discharge | ± 30 | kV |
| | | IEC 61000-4-2;Air Discharge | ± 30 | kV |
| P _{Pk} | Peak Pulse Power | t _P =8/20 μ s | 1875 | W |
| T _J | Operating Temperature Range | - | -55 to +125 | $^\circ\text{C}$ |
| T _{stg} | Storage Temperature Range | - | -55 to +150 | $^\circ\text{C}$ |


Electrical Characteristics($T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified)

| Symbol | Parameter | Conditions | Min | Typ. | Max | Unit |
|------------------|-------------------------|---|-----|------|------|---------------|
| V _{RWM} | Reverse Working Voltage | T _A =25 $^\circ\text{C}$ | - | - | 7 | V |
| V _{BR} | Breakdown Voltage | I _T =1mA | 7.5 | - | - | V |
| I _R | Reverse Leakage Current | V _{RWM} =7V | - | - | 0.5 | μA |
| V _F | Forward Voltage | I _F =10mA, | - | 1.0 | 1.2 | V |
| I _{PP} | Peak Pulse Current | t _P =8/20 μ s | - | - | 115 | A |
| V _C | Clamping Voltage | I _{PP} =10A(8x20 μ s pulse) | - | - | 12.0 | V |
| V _C | Clamping Voltage | I _{PP} =115A(8x20 μ s pulse) | - | - | 16.5 | V |
| C _J | Junction Capacitance | V _R =0V,f=1 MHz | - | - | 550 | pF |


Typical Characteristics

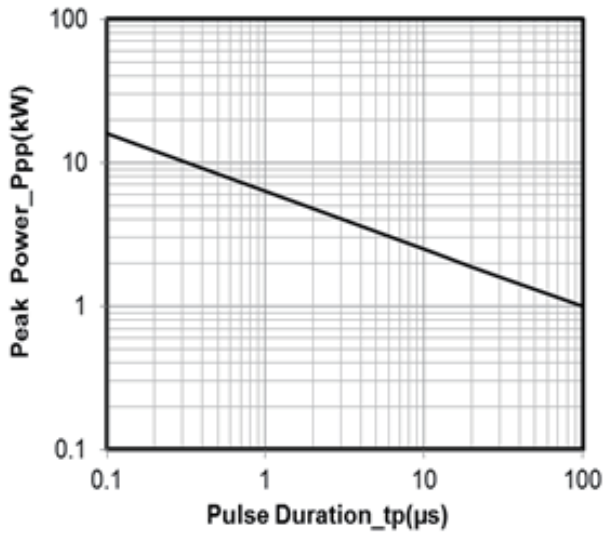


Junction Capacitance vs. Reverse Voltage

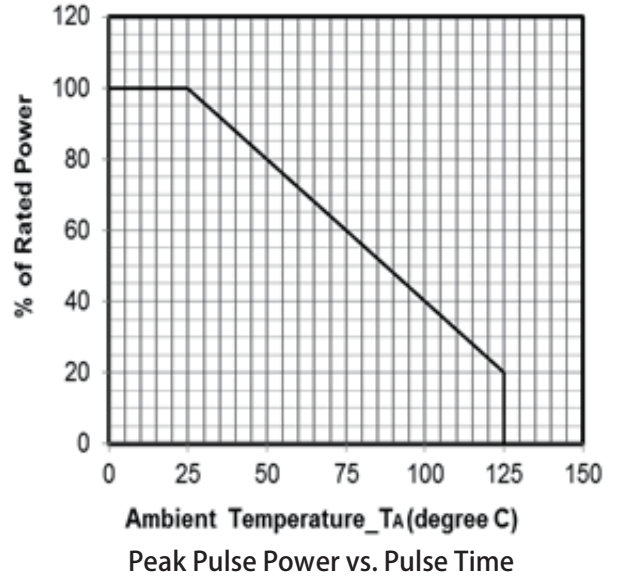


Peak Pulse Power vs. Pulse Time

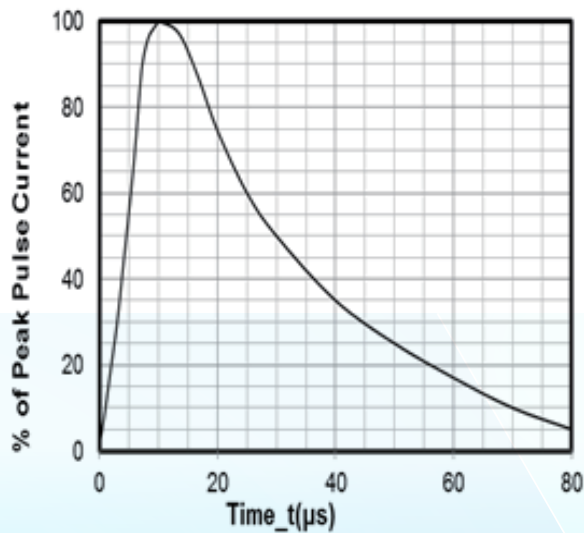

Clamping Voltage vs. Peak Pulse Current ($t_p = 8/20 \mu s$)

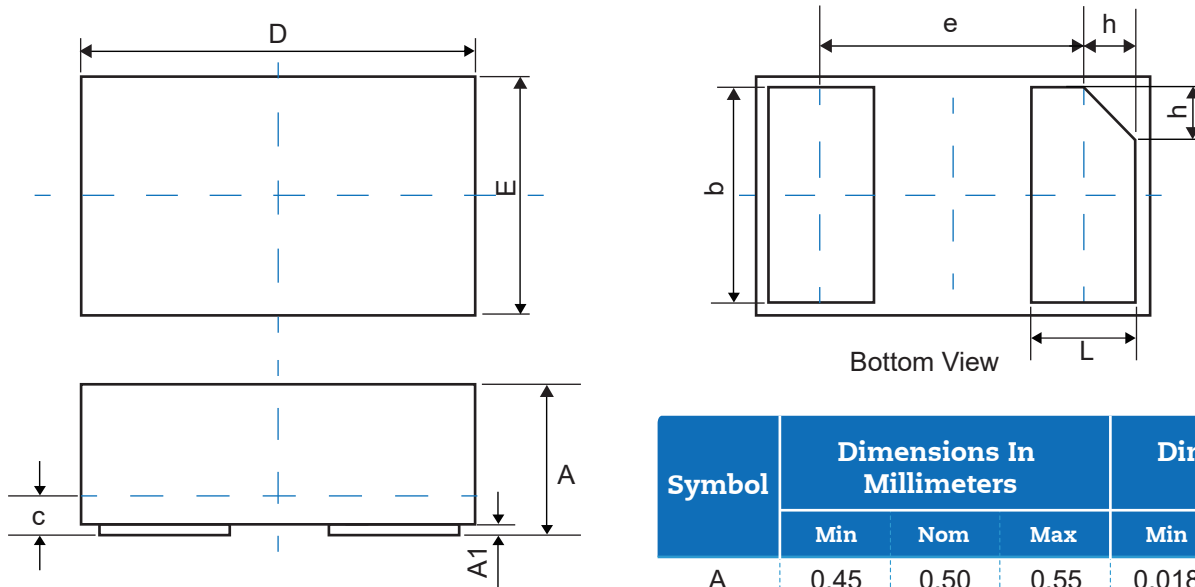Physical Dimensions(mm.)


| Symbol | Dimensions In Millimeters | | | Dimensions In Inches | | |
|--------|---------------------------|------|------|----------------------|-------|-------|
| | Min | Nom | Max | Min | Nom | Max |
| A | 0.45 | 0.50 | 0.55 | 0.018 | 0.020 | 0.022 |
| A1 | 0.00 | 0.02 | 0.05 | 0.000 | 0.001 | 0.002 |
| b | 0.75 | 0.80 | 0.85 | 0.030 | 0.032 | 0.034 |
| c | 0.10 | 0.15 | 0.20 | 0.004 | 0.006 | 0.008 |
| D | 1.55 | 1.60 | 1.65 | 0.062 | 0.064 | 0.066 |
| e | 1.10 BSC | | | 0.044 BSC | | |
| E | 0.95 | 1.00 | 1.05 | 0.038 | 0.040 | 0.042 |
| L | 0.35 | 0.40 | 0.45 | 0.014 | 0.016 | 0.018 |
| h | 0.15 | 0.20 | 0.25 | 0.006 | 0.008 | 0.010 |

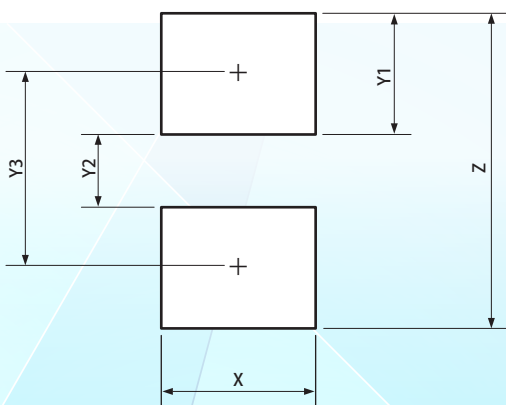
Suggested Land Pattern


| Symbol | Dimensions | |
|--------|-------------|--------|
| | Millimeters | Inches |
| X | 1.00 | 0.040 |
| Y1 | 0.62 | 0.025 |
| Y2 | 0.60 | 0.024 |
| Y3 | 1.22 | 0.049 |
| Z | 1.85 | 0.074 |

Packaging Quantity

| Part Number | Delivery Form | Delivery Quantity |
|-------------|---------------|-------------------|
| JEN1610-7V | 7"T&R | 3,000 |

Soldering Parameters

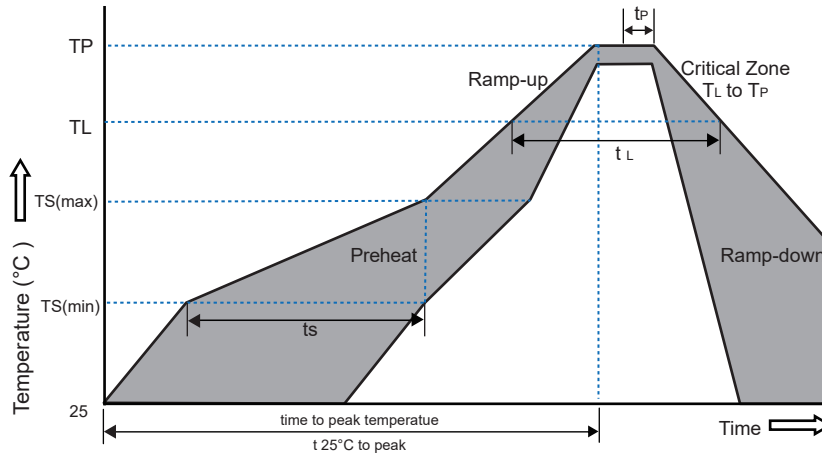

| Reflow Condition | | Pb-Free Assembly |
|--|----------------------------------|------------------|
| Pre-heat | -Temperature Min($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time(Min to Max)(t_s) | 60~180 secs. |
| Average ramp up rate (Liquid us Temp(T_L) to peak) | | 3°C/sec. Max |
| Ts(max) to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L)(Liquid us) | +217°C |
| | -Temperature (t_L) | 60~150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max |
| Ramp-down Rate | | 6°C/sec. Max |
| xTime 25°C to Peak Temp (TP) | | 8 min. Max |
| Do not exceed | | +260°C |

Part Number System

JE N1610 - 7V

