



Detector Switch > SPVT Series > SPVT110106

## 1.9mm-thick Two-way Operation Type SPVT Series

[Dimensions](#) | [Backside](#) | [Land Dimensions](#) | [Terminal Layout](#) | [Circuit Diagram](#) | [Packing Specifications](#) | [Soldering Conditions](#) |



Part number

**SPVT110106**

(SPVT110102)

The part number in ( ) is the old part number.

NET SHOP

3D CAD

RoHS

Print


Inquiry

Poles		1
Positions		1
Terminal type		For PC board (Reflow)
Operating force		0.4N max.
Operating direction		Right
Location lug		With
Side terminal		With both sides.
Operating temperature range		-40°C to +85°C
Rating (max.)/(min.) (Resistive load)		50mA 20V DC/100 μA 3V DC
Electrical performance	Contact resistance (Initial/After operating life)	500mΩ max./1Ω max.
	Insulation resistance	100MΩ min. 100V DC
	Voltage proof	100V AC for 1 minute
Mechanical performance	Terminal strength	0.5N for 1 minute
	Actuator strength	10N
Durability	Operating life without load	100,000 cycles 1Ω max.


Operating life with load 100,000 cycles 1Ω max.  
 Rating (max.)  
 (Resistive load)

Environmental performance	Cold	-40°C 96h
	Dry heat	85°C 96h
	Damp heat	40°C, 90 to 95%RH 96h
Minimum order unit (pcs.)	Japan	2,500
	Export	10,000


Dimensions

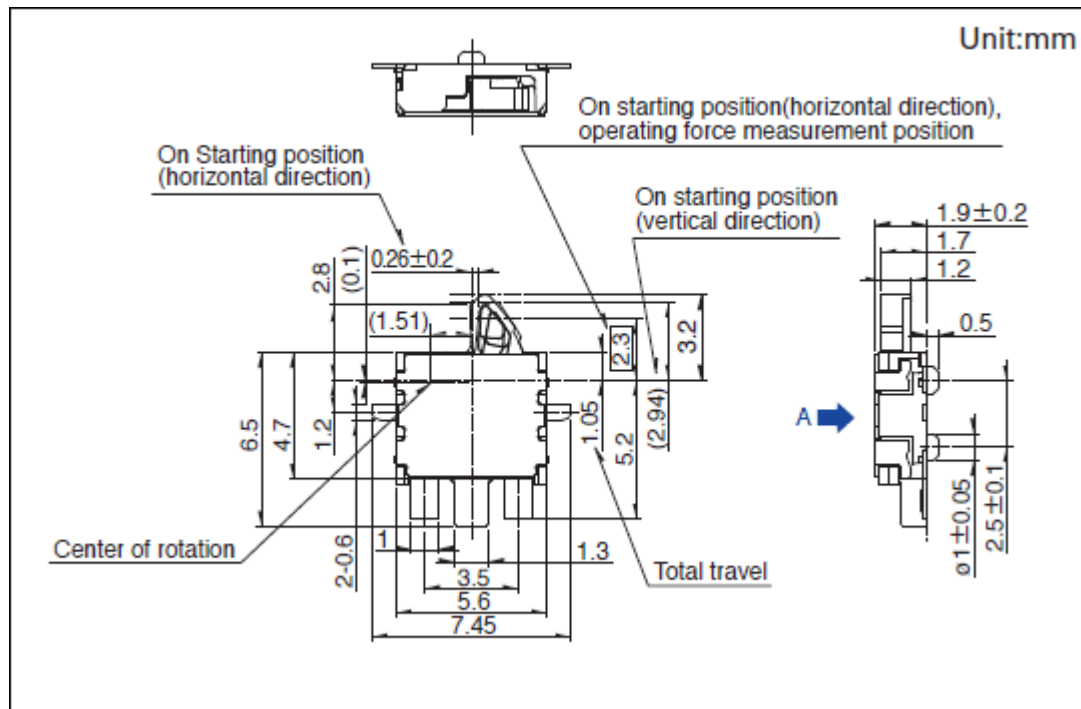

Backside

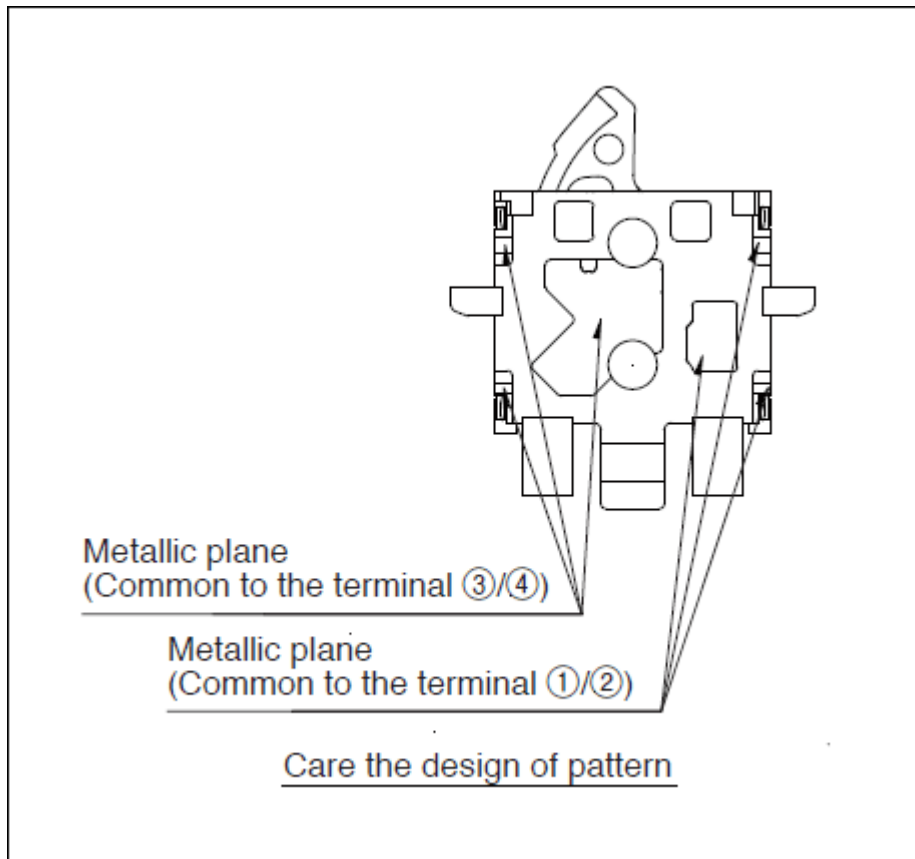


Land Dimensions

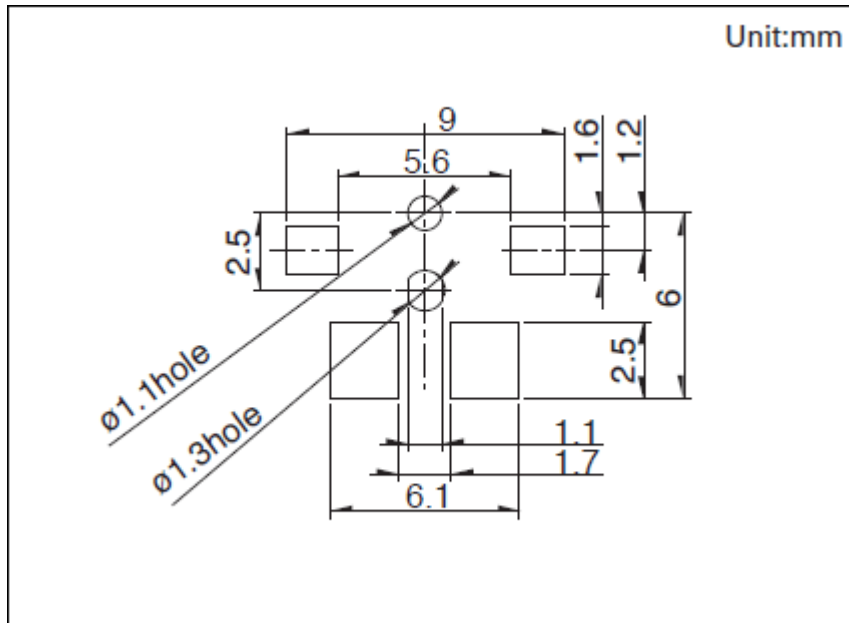


Viewed from direction A in the dimensions.

Terminal Layout

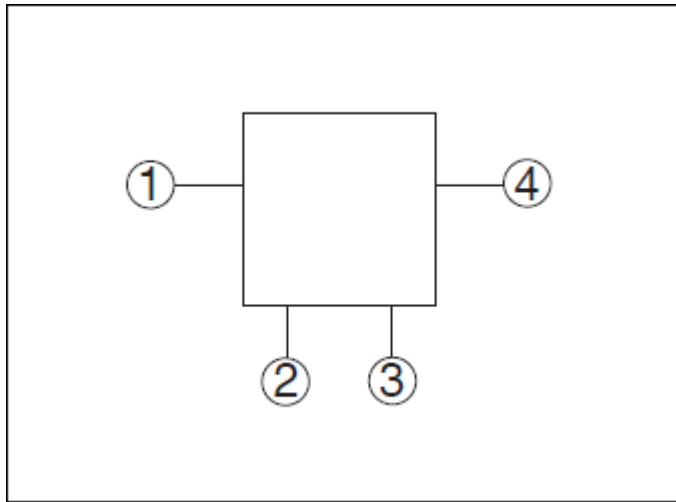


Circuit Diagram

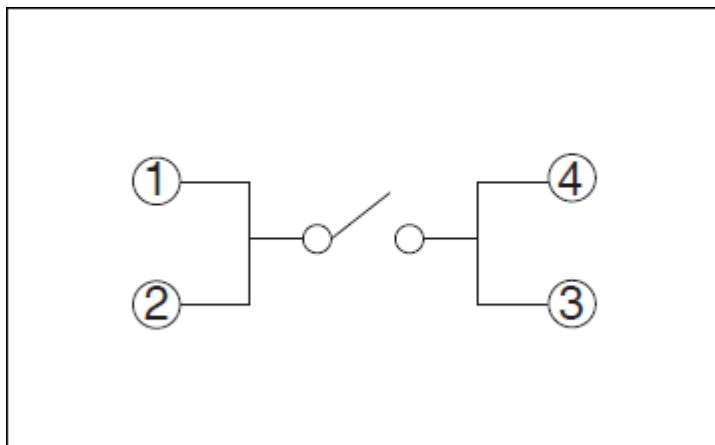

Packing Specifications

Taping

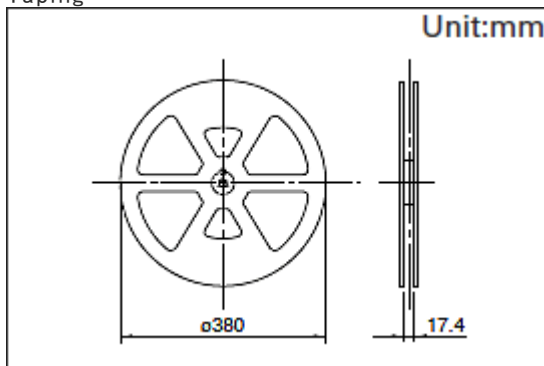

Number of packages (pcs.)	1 reel	2,500
	1 case / Japan	5,000
	1 case / export packing	10,000
<hr/>		
Tape width (mm)	16	
<hr/>		
Export package measurements (mm)	417 × 409 × 139	

## Soldering Conditions

Example of Reflow Soldering Condition


1. Heating method

Double heating method with infrared heater.

2. Temperature measurement

Thermocouple 0.1 to 0.2VCA (K) or CC(T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.

3. Temperature profile

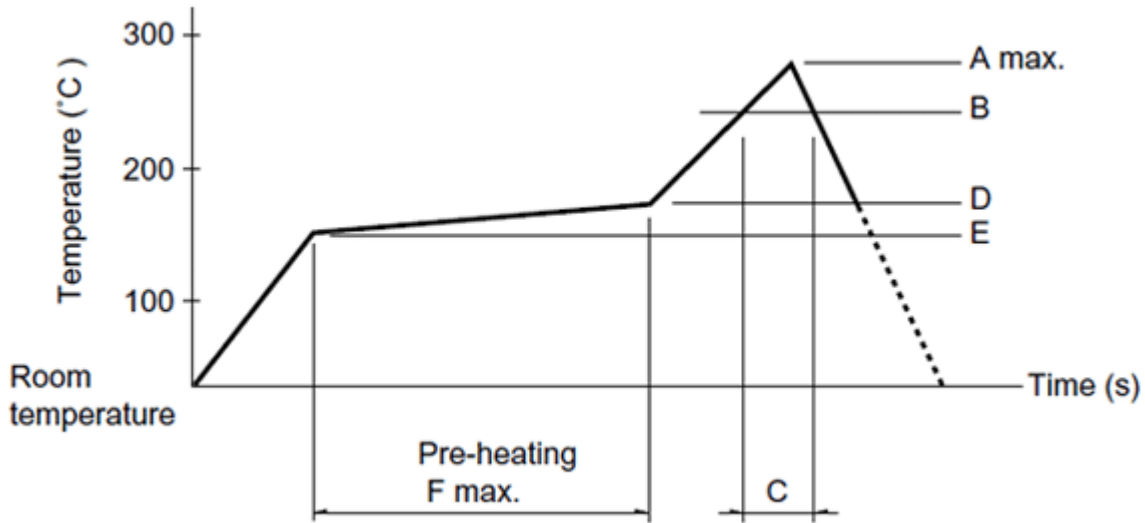

A(°C) 3s max.	B(°C)	C(s)	D(°C)	E(°C)	F(s)
260	230	40	180	150	120

(1) The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, surface depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.

(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

### Reference for Hand Soldering

Soldering temperature	350±5°C
Soldering time	3s max.

### Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. This unit cannot be used in water.
3. Please place purchase orders per minimum order unit (integer).
4. This products can be used in vehicles.  
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

### Inquiries about Products

Inquiry

