
1747785-1 - ACTIVE

TE Internal #: 1747785-1 Board-to-Board, 8 Position, 2 mm [.079 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors

View on TE.com >

connectivity

Connectors > PCB Connectors > Battery Connectors & Holders > DC Jack Connectors

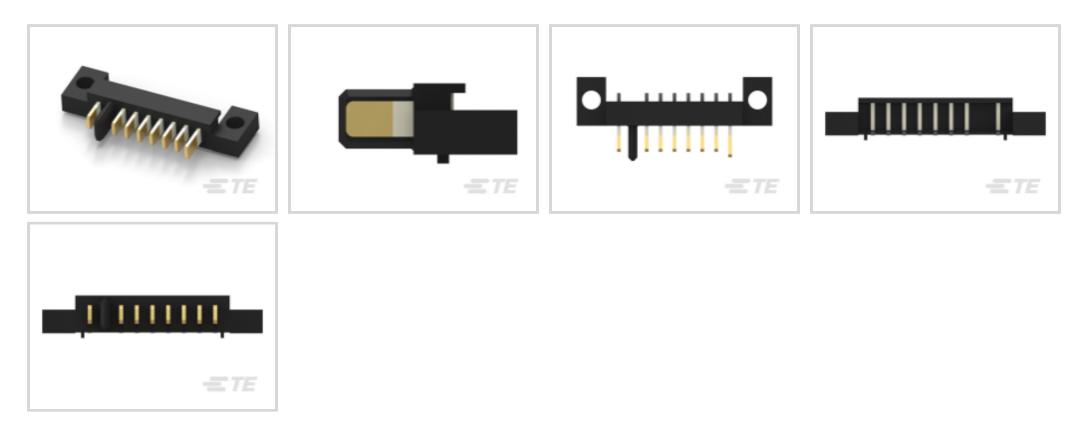

Connector System: Board-to-Board

Number of Positions: 8

Centerline (Pitch): 2 mm [.079 in]

Connector & Housing Type: Plug

Operating Voltage: 30 VDC

Features

Product Type Features

Connector System	Board-to-Board				
Connector & Housing Type	Plug				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Number of Positions	8				
PCB Mount Orientation	Right Angle				
Electrical Characteristics					
Operating Voltage	30 VDC				
Contact Features					
Contact Current Rating (Max)	6 A, 8 A				
Mechanical Attachment					
PCB Mount Retention	With				
PCB Mount Retention Type	Locating Post				
Connector Mounting Type	Board Mount				

1747785-1

Board-to-Board, 8 Position, 2 mm [.079 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



Housing Features	
Centerline (Pitch)	2 mm[.079 in]
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	60
Packaging Method	Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	
FU RoHS Directive 2011/65/FU	Compliant

EU RoHS Directive 2011/65/EUCompliantEU ELV Directive 2000/53/ECCompliantChina RoHS 2 Directive MIIT Order No 32, 2016No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

1747785-1

Board-to-Board, 8 Position, 2 mm [.079 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



Compatible Parts



TE Part # 1747786-1 PACKING,REC. ASSY. 8POS. 2MM PITCH BATTE



TE Part # 1932460-1 PLUG ASSY. 8POS. 2MM PITCH BATTERY CONNE



TE Part # 1747785-3 PACKING,PLUG ASSY. 8POS. 2MM PITCH BATTE

TE Part # 2201786-1 2mm pitch Battery Rec. Tray Assy. 8Pos.

Customers Also Bought



TE Part #61765-1	TE Part #2-520401-2	TE Part #567200-3	
FASTON ADAPTER .250 RECEPTACLE	ULTRA-FAST 187 ASY REC 22-18 TPBR	APPL,HDM,TAPE 9CB W/O DIES G	
BR			

Documents

Product Drawings PACKING, PLUG ASSY. 8POS. 2MM PITCH BATTE

English

CAD Files

Customer View Model

ENG_CVM_CVM_1747785-1_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1747785-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1747785-1_B.3d_stp.zip

1747785-1

Board-to-Board, 8 Position, 2 mm [.079 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC09_LAPTOPS_PORTABLES

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Product Specification

Japanese

Product Specification

English