
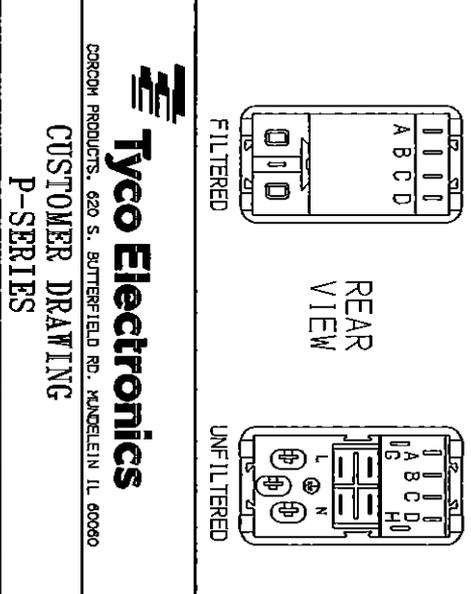
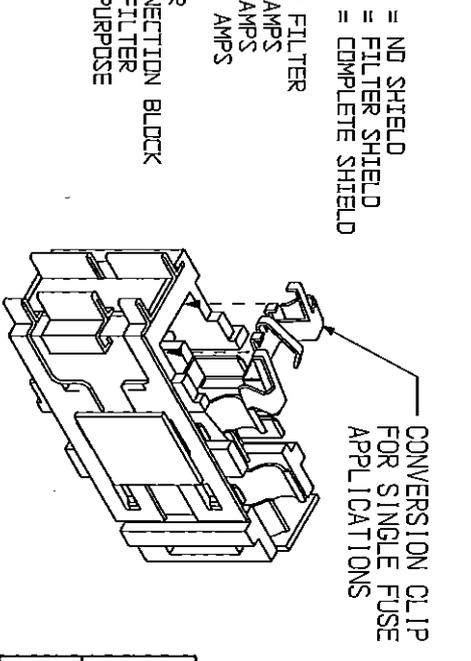
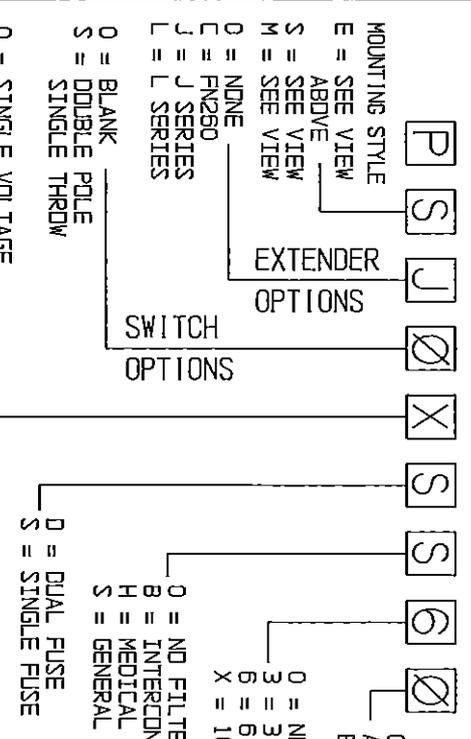
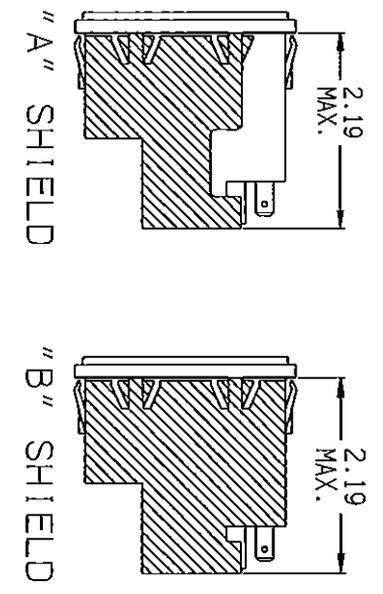
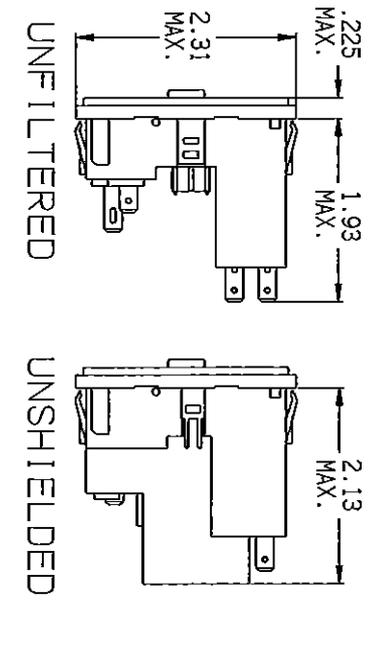
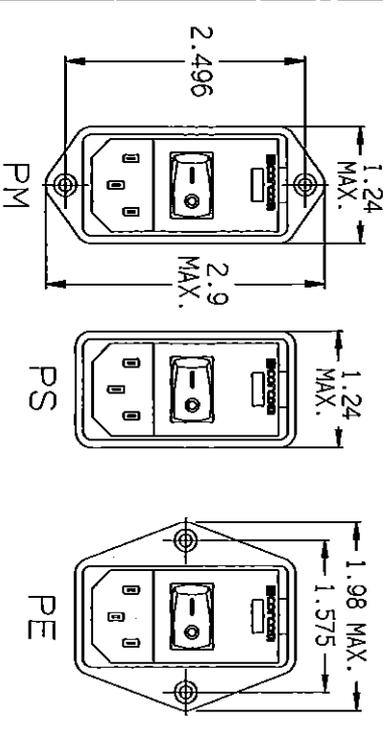
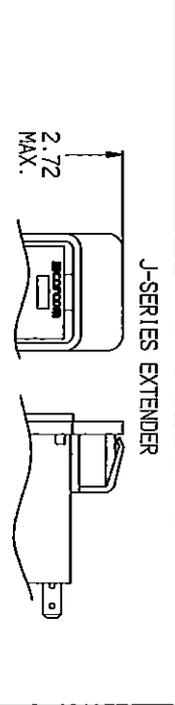
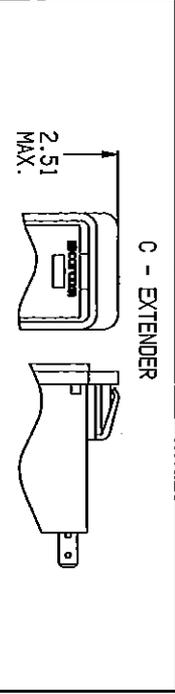


ECN#	APPROVD	DATE	REV
10-002963	ELC	19AUG10	C
12-015327	TAM	12AUG12	D

MINIMUM INSERTION LOSS IN DB LINE TO GROUND IN 50 OHM CIRCUIT			MINIMUM INSERTION LOSS IN DB LINE TO LINE IN 50 OHM CIRCUIT				
CURRENT RATING	FREQUENCY MHZ	CURRENT RATING	FREQUENCY MHZ	CURRENT RATING	FREQUENCY MHZ		
H MODELS							
3 AMP	21	27	30	29	26	23	15
6 AMP	11	15	17	19	18	16	13
10 AMP	5	8	10	12	11	11	10
S MODELS							
3 AMP	21	27	33	40	44	50	32
6 AMP	12	17	23	32	36	44	30
10 AMP	5	10	13	23	27	35	27

RECOMMENDED PANEL CUTOUTS			
STYLE	DIMENSION 'A'	DIMENSION 'B'	
UNSHIELDED	SHIELDED		
PS	1.06	1.12	2.201 *
PSL	1.12		2.201 *
PE	1.12	1.12	2.201 *
PM	1.06	1.12	2.13
PSC	1.06	1.12	2.52
PSJ	1.06	1.12	2.6

* FOR PANEL THICKNESS OF 0.031" - 0.079" ONLY.
USE 2.213 FOR PANEL THICKNESS OF 0.083" - 0.114"

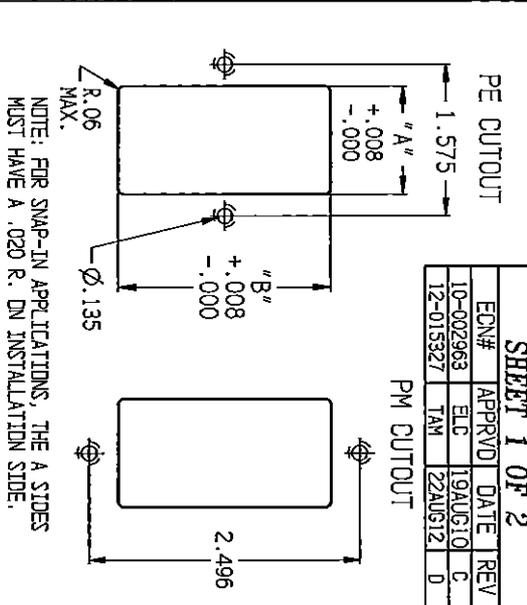

P = MOUNTING STYLE ABOVE
 S = SEE VIEW ABOVE
 J = SEE VIEW M
 Ø = NONE
 X = FN260
 L = J SERIES
 L = L SERIES
 0 = BLANK
 S = DOUBLE POLE SINGLE THROW
 0 = SINGLE VOLTAGE
 S = DUAL VOLT. SELECT (SWPS)
 X = DUAL VOLT. SELECT (SERIES/PARALLEL)

0 = ND FILTER
 3 = 3 AMPS
 6 = 6 AMPS
 X = 10 AMPS
 0 = ND SHIELD
 A = FILTER SHIELD
 B = COMPLETE SHIELD

0 = ND FILTER
 B = INTERCONNECTION BLOCK
 H = MEDICAL FILTER
 S = GENERAL PURPOSE

TYCO ELECTRONICS PART NO.
CUSTOMER DRAWING
P-SERIES
 SCALE: 1:1.2 DATE: 2-4-97 DRAWING NUMBER: P-SERIES REV. D
 CORCON PRODUCTS, 620 S. BUTTERFIELD RD. WANDERLEIN IL 60090

