

Ordering Information:
A1252WV-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0




GWT: Nylon 66,UL94V-0,GWT 750℃

6T: Nylon 6T,UL94V-0




3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

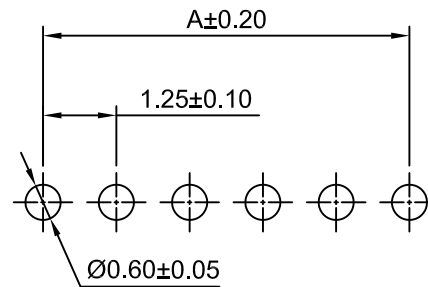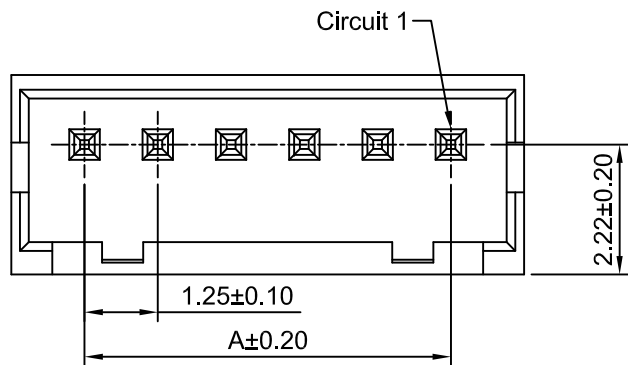

P.C.B LAYOUT

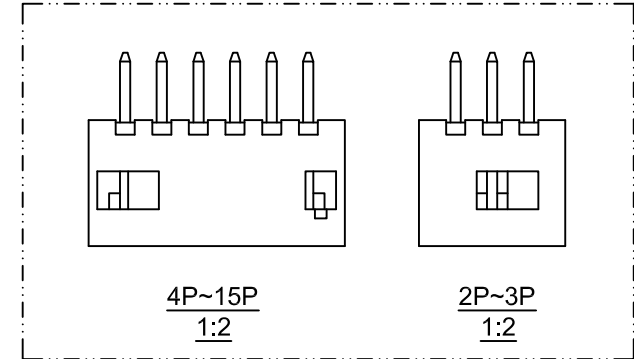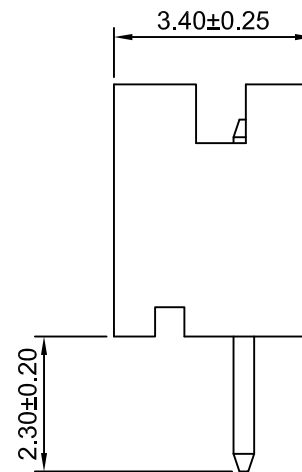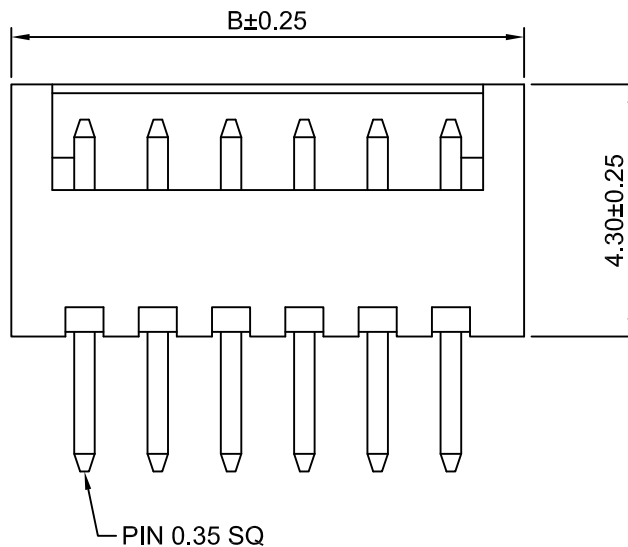

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	3.75	9P	10.00	12.50
3P	2.50	5.00	10P	11.25	13.75
4P	3.75	6.25	11P	12.50	15.00
5P	5.00	7.50	12P	13.75	16.25
6P	6.25	8.75	13P	15.00	17.50
7P	7.50	10.00	14P	16.25	18.75
8P	8.75	11.25	15P	17.50	20.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 1.25mm Pitch Vertical Wafer	
mm	8:1	1 of 1		
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO. A1252WV-XP	
x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°				
			REV A3	

A3	CHANGE THE DRAWING	2023.03.17
A2	CHANGE THE DIMENSIONS	2020.02.21
A1	ADD THE INFORMATION	2019.03.09
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE