

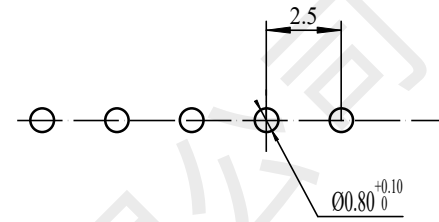
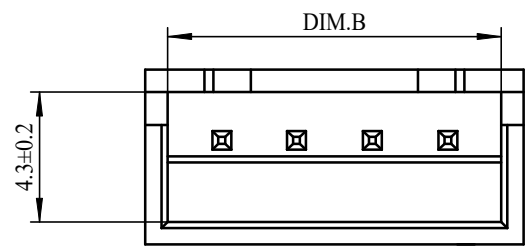
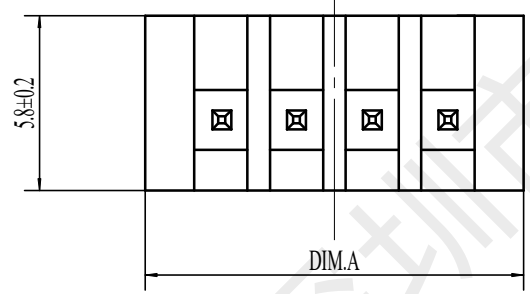
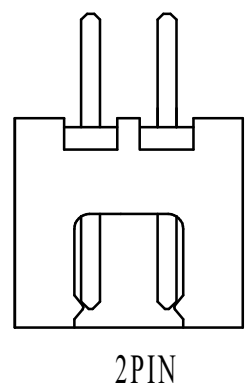


| REV. | EC# | DESCRIPTION | DATE      | DRAWN | CHECK | APPROVED |
|------|-----|-------------|-----------|-------|-------|----------|
| 1.00 |     | 初版发行        | 2020-8-28 |       |       |          |
|      |     |             |           |       |       |          |
|      |     |             |           |       |       |          |

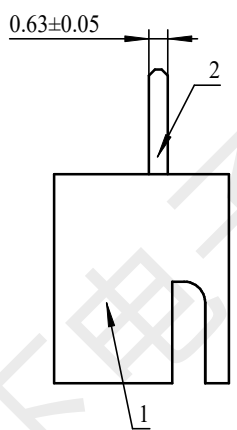

| NUMBER OF PINS | DIM.A | DIM.B | DIM.C |
|----------------|-------|-------|-------|
| 15P            | 40    | 38.6  | 35    |
| 14P            | 37.5  | 36.1  | 32.5  |
| 13P            | 35    | 33.6  | 30    |
| 12P            | 32.5  | 31.1  | 27.5  |
| 11P            | 30    | 28.6  | 25    |
| 10P            | 27.5  | 26.1  | 22.5  |
| 9P             | 25    | 23.6  | 20    |
| 8P             | 22.5  | 21.1  | 17.5  |
| 7P             | 20    | 18.6  | 15    |
| 6P             | 17.5  | 16.1  | 12.5  |
| 5P             | 15    | 13.6  | 10    |
| 4P             | 12.5  | 11.1  | 7.5   |
| 3P             | 10    | 8.6   | 5     |
| 2P             | 7.5   | 6.1   | 2.5   |

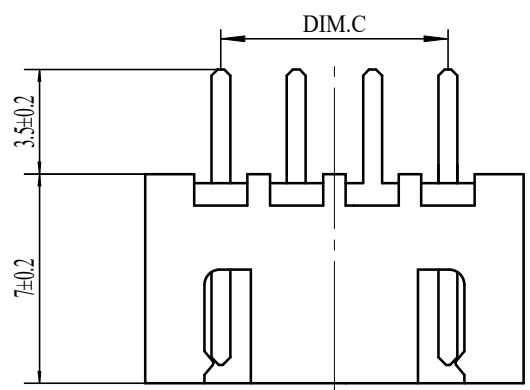

适应基板厚度: 1.2mm~1.6mm  
 温度范围: -25℃~85℃  
 额定电压: 250V AC/DC  
 额定电流: 3A  
 接触电阻: ≤0.02 Ω  
 绝缘电阻: ≥100M Ω  
 耐压: 1000V AC/minute

技术要求:

- 1) 材质:见附表;
- 2) 电镀:见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

|     |         |       |                        |
|-----|---------|-------|------------------------|
| 2   | PIN     | n PCS | 材质:黄铜,电镀:镀亮锡60u"MIN    |
| 1   | Housing | 1 PCS | 材质:PA66(UL94V-0),颜色:白色 |
| NO. | NAME    | Q'TY  | DESCRIPTION            |

 **深圳市韩下电子有限公司**

|                  |     |           |   |             |            |                |
|------------------|-----|-----------|---|-------------|------------|----------------|
| DRAW :           | 黄彬  | 2020-8-28 | TITLE:  | 插件针座        | DRAW NAME: | HX XH2.54-8PZZ |
| DESIGN:          |     |           | SERIES:   | 1501 SERIES | DRAW NO.   |                |
| CHECK:           | 张伟  | 2020-8-28 | P/N:  |             | UNIT:      | mm             |
| APPROVED         | 罗小春 | 2020-8-28 | REV. 1.00   | SCALE N/A   | SHEET:     | 1/1            |
| CUSTOMER DRAWING |     |           |  |             |            |                |

| GENERAL TOLERANCES |       |        |        |
|--------------------|-------|--------|--------|
| DIM                | TOL   | DIM    | DEG    |
| X                  |       | X°     | ±3.00° |
| X.X                | ±0.35 | X.X°   | ±2.00° |
| X.XX               | ±0.25 | X.XX°  | ±1.00° |
| X.XXX              | ±0.15 | X.XXX° |        |