
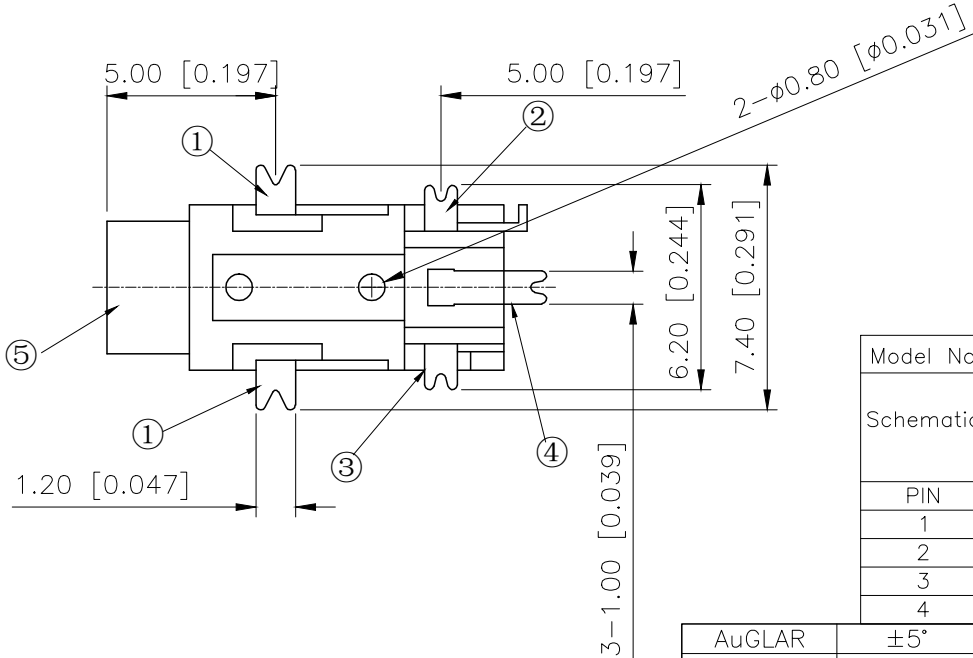
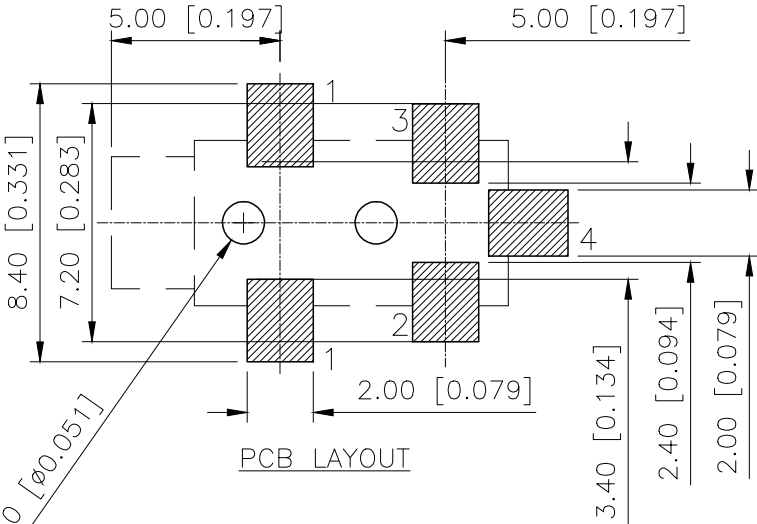
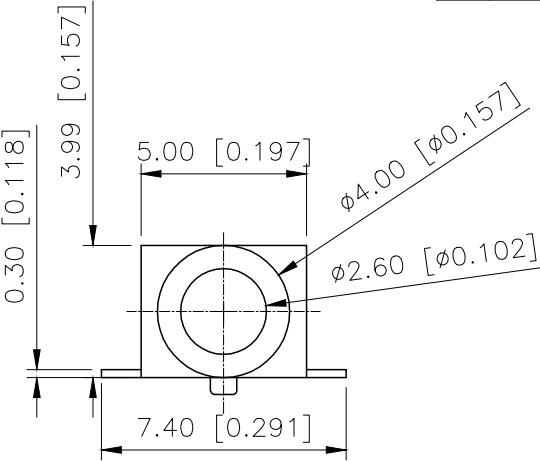


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.7	阿树

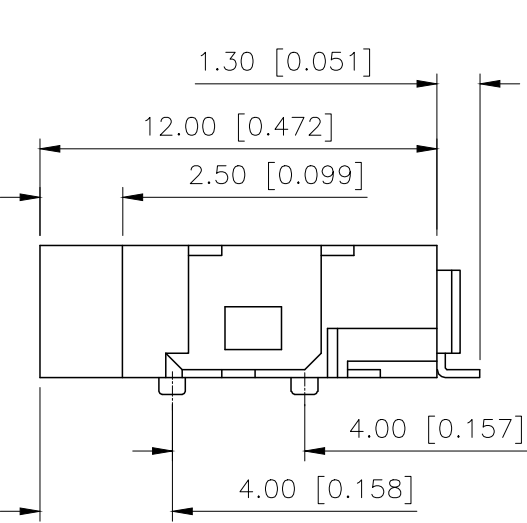

SPECIFICATIONS:
Temperature range: -40~+55℃
RATING: DC 30V 0.5A
Contact resistance: ≤30mΩ
Insulation resistance: ≥100MΩ DC250V
Withstanding voltage: AC 500V (50Hz)/min
Plugging force: 3~20N
Life Test: 5000次

Model No	PJ-209X-B-SMT	PJ-209X-3B-SMT				
Schematic			5	Pedestal	1	PA
PIN			4	terminal4	1	Phosphor bronze T=0.25
1	sleeve	sleeve	3	terminal3	1	
2	tip	tip	2	terminal2	1	
3	NP	ring	1	terminal1	1	Brass T=0.25
4	tip switch	tip switch	NO	NAME	QTY	MATERIAL
						Remark

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.50 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-209X-X-SMT
APPROVED		SIZE:	A4	DWG NO.:	