
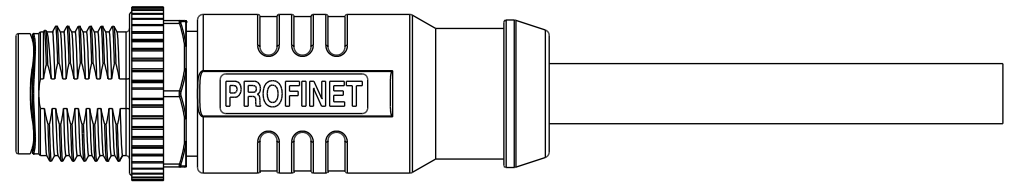
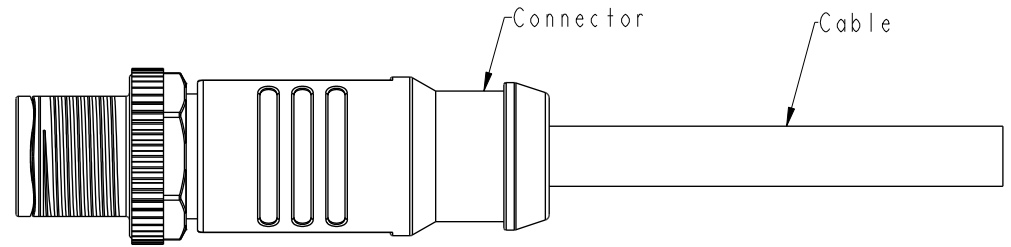
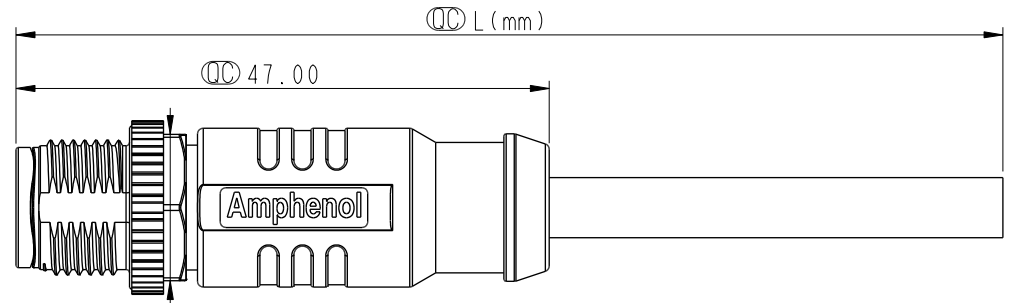



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022-12-14	Jiahe Lin	Rev.01 To Rev.A

MSDS-XXBMMM-SL8LXX
 XX: No. Of Pin XX:01~99Meters
 01:01Meter
 02:02Meters
 ...
 99:99Meters



- Note:
- * RoHS Compliant
 - * \varnothing Important dimension
 - * Waterproof rate: IP68, mated 1m/24h, IP69K mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: UL20549, CAT-5E, 22#*4C+AL/MY+B+F, OD=6.5mm, TPU Jacket, Green
 - * Cable length tolerance: 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm



Shield	Braid	編織
4	Blue	藍
3	Orange	橘
2	White	白
1	Yellow	黃
Connector	Wire Color	
Pin Out		

Pin Assignments Front View

UNIT:mm TOLERANCE ±0.5mm	TITLE N SEN, M12 D -SHLD, SCREW CABLE W/O SR, M, M, MOLDING		<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Jiahe Lin	DATE 2022-12-14	
	SCALE 3:2	SIZE A4		SHEET 1 OF 2	DWG NO MSDS-XXBMMM-SL8LXX	CHECKED BY Allen Pan	DATE 2022-12-14
	REV. A	WC-REV. A.2		\varnothing Inspection item	CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2022-12-14