

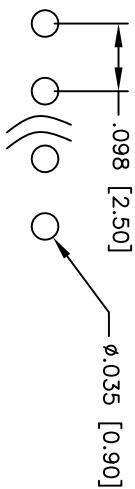
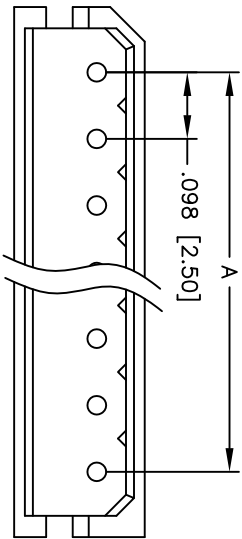


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/09	
A		REVISED DIM.	7/07/10	
B		REVISED SPEC.	05/15/12	

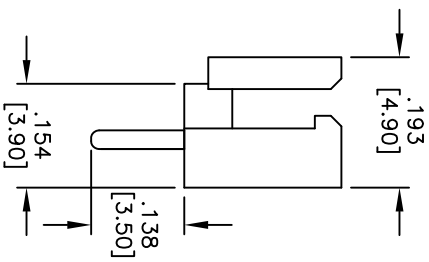

Recommended PCB Layout

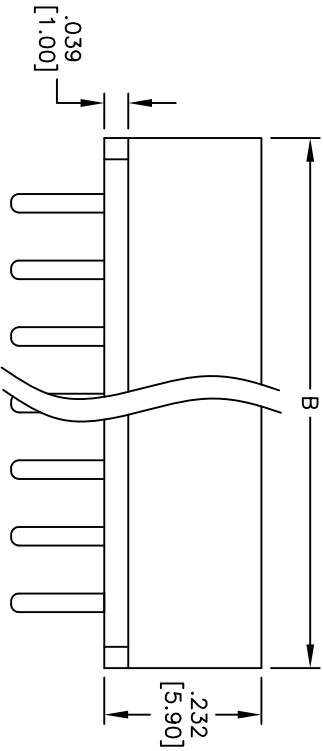

SPECIFICATIONS:

Material:
 Insulator: Nylon66, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
 Plating:
 Tin over copper underplate overall.
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Mechanical:
 Temperature Rating:
 Operating temperature: -40°C to $+105^{\circ}\text{C}$
 Environmental:
 Lead free, RoHS compliant

Positions: 02 thru 20
 $A = .098 [2.50]$ x No. of Spaces
 $B = .098 [2.50]$ x No. of Spaces + $.197 [5.00]$

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.098 [2.50] PITCH WAFER, STRAIGHT PCB**

LOW PROFILE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	1/10/09
APPROVED	

SIZE	PART NO.	REV.
X	25SH-E-XX-TS	B
REF:	S00723T	SHEET 1 OF 1
SCALE:	NTS	

