
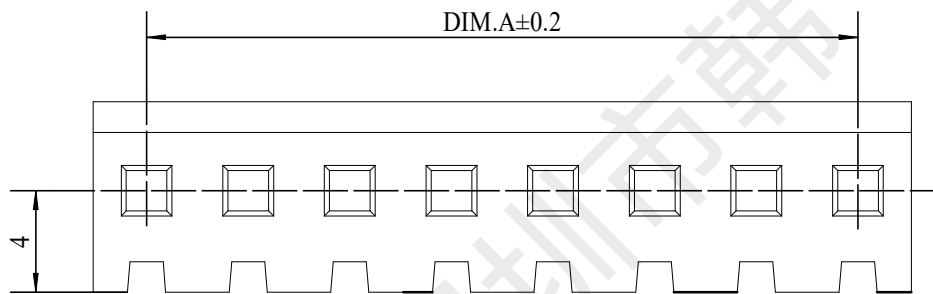
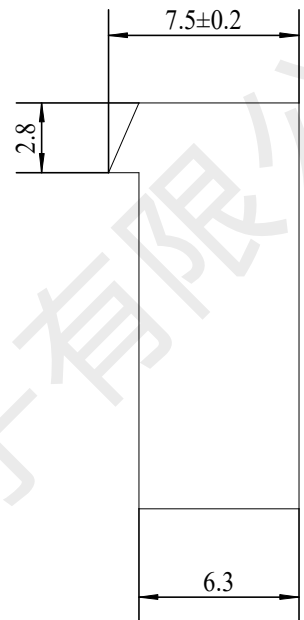


REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECK	APPROVED
1.00		初版发行	2020-05-28			

NUMBER OF PINS	DIM. A	DIM. B
9P	31.68	35.92
8P	27.72	31.96
7P	23.76	28
6P	19.8	24.04
5P	15.84	20.08
4P	11.88	16.12
3P	7.92	12.16
2P	3.96	8.2

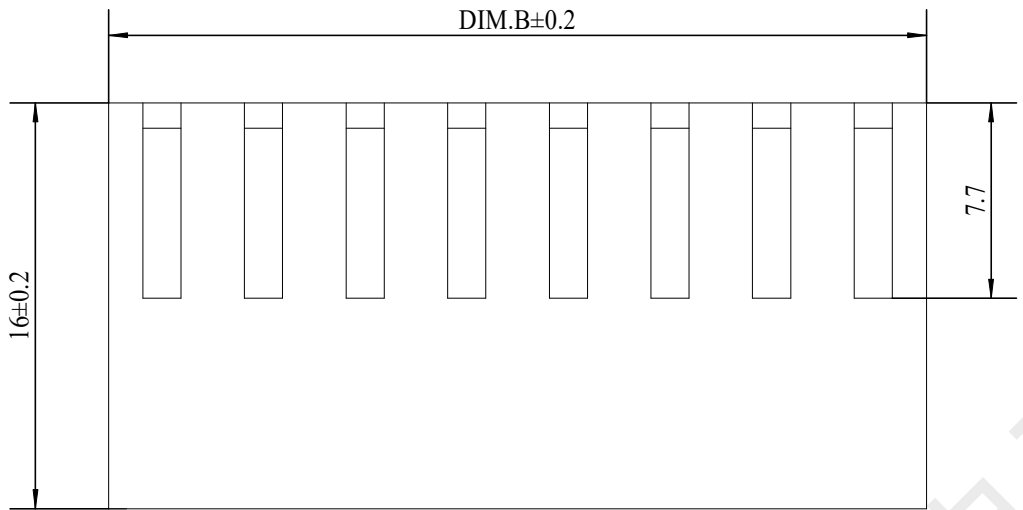

适用线规: AWG 26#~18#  
 温度范围: -25℃~85℃  
 额定电压: 250V AC/DC  
 额定电流: 7A  
 接触电阻: ≤0.01Ω  
 绝缘电阻: ≥1000MΩ  
 耐压: 1500V AC/minute

技术要求:

- 1) 材质:见附表;
- 2) 电镀:见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

1	Housing	1 PCS	材质:PA66 (UL94V-0),颜色:本色
NO.	NAME	Q' TY	DESCRIPTION

**韩下 HANXIA** 深圳市韩下电子有限公司

DRAW :	黄彬	2020-05-28	TITLE:	HX CH3.96-5P	DRAW NAME:	压线端子胶壳
DESIGN:			SERIES:	1501 SERIES	DRAW NO.	
CHECK:	张伟	2020-05-28	P/N:		UNIT:	SHEET:
APPROVED	罗小春	2018-05-28	CUSTOMER DRAWING	REV. 1.00	SCALE	N/A
				UNIT:	mm	SHEET:
					1/1	

GENERAL TOLERANCES			
DIM	TOL	DIM	DEG
X.		X°	±3.00°
X.X	±0.35	X.X°	±2.00°
X.XX	±0.25	X.XX°	±1.00°
X.XXX	±0.15	X.XXX°	