
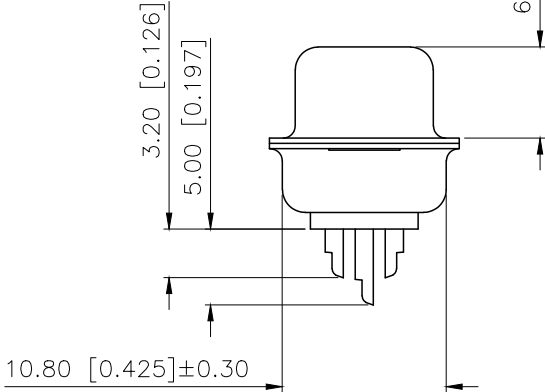
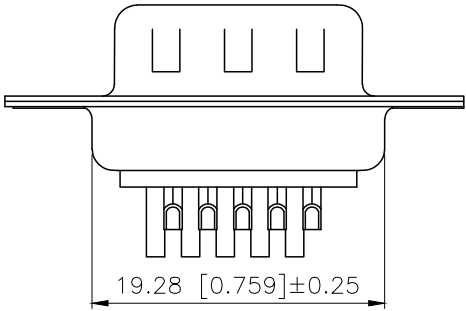


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		料号说明pin数修改	2024.07.27	阿树
A2	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.10	阿树

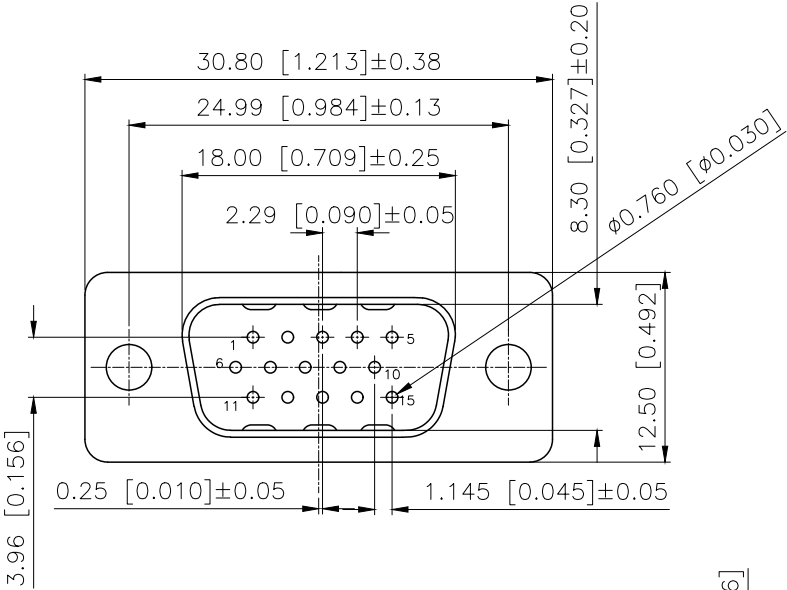

Specifications:

1.Voltage rating:250V AC/DC
额定电压: 250V AC/DC

2.Current rating:3A AC/DC
额定电流:3A AC/DC

3.Withstanding voltage:500V AC/minute
耐受电压:500V AC/分钟

4.Temperature range:-55℃~+105 ℃
温度范围:-55℃~+105 ℃

5.Insulation resistance:≥1000MΩ
绝缘电阻:≥1000MΩ

6.Contact resistance:≤30mΩ
接触电阻:≤30mΩ

7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0

8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀镍/镀锡/镀金

9.Terminal:Copper alloy
端子: 铜合金

PART NO.:

X04 15 W X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Row No-Pin No: 15Pin
③Welding Board Angle:W-Male
④T:Tradutlional C:Car-pin
⑤Planting Categoty:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
⑥Color:B-Black W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4


铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0415WXXXX
APPROVED		SIZE: A4	DWG NO.:

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A1	N/A		料号说明pin数修改	2024.07.27
A2	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.10

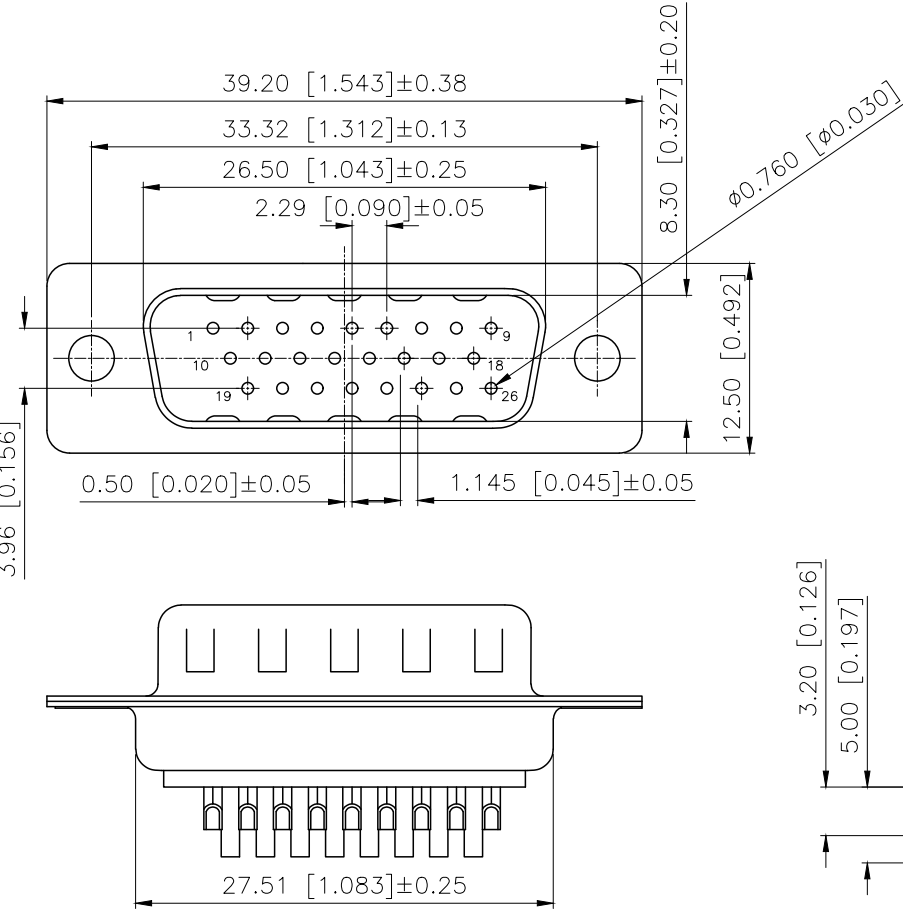

Specifications:

- Voltage rating: 250V AC/DC
额定电压: 250V AC/DC
- Current rating: 3A AC/DC
额定电流: 3A AC/DC
- Withstanding voltage: 500V AC/minute
耐受电压: 500V AC/分钟
- Temperature range: -55°C ~ +105 °C
温度范围: -55°C ~ +105 °C
- Insulation resistance: $\geq 1000M\Omega$
绝缘电阻: $\geq 1000M\Omega$
- Contact resistance: $\leq 30m\Omega$
接触电阻: $\leq 30m\Omega$
- Rubber core: PBT UL94V-0
胶芯: PBT UL94V-0
- The iron shell: SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀锌/镀锡/镀金
- Terminal: Copper alloy
端子: 铜合金

PART NO.:

X04 26 W X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
② Row No-Pin No: 26Pin
③ Welding Board Angle: W-Male
④ T: Traditional C: Car-pin
⑤ Planting Category:
1: 1u 2: 2u 3: 3u 4: 5u 5: 15u 6: 30u 7: AuSn
⑥ Color: B-Black W-White BL-Blue
⑦ 1: TYPE-1; 2: TYPE-2; 3: TYPE-3; 4: TYPE-4

铆合方式	TYPE-1: 铆合	TYPE-2: 前铆实心螺母	TYPE-3: 后铆空心螺母	TYPE-4: 后铆空心螺母锁螺丝
图示				

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0426WXXXX
APPROVED		SIZE: A4	DWG NO.:

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A1	N/A		料号说明pin数修改	2024.07.27
A2	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10

Specifications:

1.Voltage rating:250V AC/DC
额定电压: 250V AC/DC

2.Current rating:3A AC/DC
额定电流:3A AC/DC

3.Withstanding voltage:500V AC/minute
耐受电压:500V AC/分钟

4.Temperature range:-55℃~+105 ℃
温度范围:-55℃~+105 ℃


5.Insulation resistance:≥1000MΩ
绝缘电阻:≥1000MΩ

6.Contact resistance:≤30mΩ
接触电阻:≤30mΩ

7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0

8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀镍/镀锡/镀金

9.Terminal:Copper alloy
端子: 铜合金

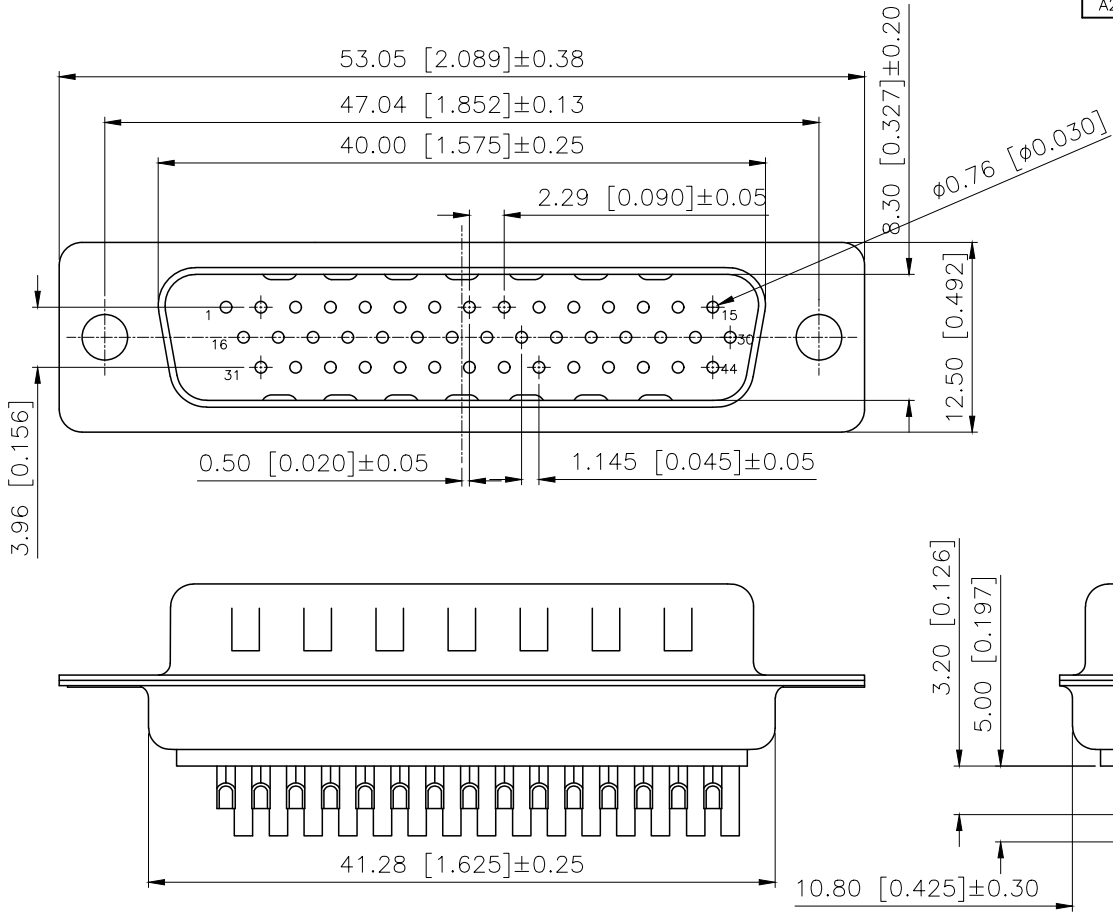


PART NO.:


X04 44 W X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Row No-Pin No: 44Pin
- ③Welding Board Angle:W-Male
- ④T:Tradutional C:Car-pin
- ⑤Planting Categoty:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
- ⑥Color:B-Black W-White BL-Blue
- ⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	±5°	 <i>C o n n e c t i o n</i>	DESIGN	阿树	VIEW: 	MODEL TYPE: D-SUB		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X0444WXXXX		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
www.xk-dg.cn						N/A	1/1	A2

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A1	N/A		料号说明pin数修改	2024.07.27
A2	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.10

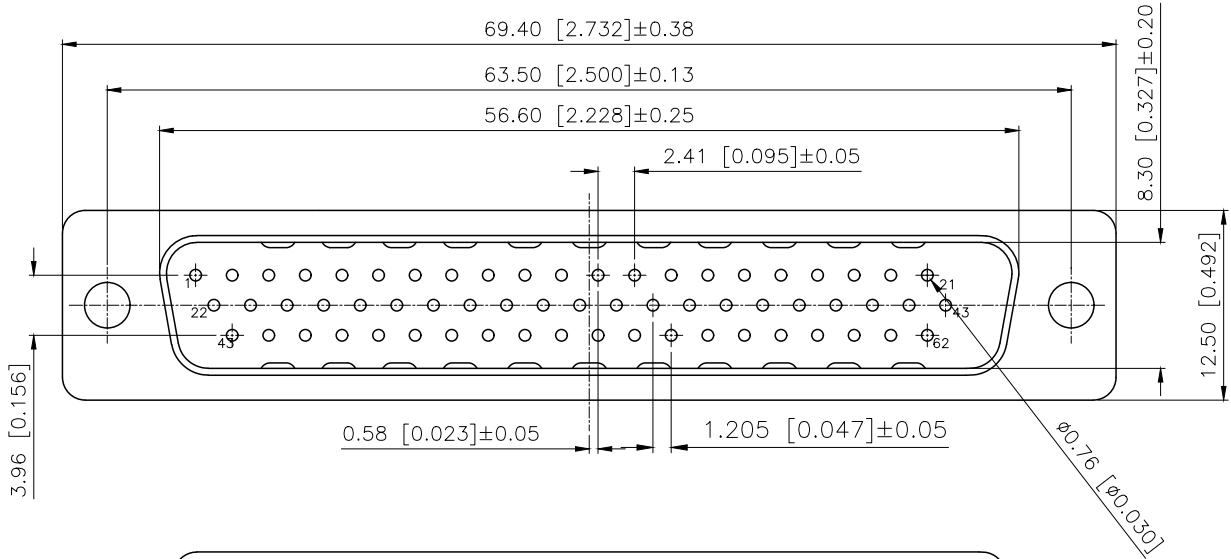

Specifications:

1.Voltage rating:250V AC/DC
额定电压: 250V AC/DC

2.Current rating:3A AC/DC
额定电流:3A AC/DC

3.Withstanding voltage:500V AC/minute
耐受电压:500V AC/分钟

4.Temperature range:-55℃~+105 ℃
温度范围:-55℃~+105 ℃



5.Insulation resistance:≥1000MΩ
绝缘电阻:≥1000MΩ

6.Contact resistance:≤30mΩ
接触电阻:≤30mΩ

7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0

8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀镍/镀锡/镀金

9.Terminal:Copper alloy
端子: 铜合金

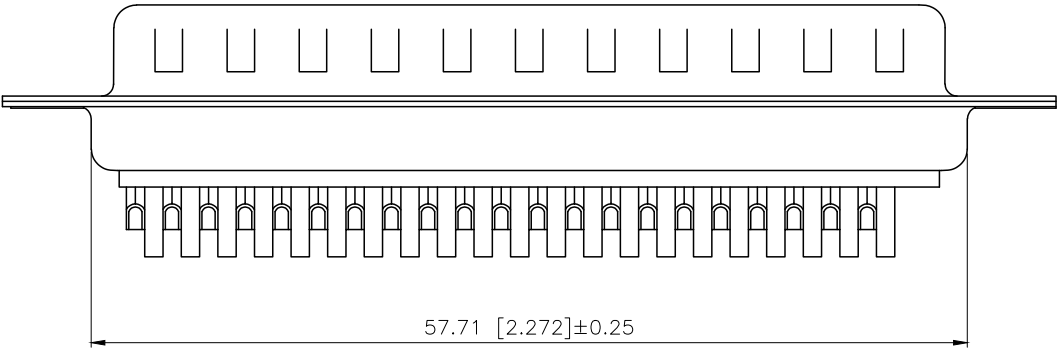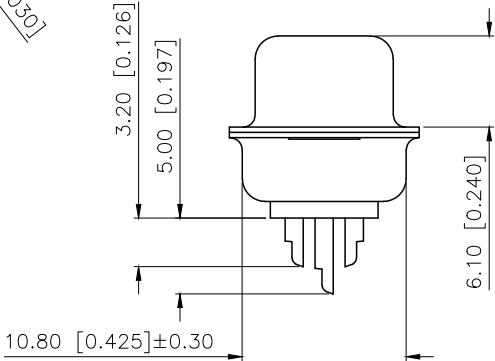

PART NO.:

X04 62 W X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Row No-Pin No; 62Pin
③Welding Board Angle:W-Male
④T:Tradutlional C:Car-pin
⑤Planting Categotry:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
⑥Color:B-Black W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

铆合方式	TYPE-1: 铆合	TYPE-2: 前铆实心螺母	TYPE-3: 后铆空心螺母	TYPE-4: 后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X0462WXXXX
APPROVED		SIZE:	A4	DWG NO.:	