

REV. 0
DCO 63913

COIL: @ 25°C

| SET | | RESET | |
|----------|-----------------|----------|-----------------|
| 975 OHMS | ±10% | 975 OHMS | ±10% |
| 26.5 | NOMINAL VOLTAGE | 26.5 | NOMINAL VOLTAGE |
| 13.5 | MUST OPERATE | 13.5 | MUST OPERATE |

ENVIRONMENT:


VIBRATION 10 Hz 3000 Hz 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

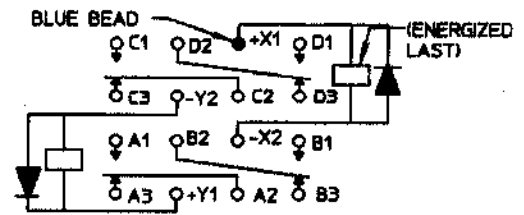

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. PBB 4/18/01 CK 4/18/01



CUST. QPL
CUST. NO. M39016/35-006M

TYPE '3SBM' RELAY

3SBM1112A2