


RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60seconds
 (260° C for 5 seconds)

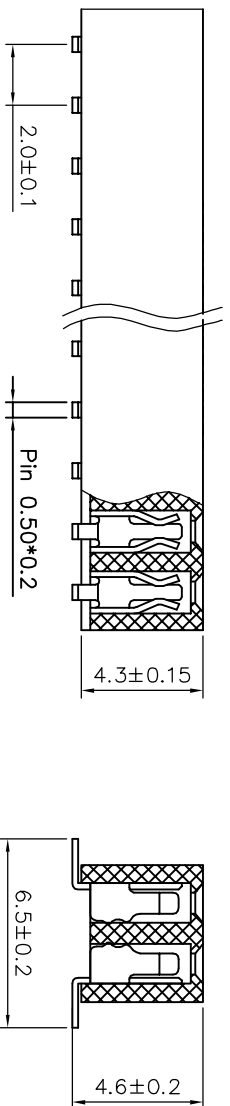

- (1) Pin Spacing: 200=2.0mm
- (2) Product Name: FH=Female Header
- (3) No. of Rows: 1=Single Row ; 2=Dual Row
- (4) No. of Pins Per Row: 1~40
- (5) Insulator Material Height: 43=4.3mm; 72=7.2mm
- (6) Connector Type: S=Straight; R=Right; Angle M=SMT
- (7) Connector Material Length: 24=2.4mm; 28=2.8mm
- (8) Insulator Material Width: 40=4.0mm; 45=4.5mm
- (9) Contact Plating: G0=Gold Flash; AU10=Au 1.0u"
- (10) Insulator Material Option:
 A=BK-PA6T; B=BK-PA46; C=KB-LCP; S=Special

深圳市金航标电子有限公司

WWW.BDS666.COM

KH-2FH-2X6P-H4.3-SMT

0755-83044319

UNLESS OTHERWISE SPECIFIED TOLERANCE

DRAWING NAME: 2.0FH 2XnPin H4.3 SMT

X : ±0.3 X° : ±5°
 X.X : ±0.2 X.X° : ±1°
 X.XX: ±0.1 X.XX° : ±0.5°

| | | | | | | | |
|------|----|-------|-----|-------------|--|------|-----|
| SIZE | A4 | SCALE | N:1 | PRODUCT NO. | | PAGE | 1/1 |
| REV | A | UNIT | mm | PROJECT | | | |

CHECKED: LI BEI LIN 12/03/07

CHECKED:

APPROVED:

| No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1 | 0.00 | 2.00 | 11 | 20.00 | 22.00 | 21 | 40.00 | 42.00 | 31 | 60.00 | 62.00 |
| 2 | 2.00 | 4.00 | 12 | 22.00 | 24.00 | 22 | 42.00 | 44.00 | 32 | 62.00 | 64.00 |
| 3 | 4.00 | 6.00 | 13 | 24.00 | 26.00 | 23 | 44.00 | 46.00 | 33 | 64.00 | 66.00 |
| 4 | 6.00 | 8.00 | 14 | 26.00 | 28.00 | 24 | 46.00 | 48.00 | 34 | 66.00 | 68.00 |
| 5 | 8.00 | 10.00 | 15 | 28.00 | 30.00 | 25 | 48.00 | 50.00 | 35 | 68.00 | 70.00 |
| 6 | 10.00 | 12.00 | 16 | 30.00 | 32.00 | 26 | 50.00 | 52.00 | 36 | 70.00 | 72.00 |
| 7 | 12.00 | 14.00 | 17 | 32.00 | 34.00 | 27 | 52.00 | 54.00 | 37 | 72.00 | 74.00 |
| 8 | 14.00 | 16.00 | 18 | 34.00 | 36.00 | 28 | 54.00 | 56.00 | 38 | 74.00 | 76.00 |
| 9 | 16.00 | 18.00 | 19 | 36.00 | 38.00 | 29 | 56.00 | 58.00 | 39 | 76.00 | 78.00 |
| 10 | 18.00 | 20.00 | 20 | 38.00 | 40.00 | 30 | 58.00 | 60.00 | 40 | 78.00 | 80.00 |