




features

- Excellent for high frequency applications
- Low DC resistance and high Q
- Operating temperature: -40°C ~ +125°C
- Low tolerance ±2% available
- Small size allows for high density mounting (1E, 1J, 2A, 2B)
- Marking: Yellow marking on blue protective coating (1E, 1J, 2A, 2B)
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

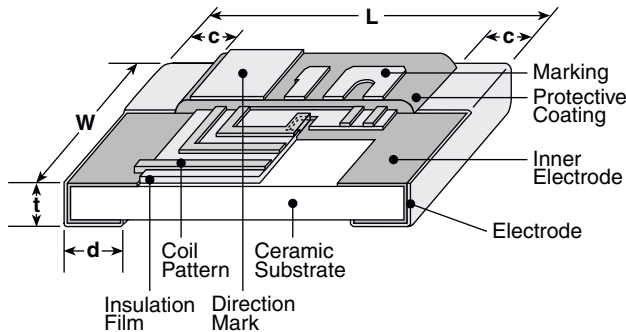

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1E (0402)	.039±.004 (1.0±0.1)	.02±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.02±.004 (0.5±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012±.004 (0.3±0.2)	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.2)	.016 ^{+0.008} _{-0.004} (0.4 ^{+0.2} _{-0.1})	.024±.004 (0.6±0.1)

Inductance Marking

Part 1J (nH)	Marking
1.0	L1
1.2	L2
1.5	L3
1.8	L4
2.2	22
2.7	27
3.3	33
3.9	39
4.7	47
5.6	56
6.8	68
8.2	82

Part 1J (nH)	Marking
10	10
12	12
15	15
18	H1
22	H2
27	H3
33	H4
39	H5
47	H6
56	H7
68	H8
82	H9

Part Marking	Value (nH) 2.2 - 8.2	Value (nH) 10 and higher
2A	Ex. = 2.2 = 2.2nH	Ex. = 15 = 15nH
2B	Ex. = 2N2 = 2.2nH	Ex. = 15N = 15nH

No marking on 1E (0402)

ordering information

New Part #	KL73	2A	T	TE	4N7	G
	Type	Size Code	Termination Material	Packaging	Nominal Inductance	Tolerance
		1E: 0402 1J: 0603 2A: 0805 2B: 1206	T: Sn	TP: 7" paper 2mm pitch (1E only - 10,000 pieces/reel) TE: 7" embossed plastic 4mm pitch (1J, 2A, 2B - 4,000 pieces/reel)	4N7: 4.7nH 47N: 47nH	B: ±0.1nH C: ±0.2nH G: ±2% J: ±5%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Nominal Inductance (nH)	Inductance Tolerance	Quality Factor Minimum	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Measured Frequency (MHz)**						
KL731ETTPN56B	0.56	B: ± 0.1 nH	7	14000	0.10	700	500						
KL731ETTPN68B	0.68												
KL731ETTPN82B	0.82												
KL731ETTP1N0*	1.0	B: ± 0.1 nH C: ± 0.2 nH	10	12000	0.15	650	500						
KL731ETTP1N2*	1.2			10000	0.20								
KL731ETTP1N5*	1.5			8000	0.25								
KL731ETTP1N8*	1.8			6000	0.30								
KL731ETTP2N2*	2.2			5000	0.50								
KL731ETTP2N7*	2.7			4000	1.00								
KL731ETTP3N3*	3.3			3000	1.50								
KL731ETTP3N9*	3.9			2500	2.00								
KL731ETTP4N7*	4.7			2000	3.00								
KL731ETTP5N6*	5.6			G: $\pm 2\%$ J: $\pm 5\%$	7			1500	5.00	150	200		
KL731ETTP6N8*	6.8	1000	350										
KL731ETTP8N2*	8.2	500											
KL731ETTP10N*	10					250							
KL731ETTP12N*	12						200						
KL731ETTP15N*	15							150					
KL731ETTP18N*	18								100				
KL731ETTP22N*	22											650	
KL731ETTP27N*	27												450
KL731ETTP33N*	33												
KL731JTTE1N0*	1.0			10	0.10					650	500		
KL731JTTE1N2*	1.2		15										
KL731JTTE1N5*	1.5	20											
KL731JTTE1N8*	1.8		10000										
KL731JTTE2N2*	2.2		8000	0.15									
KL731JTTE2N7*	2.7		6000	0.25									
KL731JTTE3N3*	3.3		5000	0.50		350							
KL731JTTE3N9*	3.9		4000										
KL731JTTE4N7*	4.7		3000										
KL731JTTE5N6*	5.6		2500				1.0	250					
KL731JTTE6N8*	6.8		2000										
KL731JTTE8N2*	8.2		1500		1.50				200				
KL731JTTE10N*	10	1000											
KL731JTTE12N*	12									750			
KL731JTTE15N*	15										500		
KL731JTTE18N*	18											350	
KL731JTTE22N*	22			250									
KL731JTTE27N*	27					150							
KL731JTTE33N*	33												100
KL731JTTE39N*	39						650						
KL731JTTE47N*	47							450					
KL731JTTE56N*	56		350										
KL731JTTE68N*	68	250											

* Add tolerance character (B, C, G, J)

** The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Nominal Inductance (nH)	Inductance Tolerance	Quality Factor Minimum	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Measured Frequency (MHz)**					
KL732ATTE1N0*	1.0	C: ±0.2nH	20	13000	0.25	900	500					
KL732ATTE1N2*	1.2			10000								
KL732ATTE1N5*	1.5			9000								
KL732ATTE1N8*	1.8		25	8000		0.50		800				
KL732ATTE2N2*	2.2			6000								
KL732ATTE2N7*	2.7			5000								
KL732ATTE3N3*	3.3			4500				700				
KL732ATTE3N9*	3.9			4000								
KL732ATTE4N7*	4.7			3000								
KL732ATTE5N6*	5.6			G: ±2% J: ±5%				20	2500	1.00	400	200
KL732ATTE6N8*	6.8	2000										
KL732ATTE8N2*	8.2	1500										
KL732ATTE10N*	10	15	1000		1.50	250						
KL732ATTE12N*	12		800									
KL732ATTE15N*	15		700			4.00						
KL732ATTE18N*	18		600									
KL732ATTE22N*	22	C: ±0.2nH	25		9000	0.25	1000	500				
KL732ATTE27N*	27				7000							
KL732ATTE33N*	33				6000							
KL732ATTE39N*	39		35	5000	0.50		900					
KL732ATTE47N*	47			4500								
KL732ATTE56N*	56			4000			800					
KL732ATTE68N*	68			3500								
KL732ATTE82N*	82			3000								
KL732ATTE100*	100			G: ±2% J: ±5%			40		2500	1.00	500	200
KL732BTTE2N2*	2.2								2000			
KL732BTTE2N7*	2.7	1500										
KL732BTTE3N3*	3.3	25	1000		2.00	400						
KL732BTTE3N9*	3.9		500									
KL732BTTE4N7*	4.7		400									
KL732BTTE5N6*	5.6		200									
KL732BTTE6N8*	6.8	15	500		5.00	150						
KL732BTTE8N2*	8.2		400									
KL732BTTE10N*	10		400									

* Add tolerance character (B, C, G, J)

** The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

For L-Frequency and Q-Frequency Characteristics, see Environmental Applications at www.koaspeer.com





environmental applications

Performance Characteristics





Parameter	Requirements Maximum Limit	Δ L/L Δ Q/Q Typical	Test Method
Resistance to Soldering Heat	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.5\%$ Δ Q/Q: $\pm 1.5\%$	260°C \pm 5°C, 10s \pm 1s
Rapid Change of Temperature	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.5\%$ Δ Q/Q: $\pm 1.6\%$	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.7\%$ Δ Q/Q: $\pm 1.2\%$	-40°C \pm 3°C, 1000h
High Temperature Exposure	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.4\%$ Δ Q/Q: $\pm 1.3\%$	125°C \pm 2°C, 1000h
Moisture Exposure	Without distinct damage in appearance and construction Insulation resistance: 50M Ω or more Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.4\%$ Δ Q/Q: $\pm 1.4\%$	40°C \pm 2°C, 90%~95%RH, 1000h
Resistance to Solvent	Without distinct damage in appearance, construction and marking Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.6\%$ Δ Q/Q: $\pm 1.2\%$	Immerse the inductors for 30s \pm 5s in the reagent (20°C ~ 25°C) of JIS K8839 (1995)

Frequency Characteristics Test equipment: HP4291B impedance analyzer (1E, 1J, 2A, 2B)

L - Frequency Characteristics

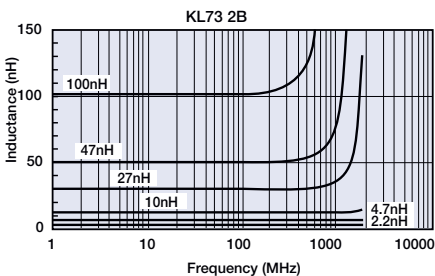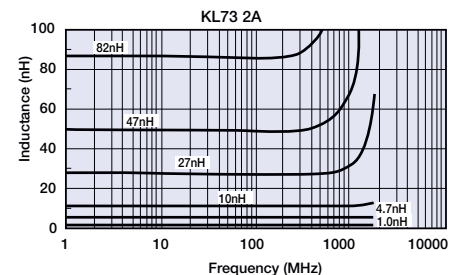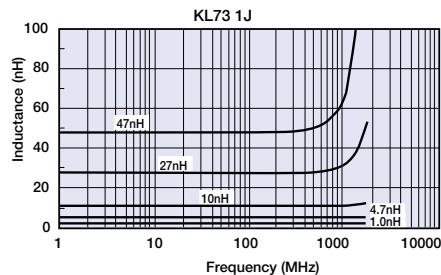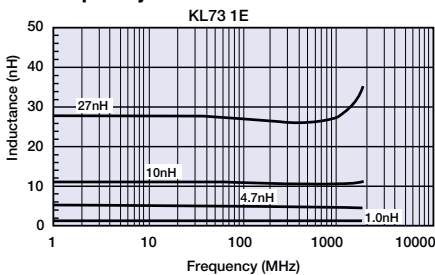

Q - Frequency Characteristics

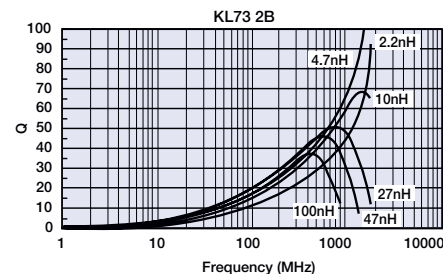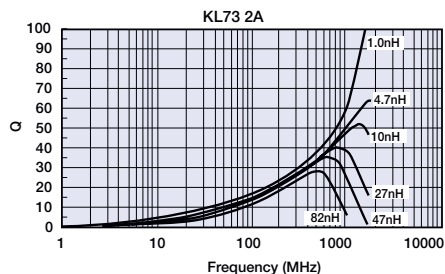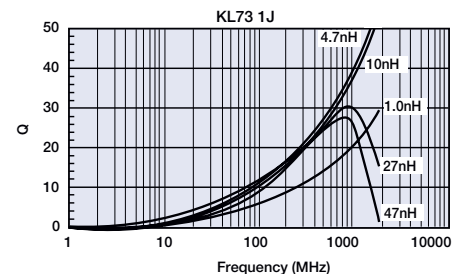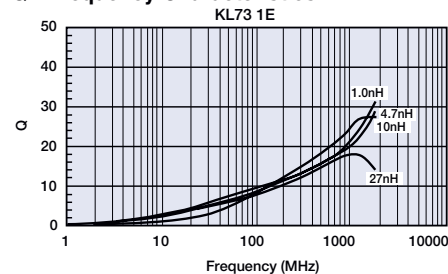

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/21/14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[KL731ETTP1N5C](#) [KL731ETTP8N2G](#) [KL732ATTE1N5C](#) [KL731JTTE6N8J](#) [KL731JTTE22NJ](#) [KL731JTTE56NJ](#)
[KL731JTTE68NJ](#) [KL732ATTE47NG](#) [KL732BLTE10NJ](#) [KL731JTTE39NG](#) [KL731ELTP10NG](#) [KL731JLTE56NG](#)
[KL731ELTP1N0C](#) [KL731JLTE6N8G](#) [KL731JLTE1N8C](#) [KL731JLTE15NJ](#) [KL732ALTE3N9C](#) [KL731ELTPN68B](#)
[KL732BLTE5N6G](#) [KL732ALTE2N2C](#) [KL731JLTE2N2C](#) [KL731ELTPN56B](#) [KL732ALTE4N7C](#) [KL732BLTE15NG](#)
[KL732ALTE10NJ](#) [KL732ALTE1N0C](#) [KL732ALTE39NG](#) [KL731JLTE10NG](#) [KL732ALTE15NG](#) [KL732ALTE22NG](#)
[KL731JLTE4N7C](#) [KL731ELTP1N8C](#) [KL731JLTE12NJ](#) [KL731JLTE39NJ](#) [KL732ALTE8N2G](#) [KL731ELTP8N2G](#)
[KL731ETTP10NG](#) [KL731ETTP12NG](#) [KL731ETTP1N0C](#) [KL731ETTP1N8C](#) [KL731ETTP4N7C](#) [KL731ETTP6N8G](#)
[KL731ETTPN56B](#) [KL731ETTPN68B](#) [KL731ETTPN82B](#) [KL731JLTE18NG](#) [KL731JLTE2N7C](#) [KL731JLTE39NG](#)
[KL731JTTE10NG](#) [KL731JTTE12NG](#) [KL731JTTE12NJ](#) [KL731JTTE15NG](#) [KL731JTTE15NJ](#) [KL731JTTE1N0C](#)
[KL731JTTE1N2C](#) [KL731JTTE1N5C](#) [KL731JTTE1N8C](#) [KL731JTTE27NG](#) [KL731JTTE2N2C](#) [KL731JTTE2N7C](#)
[KL731JTTE33NG](#) [KL731JTTE39NJ](#) [KL731JTTE3N3C](#) [KL731JTTE3N9C](#) [KL731JTTE47NJ](#) [KL731JTTE4N7C](#)
[KL731JTTE56NG](#) [KL731JTTE5N6G](#) [KL731JTTE6N8G](#) [KL731JTTE8N2G](#) [KL732ATTE10NG](#) [KL732ATTE10NJ](#)
[KL732ATTE12NJ](#) [KL732ATTE15NG](#) [KL732ATTE15NJ](#) [KL732ATTE18NJ](#) [KL732ATTE1N0C](#) [KL732ATTE1N2C](#)
[KL732ATTE22NG](#) [KL732ATTE22NJ](#) [KL732ATTE2N2C](#) [KL732ATTE2N7C](#) [KL732ATTE33NG](#) [KL732ATTE39NG](#)
[KL732ATTE3N3C](#) [KL732ATTE3N9C](#) [KL732ATTE47NJ](#) [KL732ATTE4N7C](#) [KL732ATTE5N6G](#) [KL732ATTE68NG](#)
[KL732ATTE6N8G](#) [KL732ATTE6N8J](#) [KL732ATTE82NG](#) [KL732ATTE8N2G](#) [KL732ATTE8N2J](#) [KL732BTTE15NG](#)
[KL732BTTE15NJ](#) [KL732BTTE47NJ](#) [KL732BTTE5N6G](#) [KL732BTTE8N2G](#)