
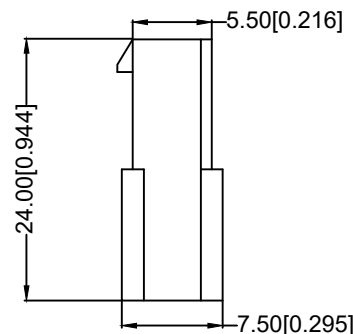
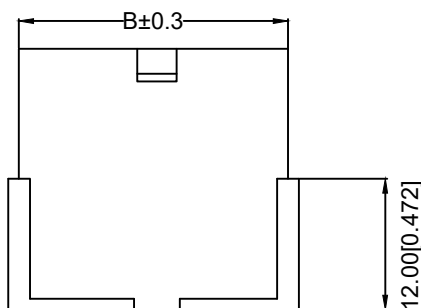

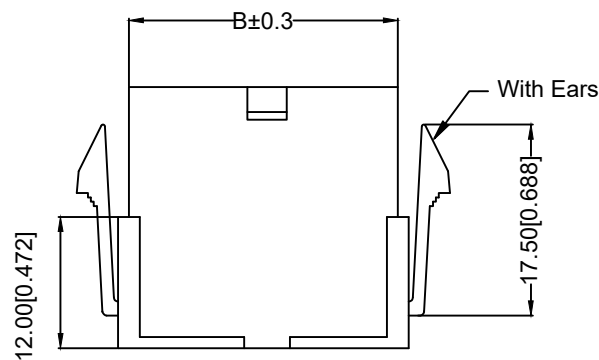


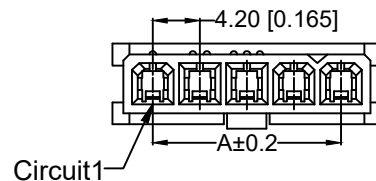

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:9A AC/DC

额定电流: 9A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C - $+85^{\circ}\text{C}$

Insulation resistance: $\geq 1000\text{M}\Omega$

绝缘电阻: $\geq 100\text{M}\Omega$

Contact resistance: $\leq 10\text{m}\Omega$

接触电阻: $\leq 10\text{m}\Omega$

After environmental testing: $\leq 20\text{m}\Omega$

环境测试后: ≤ 20 兆欧

X9357 H F - XX X-XX XX
 (01) (02) (03) (04) (05) (06) (07)

01 Series No.

02 Category:H-HSG

03 Welding Board Angle:

M-Male housing

04 Row No.-Pin No.:XX-02P~16P

05 Plug the Pin & special No.:

I-Without the Wing G-With the Wing

06 Material:N0-PA66 94V-0

N2-PA66 94V-2

07 Color:Blank-Natural Color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	4.20	9.80	08	29.40	35.00
03	8.40	14.00	09	33.60	39.20
04	12.60	18.20	10	37.80	43.40
05	16.80	22.40	11	42.00	47.60
06	21.00	26.60	12	46.20	51.80
07	25.20	30.80			

X9357HF-XXG-N2	Nylon 66 94V-2	X9357TM	X9357W Or 9357H	With Ears
X9357HF-XXI-N2	Nylon 66 94V-2			Without Ears
X9357HF-XXG-N0	Nylon 66 94V-0			With Ears
X9357HF-XXI-N0	Nylon 66 94V-0			Without Ears
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal	Note

						DSND		SCALE: N/A		MODEL TYPE: 4.2mm Crimp Style Connector		
ΔX					ANGLAR	±5°		DWN	VIEW: 	PART NO.: X9357HF-XXG-N2		
ΔX					L ≤ 4	±0.2		CHKD	UNIT: mm/in	DWG NO.: X-X9357HF-XXG-N2		
ΔX					4 < L ≤ 16	±0.3		APPD	SIZE: A4			
ΔX					16 < L ≤ 63	±0.4						
MARK	DESCRIPTION			DATE	REVISED	APPROVED	L > 63		±0.5			
REVISIONS						UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO., LIMITED			
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn									WEIGHT SHEET REVISION			
									1/1 A0			