
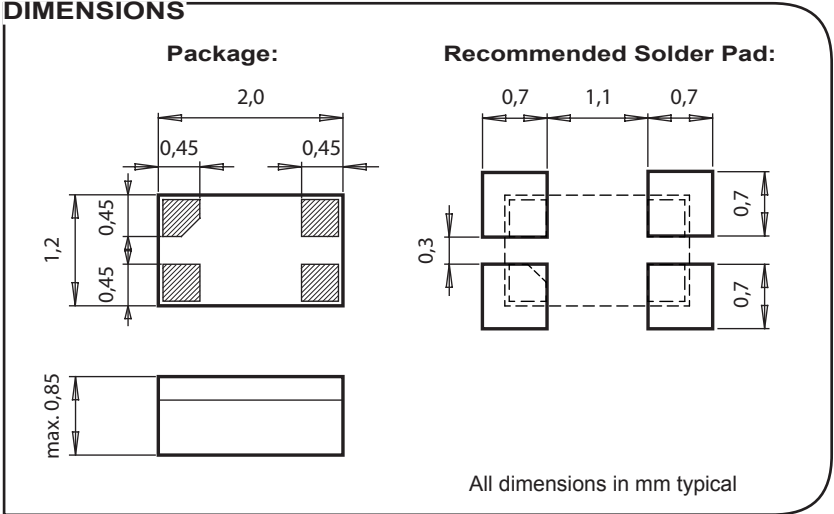


OV-0100-C8

Low Power Clock Oscillator 100.000 kHz

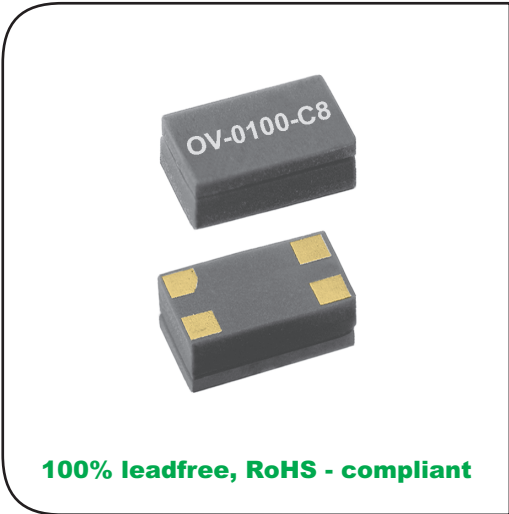


- Oscillator with integrated XTAL
- Very tight frequency tolerance
- Ultra-miniature ceramic package
- High shock and vibration resistance
- Very low power consumption
- Low aging rate
- Available for Medical Implantable applications


DESCRIPTION:
 This very small SMD ceramic package has been specially designed to combine the 100.000 kHz crystal unit with the CMOS-based oscillator circuit. Ultra Low Power consumption, as low as 700 nA, are made possible through 100.000 kHz Tuning-Fork-Crystals and sophisticated CMOS-circuitry.

For pick-and-place equipment, the parts are available in 8 mm tape:
 7" (178 mm) reel with 1'000 oscillators
 7" (178 mm) reel with 3'000 oscillators

BLOCK DIAGRAM:

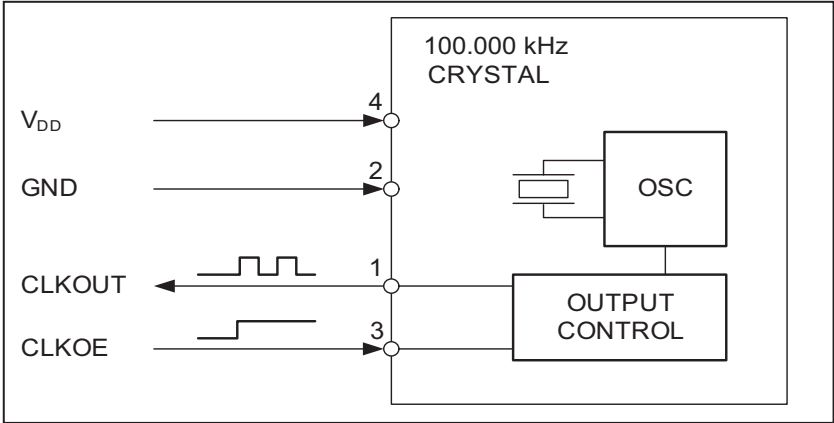

PIN CONNECTIONS TOP VIEW:

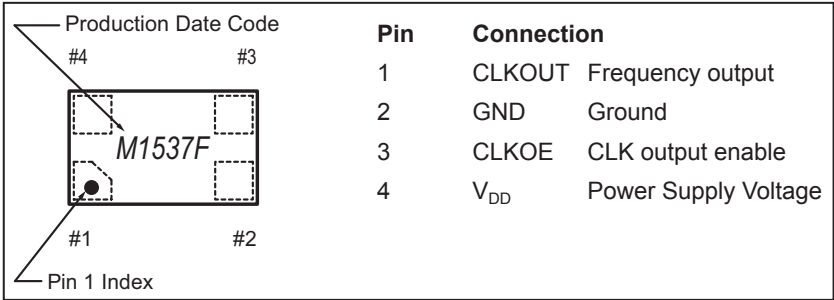

ELECTRICAL CHARACTERISTICS AT 25°C:

Output Frequency	F	100.000	kHz
Frequency tolerance ¹⁾	$\Delta F/F$	+/-100	ppm
Supply voltage	V_{DD}	1.6 – 5.5	V
Current consumption (typ./max.) ²⁾	I_{DD}	0.7 / 0.95	μA
Duty cycle (min./max.)		40 / 60	%
Output voltage (high) ³⁾	V_{OH}	$V_{DD} - 0.4$	V
Output voltage (low) ⁴⁾	V_{OL}	Gnd +0.4	V
Output Load	HCMOS	15	pF
Output Current	I_{OH}	1	mA
	I_{OL}	-1	mA
Output rise time (max.) ⁵⁾	t_r	70	ns
Output fall time (max.) ⁵⁾	t_f	70	ns
Start up time (max.)	t_{start}	0.5	s
CLK Output Enable (High)	V_{IH}	80% V_{DD} min.	V
CLK Output Disable (Low)	V_{IL}	20% V_{DD} max.	V
Voltage coefficient (max.)		+/-3	ppm/V
Aging first year max. @ 25°C	$\Delta F/F$	+/-3	ppm
Turnover temperature (typ.)	T_0	28 +/-5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \pm 10\%$	ppm

1) Tighter tolerances on request.

2) $V_{DD} = 3.0$ V, CLKOE = LOW.

3) $I_{OH} = -1.0$ mA.

4) $I_{OL} = 1.0$ mA.

5) $C_L = 10$ pF, 10% to 90%.


ENVIRONMENTAL CHARACTERISTICS:

	Conditions	Max. Dev.
Storage temp. range	-55 to +125°C	
TA Operating temperature range	-40 to +85°C	
Shock resistance	$\Delta F/F$ 5000 g, 0.3 ms, 1/2 sine	+/-5 ppm
Vibration resistance	$\Delta F/F$ 20 g / 10–2000 Hz	+/-5 ppm

TERMINATIONS AND PROCESSING:

Package-Type	Termination	Processing
Ceramic	For SMD mounting Au plated pads	Reflow soldering 260°C / 20 s max.

FREQUENCY TEMPERATURE CHARACTERISTICS:

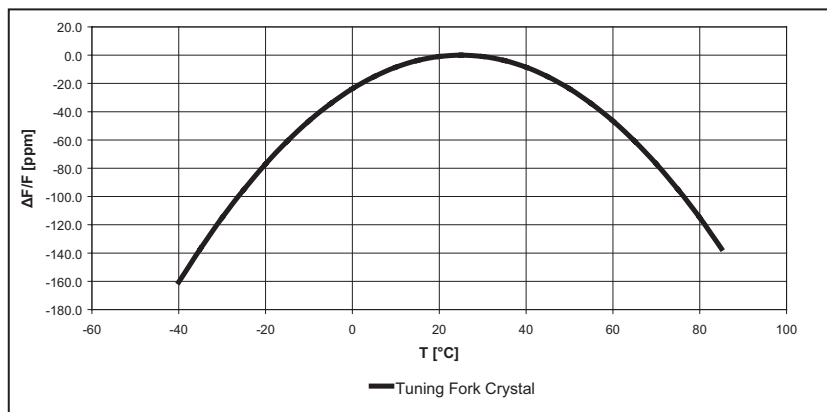

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Crystal:](#)

[203276-MC01](#) [203351-AA00](#) [OM-0100-C8-100.00kHz-20PPM-TA-QC](#)